
CogDL Documentation


Release 0.5.2

KEG

Dec 16, 2021

GET STARTED

1 News	3
2 Citing CogDL	5
2.1 Install	5
2.2 Quick Start	6
2.3 Node Classification	7
2.4 Graph Storage	8
2.5 Using customized GNN	12
2.6 Using customized Dataset	14
2.7 data	16
2.8 datasets	20
2.9 models	28
2.10 data wrappers	58
2.11 model wrappers	64
2.12 layers	72
2.13 options	79
2.14 utils	79
2.15 experiments	87
2.16 pipelines	87
3 Indices and tables	89
Python Module Index	91
Index	93

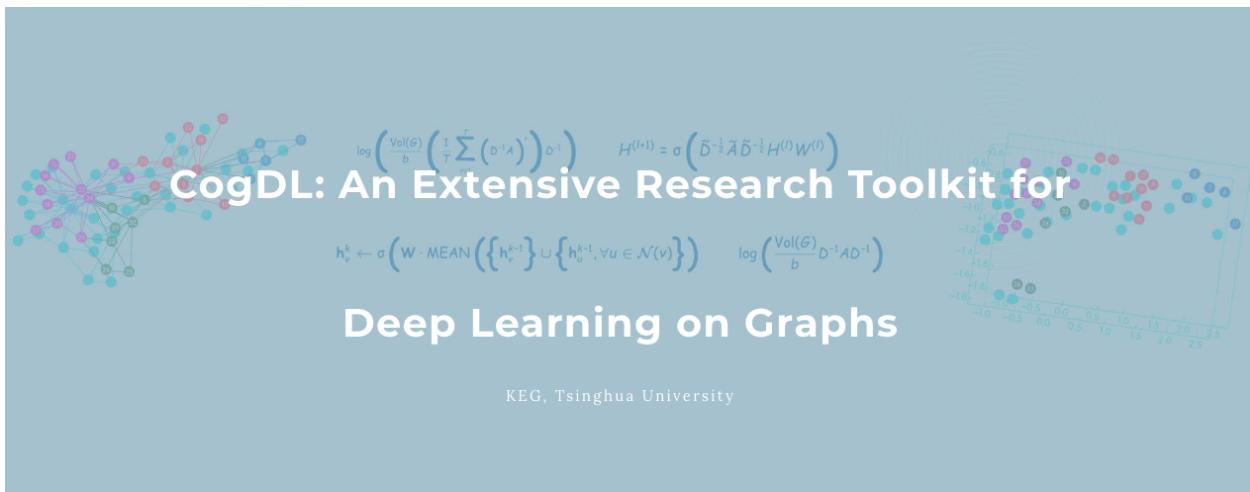

CogDL is a graph representation learning toolkit that allows researchers and developers to easily train and compare baseline or customized models for node classification, graph classification, and other important tasks in the graph domain.

We summarize the contributions of CogDL as follows:

- **Efficiency:** CogDL utilizes well-optimized operators to speed up training and save GPU memory of GNN models.
- **Ease of Use:** CogDL provides easy-to-use APIs for running experiments with the given models and datasets using hyper-parameter search.
- **Extensibility:** The design of CogDL makes it easy to apply GNN models to new scenarios based on our framework.

CHAPTER
ONE

NEWS

- The new **v0.5.2 release** adds a GNN example for ogbn-products and updates geom datasets. It also fixes some potential bugs including setting devices, using cpu for inference, etc.
- The new **v0.5.1 release** adds fast operators including SpMM (cpu version) and scatter_max (cuda version). It also adds lots of datasets for node classification.
- The new **v0.5.0 release** designs and implements a unified training loop for GNN. It introduces *DataWrapper* to help prepare the training/validation/test data and *ModelWrapper* to define the training/validation/test steps.
- The new **v0.4.1 release** adds the implementation of Deep GNNs and the recommendation task. It also supports new pipelines for generating embeddings and recommendation. Welcome to join our tutorial on KDD 2021 at 10:30 am - 12:00 am, Aug. 14th (Singapore Time). More details can be found in <https://kdd2021graph.github.io/>.
- The new **v0.4.0 release** refactors the data storage (from Data to Graph) and provides more fast operators to speed up GNN training. It also includes many self-supervised learning methods on graphs. BTW, we are glad to announce that we will give a tutorial on KDD 2021 in August. Please see this [link](#) for more details.
- The new **v0.3.0 release** provides a fast spmm operator to speed up GNN training. We also release the first version of [CogDL paper](#) in arXiv. You can join [our slack](#) for discussion.
- The new **v0.2.0 release** includes easy-to-use `experiment` and `pipeline` APIs for all experiments and applications. The `experiment` API supports automl features of searching hyper-parameters. This release also provides `OAGBert` API for model inference (`OAGBert` is trained on large-scale academic corpus by our lab). Some features and models are added by the open source community (thanks to all the contributors).
- The new **v0.1.2 release** includes a pre-training task, many examples, OGB datasets, some knowledge graph embedding methods, and some graph neural network models. The coverage of CogDL is increased to 80%. Some new APIs, such as `Trainer` and `Sampler`, are developed and being tested.
- The new **v0.1.1 release** includes the knowledge link prediction task, many state-of-the-art models, and `optuna` support. We also have a [Chinese WeChat post](#) about the CogDL release.

CHAPTER TWO

CITING COGDL

Please cite [our paper](#) if you find our code or results useful for your research:

```
@article{cen2021cogdl,
    title={CogDL: Toolkit for Deep Learning on Graphs},
    author={Yukuo Cen and Zhenyu Hou and Yan Wang and Qibin Chen and Yizhen Luo and
←Xingcheng Yao and Aohan Zeng and Shiguang Guo and Peng Zhang and Guohao Dai and Yu
→Wang and Chang Zhou and Hongxia Yang and Jie Tang},
    journal={arXiv preprint arXiv:2103.00959},
    year={2021}
}
```

2.1 Install

- Python version ≥ 3.7
- PyTorch version $\geq 1.7.1$

Please follow the instructions here to install PyTorch (<https://github.com/pytorch/pytorch#installation>).

When PyTorch has been installed, cogdl can be installed using pip as follows:

```
pip install cogdl
```

Install from source via:

```
pip install git+https://github.com/thudm/cogdl.git
```

Or clone the repository and install with the following commands:

```
git clone git@github.com:THUDM/cogdl.git
cd cogdl
pip install -e .
```

If you want to use the modules from PyTorch Geometric (PyG), you can follow the instructions to install PyTorch Geometric (https://github.com/rusty1s/pytorch_geometric/#installation).

2.2 Quick Start

2.2.1 API Usage

You can run all kinds of experiments through CogDL APIs, especially `experiment()`. You can also use your own datasets and models for experiments. A quickstart example can be found in the [quick_start.py](#). More examples are provided in the [examples/](#).

```
from cogdl import experiment

# basic usage
experiment(dataset="cora", model="gcn")

# set other hyper-parameters
experiment(dataset="cora", model="gcn", hidden_size=32, epochs=200)

# run over multiple models on different seeds
experiment(dataset="cora", model=["gcn", "gat"], seed=[1, 2])

# automl usage
def search_space(trial):
    return {
        "lr": trial.suggest_categorical("lr", [1e-3, 5e-3, 1e-2]),
        "hidden_size": trial.suggest_categorical("hidden_size", [32, 64, 128]),
        "dropout": trial.suggest_uniform("dropout", 0.5, 0.8),
    }

experiment(dataset="cora", model="gcn", seed=[1, 2], search_space=search_space)
```

2.2.2 Command-Line Usage

You can also use `python scripts/train.py --dataset example_dataset --model example_model` to run `example_model` on `example_data`.

- `--dataset`, dataset name to run, can be a list of datasets with space like `cora citeseer`. Supported datasets include `cora`, `citeseer`, `pumbed`, `ppi`, `flickr`. More datasets can be found in the [cogdl/datasets](#).
- `--model`, model name to run, can be a list of models like `gcn gat`. Supported models include `gcn`, `gat`, `graphsage`. More models can be found in the [cogdl/models](#).

For example, if you want to run GCN and GAT on the Cora dataset, with 5 different seeds:

```
`bash python scripts/train.py --dataset cora --model gcn gat --seed 0 1 2 3 4`
```

Expected output:

Variant	test_acc	val_acc
('cora', 'gcn')	0.8050±0.0047	0.7940±0.0063
('cora', 'gat')	0.8234±0.0042	0.8088±0.0016

If you want to run parallel experiments on your server with multiple GPUs on multiple models/datasets:

```
python scripts/parallel_train.py --dataset cora citeseer --model gcn gat --devices 0 1 --
˓→seed 0 1 2 3 4
```

Expected output:

Variant	test_acc	val_acc
('cora', 'gcn')	0.8050±0.0047	0.7940±0.0063
('cora', 'gat')	0.8234±0.0042	0.8088±0.0016
('citeseer', 'gcn')	0.6938±0.0133	0.7108±0.0148
('citeseer', 'gat')	0.7098±0.0053	0.7244±0.0039

2.3 Node Classification

Graph neural networks(GNN) have great power in tackling graph-related tasks. In this chapter, we take node classification as an example and show how to use CogDL to finish a workflow using GNN. In supervised setting, node classification aims to predict the ground truth label for each node.

2.3.1 Quick Start

CogDL provides abundant of common benchmark datasets and GNN models. On the one hand, you can simply start a running using models and datasets in CogDL. This is convenient when you want to test the reproducibility of proposed GNN or get baseline results in different datasets.

```
from cogdl import experiment
experiment(model="gcn", dataset="cora")
```

Or you can create each component separately and manually run the process using `build_dataset`, `build_model` in CogDL.

```
from cogdl import experiment
from cogdl.datasets import build_dataset
from cogdl.models import build_model
from cogdl.options import get_default_args

args = get_default_args(model="gcn", dataset="cora")
dataset = build_dataset(args)
model = build_model(args)
experiment(model=model, dataset=dataset)
```

As show above, model/dataset/task are 3 key components in establishing a training process. In fact, CogDL also supports customized model and datasets. This will be introduced in next chapter. In the following we will briefly show the details of each component.

2.3.2 Save trained model

CogDL supports saving the trained model with `checkpoint_path` in command line or API usage. For example:

```
experiment(model="gcn", dataset="cora", checkpoint_path="gcn_cora.pt")
```

When the training stops, the model will be saved in `gcn_cora.py`. If you want to continue the training from previous checkpoint with different parameters(such as learning rate, weight decay and etc.), keep the same model parameters (such as hidden size, model layers) and do it as follows:

```
experiment(model="gcn", dataset="cora", checkpoint_path="gcn_cora.pt", resume_
˓→training=True)
```

In command line usage, the same results can be achieved with `--checkpoint-path {path}` and `--resume-training`.

2.3.3 Save embeddings

Graph representation learning (network embedding and unsupervised GNNs) aims to get node representation. The embeddings can be used in various downstream applications. CogDL will save node embeddings in the given path specified by `--save-emb-path {path}`.

```
experiment(model="prone", dataset="blogcatalog", save_emb_path="../embeddings/prone_blog.
˓→npy")
```

Evaluation on node classification will run as the end of training. We follow the same experimental settings used in DeepWalk, Node2Vec and ProNE. We randomly sample different percentages of labeled nodes for training a liblinear classifier and use the remaining for testing. We repeat the training for several times and report the average Micro-F1. By default, CogDL samples 90% labeled nodes for training for one time. You are expected to change the setting with `--num-shuffle` and `--training-percents` to your needs.

In addition, CogDL supports evaluating node embeddings without training in different evaluation settings. The following code snippet evaluates the embedding we get above:

```
experiment(
    model="prone",
    dataset="blogcatalog",
    load_emb_path="../embeddings/prone_blog.npy",
    num_shuffle=5,
    training_percents=[0.1, 0.5, 0.9]
)
```

You can also use command line to achieve the same results

```
# Get embedding
python script/train.py --model prone --dataset blogcatalog

# Evaluate only
python script/train.py --model prone --dataset blogcatalog --load-emb-path ./embeddings/
˓→prone_blog.npy --num-shuffle 5 --training-percents 0.1 0.5 0.9
```

2.4 Graph Storage

A graph is used to store information of structured data. CogDL represents a graph with a `cogdl.data.Graph` object. Briefly, a `Graph` holds the following attributes:

- `x`: Node feature matrix with shape `[num_nodes, num_features]`, `torch.Tensor`
- `edge_index`: COO format sparse matrix, `Tuple`
- `edge_weight`: Edge weight with shape `[num_edges,]`, `torch.Tensor`
- `edge_attr`: Edge attribute matrix with shape `[num_edges, num_attr]`

- **y**: Target labels of each node, with shape `[num_nodes,]` for single label case and `[num_nodes, num_labels]` for mult-label case
- **row_indptr**: Row index pointer for CSR sparse matrix, `torch.Tensor`.
- **col_indices**: Column indices for CSR sparse matrix, `torch.Tensor`.
- **num_nodes**: The number of nodes in graph.
- **num_edges**: The number of edges in graph.

The above are the basic attributes but are not necessary. You may define a graph with `g = Graph(edge_index=edges)` and omit the others. Besides, Graph is not restricted to these attributes and other self-defined attributes, e.x. `graph.mask = mask`, are also supported.

Graph stores sparse matrix with COO or CSR format. COO format is easier to add or remove edges, e.x. `add_self_loops`, and CSR is stored for fast message-passing. Graph automatically convert between two formats and you can use both on demands without worrying. You can create a Graph with edges or assign edges to a created graph. `edge_weight` will be automatically initialized as all ones, and you can modify it to fit your need.

```
import torch
from cogdl.data import Graph
edges = torch.tensor([[0,1],[1,3],[2,1],[4,2],[0,3]]).t()
g = Graph()
g.edge_index = edges
g = Graph(edge_index=edges) # equivalent to that above
print(g.edge_weight)
>> tensor([1., 1., 1., 1., 1.])
g.num_nodes
>> 5
g.num_edges
>> 5
g.edge_weight = torch.rand(5)
print(g.edge_weight)
>> tensor([0.8399, 0.6341, 0.3028, 0.0602, 0.7190])
```

We also implement commonly used operations in Graph:

- `add_self_loops`: add self loops for nodes in graph,

$$\hat{A} = A + I$$

- `add_remaining_self_loops`: add self-loops for nodes without it.

- `sym_norm`: symmetric normalization of `edge_weight` used *GCN*:

$$\hat{A} = D^{-1/2}AD^{-1/2}$$

- `row_norm`: row-wise normalization of `edge_weight`:

$$\hat{A} = D^{-1}A$$

- `degrees`: get degrees for each node. For directed graph, this function returns in-degrees of each node.

```
import torch
from cogdl.data import Graph
edge_index = torch.tensor([[0,1],[1,3],[2,1],[4,2],[0,3]]).t()
g = Graph(edge_index=edge_index)
>> Graph(edge_index=[2, 5])
g.add_remaining_self_loops()
```

(continues on next page)

(continued from previous page)

```
>> Graph(edge_index=[2, 10], edge_weight=[10])
>> print(edge_weight) # tensor([1., 1., ..., 1.])
g.row_norm()
>> print(edge_weight) # tensor([0.3333, ..., 0.50])
```

- `subgraph`: get a subgraph containing given nodes and edges between them.
- `edge_subgraph`: get a subgraph containing given edges and corresponding nodes.
- `sample_adj`: sample a fixed number of neighbors for each given node.

```
from cogdl.datasets import build_dataset_from_name
g = build_dataset_from_name("cora")[0]
g.num_nodes
>> 2707
g.num_edges
>> 10184
# Get a subgraph containing nodes [0, ..., 99]
sub_g = g.subgraph(torch.arange(100))
>> Graph(x=[100, 1433], edge_index=[2, 18], y=[100])
# Sample 3 neighbors for each nodes in [0, ..., 99]
nodes, adj_g = g.sample_adj(torch.arange(100), size=3)
>> Graph(edge_index=[2, 300]) # adj_g
```

- `train/eval`: In inductive settings, some nodes and edges are unseen during training, `train/eval` provides access to switching backend graph for training/evaluation. In transductive setting, you may ignore this.

```
# train_step
model.train()
graph.train()

# inference_step
model.eval()
graph.eval()
```

2.4.1 Mini-batch Graphs

In node classification, all operations are in one single graph. But in tasks like graph classification, we need to deal with many graphs with mini-batch. Datasets for graph classification contains graphs which can be accessed with index, e.x. `data[2]`. To support mini-batch training/inference, CogDL combines graphs in a batch into one whole graph, where adjacency matrices form sparse block diagonal matrices and others(node features, labels) are concatenated in node dimension. `cogdl.data.DataLoader` handles the process.

```
from cogdl.data import DataLoader
from cogdl.datasets import build_dataset_from_name

dataset = build_dataset_from_name("mutag")
>> MUTAGDataset(188)
dataswet[0]
>> Graph(x=[17, 7], y=[1], edge_index=[2, 38])
loader = DataLoader(dataset, batch_size=8)
for batch in loader:
```

(continues on next page)

(continued from previous page)

```

model(batch)
>> Batch(x=[154, 7], y=[8], batch=[154], edge_index=[2, 338])

```

`batch` is an additional attributes that indicate the respective graph the node belongs to. It is mainly used to do global pooling, or called *readout* to generate graph-level representation. Concretely, `batch` is a tensor like:

$$batch = [0, \dots, 0, 1, \dots, 1, N - 1, \dots, N - 1]$$

The following code snippet shows how to do global pooling to sum over features of nodes in each graph:

```

def batch_sum_pooling(x, batch):
    batch_size = int(torch.max(batch.cpu())) + 1
    res = torch.zeros(batch_size, x.size(1)).to(x.device)
    out = res.scatter_add_(
        dim=0,
        index=batch.unsqueeze(-1).expand_as(x),
        src=x
    )
    return out

```

2.4.2 Editing Graphs

Mutation or changes can be applied to edges in some settings. In such cases, we need to *generate* a graph for calculation while keep the original graph. CogDL provides `graph.local_graph` to set up a local scope and any out-of-place operation will not reflect to the original graph. However, in-place operation will affect the original graph.

```

graph = build_dataset_from_name("cora")[0]
graph.num_edges
>> 10184
with graph.local_graph():
    mask = torch.arange(100)
    row, col = graph.edge_index
    graph.edge_index = (row[mask], col[mask])
    graph.num_edges
    >> 100
graph.num_edges
>> 10184

graph.edge_weight
>> tensor([1., ..., 1.])
with graph.local_graph():
    graph.edge_weight += 1
graph.edge_weight
>> tensor([2., ..., 2.])

```

2.4.3 Common benchmarks

CogDL provides a bunch of commonly used datasets for graph tasks like node classification, graph classification and many others. You can access them conveniently shown as follows. Statistics of datasets are on this [page](#).

```
from cogdl.datasets import build_dataset_from_name, build_dataset
dataset = build_dataset_from_name("cora")
dataset = build_dataset(args) # args.dataet = "cora"
```

For all datasets for node classification, we use *train_mask*, *val_mask*, *test_mask* to denote train/validation/test split for nodes.

2.5 Using customized GNN

Sometimes you would like to design your own GNN module or use GNN for other purposes. In this chapter, we introduce how to use GNN layer in CogDL to write your own GNN model and how to write a GNN layer from scratch.

2.5.1 GNN layers in CogDL to Define model

CogDL has implemented popular GNN layers in `cogdl.layers`, and they can serve as modules to help design new GNNs. Here is how we implement Jumping Knowledge Network (JKNet) with `GCNLayer` in CogDL.

JKNet collects the output of all layers and concatenate them together to get the result:

$$\begin{aligned} H^{(0)} &= X \\ H^{(i+1)} &= \sigma(\hat{A}H^{(i)}W^{(i)}) \\ OUT &= CONCAT([H^{(0)}, \dots, H^{(L)}]) \end{aligned}$$

```
import torch
from cogdl.layers import GCNLayer
from cogdl.models import BaseModel

class JKNet(BaseModel):
    def __init__(self, in_feats, out_feats, hidden_size, num_layers):
        super(JKNet, self).__init__()
        shapes = [in_feats] + [hidden_size] * num_layers
        self.layers = nn.ModuleList([
            GCNLayer(shape[i], shape[i+1])
            for i in range(num_layers)
        ])
        self.fc = nn.Linear(hidden_size * num_layers, out_feats)

    def forward(self, graph):
        # symmetric normalization of adjacency matrix
        graph.sym_norm()
        h = graph.x
        out = []
        for layer in self.layers:
            h = layer(x)
            out.append(h)
```

(continues on next page)

(continued from previous page)

```
out = torch.cat(out, dim=1)
return self.fc(out)
```

2.5.2 Define your GNN Module

In most cases, you may build a layer module with new message propagation and aggragation scheme. Here the code snippet shows how to implement a GCNLayer using Graph and efficient sparse matrix operators in CogDL.

```
import torch
from cogdl.utils import spmm

class GCNLayer(torch.nn.Module):
    """
    Args:
        in_feats: int
            Input feature size
        out_feats: int
            Output feature size
    """
    def __init__(self, in_feats, out_feats):
        super(GCNLayer, self).__init__()
        self.fc = torch.nn.Linear(in_feats, out_feats)

    def forward(self, graph, x):
        h = self.fc(x)
        h = spmm(graph, h)
        return h
```

`spmm` is sparse matrix multiplication operation frequently used in GNNs.

$$H = AH = \text{spmm}(A, H)$$

Sparse matrix is stored in `Graph` and will be called automatically. Message-passing in spatial space is equivalent to matrix operations. CogDL also supports other efficient operators like `edge_softmax` and `multi_head_spmm`, you can refer to this [page](#) for usage.

2.5.3 Use Custom models with CogDL

Now that you have defined your own GNN, you can use dataset/task in CogDL to immediately train and evaluate the performance of your model.

```
data = dataset.data
# Use the JKNet model as defined above
model = JKNet(data.num_features, data.num_classes, 32, 4)
experiment(model=model, dataset="cora", mw="node_classification_mw", dw="node_classification_dw")
```

2.6 Using customized Dataset

CogDL has provided lots of common datasets. But you may wish to apply GNN to new datasets for different applications. CogDL provides an interface for customized datasets. You take care of reading in the dataset and the rest is to CogDL

We provide `NodeDataset` and `GraphDataset` as abstract classes and implement necessary basic operations.

2.6.1 Dataset for node_classification

To create a dataset for node_classification, you need to inherit `NodeDataset`. `NodeDataset` is for node-level prediction. Then you need to implement `process` method. In this method, you are expected to read in your data and preprocess raw data to the format available to CogDL with `Graph`. Afterwards, we suggest you to save the processed data (we will also help you do it as you return the data) to avoid doing the preprocessing again. Next time you run the code, CogDL will directly load it.

The running process of the module is as follows:

1. Specify the path to save processed data with `self.path`
2. Function `process` is called to load and preprocess data and your data is saved as `Graph` in `self.path`. This step will be implemented the first time you use your dataset. And then every time you use your dataset, the dataset will be loaded from `self.path` for convenience.
3. For dataset, for example, named `MyNodeDataset` in node-level tasks, You can access the data/`Graph` via `MyNodeDataset.data` or `MyDataset[0]`.

In addition, evaluation metric for your dataset should be specified. CogDL provides `accuracy` and `multiclass_f1` for multi-class classification, `multilabel_f1` for multi-label classification.

If `scale_feat` is set to be `True`, CogDL will normalize node features with mean u and variance s :

$$z = (x - u)/s$$

Here is an example:

```
from cogdl.data import Graph
from cogdl.datasets import NodeDataset, generate_random_graph

class MyNodeDataset(NodeDataset):
    def __init__(self, path="data.pt"):
        self.path = path
        super(MyNodeDataset, self).__init__(path, scale_feat=False, metric="accuracy")

    def process(self):
        """You need to load your dataset and transform to `Graph`"""
        num_nodes, num_edges, feat_dim = 100, 300, 30

        # load or generate your dataset
        edge_index = torch.randint(0, num_nodes, (2, num_edges))
        x = torch.randn(num_nodes, feat_dim)
        y = torch.randint(0, 2, (num_nodes,))

        # set train/val/test mask in node_classification task
        train_mask = torch.zeros(num_nodes).bool()
        train_mask[0 : int(0.3 * num_nodes)] = True
        val_mask = torch.zeros(num_nodes).bool()
```

(continues on next page)

(continued from previous page)

```

val_mask[int(0.3 * num_nodes) : int(0.7 * num_nodes)] = True
test_mask = torch.zeros(num_nodes).bool()
test_mask[int(0.7 * num_nodes) :] = True
data = Graph(x=x, edge_index=edge_index, y=y, train_mask=train_mask, val_
mask=val_mask, test_mask=test_mask)
return data

if __name__ == "__main__":
    # Train customized dataset via defining a new class
    dataset = MyNodeDataset()
    experiment(dataset=dataset, model="gcn")

    # Train customized dataset via feeding the graph data to NodeDataset
    data = generate_random_graph(num_nodes=100, num_edges=300, num_feats=30)
    dataset = NodeDataset(data=data)
    experiment(dataset=dataset, model="gcn")

```

2.6.2 Dataset for graph_classification

Similarly, you need to inherit `GraphDataset` when you want to build a dataset for graph-level tasks such as `graph_classification`. The overall implementation is similar while the difference is in process. As `GraphDataset` contains a lot of graphs, you need to transform your data to `Graph` for each graph separately to form a list of `Graph`. An example is shown as follows:

```

from cogdl.data import Graph
from cogdl.datasets import GraphDataset

class MyGraphDataset(GraphDataset):
    def __init__(self, path="data.pt"):
        self.path = path
        super(MyGraphDataset, self).__init__(path, metric="accuracy")

    def process(self):
        # Load and preprocess data
        # Here we randomly generate several graphs for simplicity as an example
        graphs = []
        for i in range(10):
            edges = torch.randint(0, 20, (2, 30))
            label = torch.randint(0, 7, (1,))
            graphs.append(Graph(edge_index=edges, y=label))
        return graphs

if __name__ == "__main__":
    dataset = MyGraphDataset()
    experiment(model="gin", dataset=dataset)

```

2.7 data

```
class cogdl.data.Adjacency(row=None, col=None, row_ptr=None, weight=None, attr=None,
                           num_nodes=None, types=None, **kwargs)
Bases: cogdl.data.data.BaseGraph

add_remaining_self_loops()
clone()
col_norm()
convert_csr()
degrees(node_idx=None)
property device
property edge_index
static from_dict(dictionary)
    Creates a data object from a python dictionary.
generate_normalization(norm='sym')
get_weight(indicator=None)
    If indicator is not None, the normalization will not be implemented
is_symmetric()
property keys
    Returns all names of graph attributes.
normalize_adj(norm='sym')
property num_edges
property num_nodes
padding_self_loops()
random_walk(seeds, length=1, restart_p=0.0)
remove_self_loops()
property row_inptr
row_norm()
property row_ptr_v
set_symmetric(val)
set_weight(weight)
sym_norm()
to_networkx(weighted=True)
to_scipy_csr()

class cogdl.data.Batch(batch=None, **kwargs)
Bases: cogdl.data.data.Graph
```

A plain old python object modeling a batch of graphs as one big (disconnected) graph. With `cogdl.data.Data` being the base class, all its methods can also be used here. In addition, single graphs can be reconstructed via the assignment vector `batch`, which maps each node to its respective graph identifier.

cumsum(key, item)

If `True`, the attribute `key` with content `item` should be added up cumulatively before concatenated together.

Note: This method is for internal use only, and should only be overridden if the batch concatenation process is corrupted for a specific data attribute.

static from_data_list(data_list, class_type=None)

Constructs a batch object from a python list holding `cogdl.data.Data` objects. The assignment vector `batch` is created on the fly. Additionally, creates assignment batch vectors for each key in `follow_batch`.

property num_graphs

Returns the number of graphs in the batch.

class cogdl.data.DataLoader(*args, **kwargs)

Bases: `Generic[torch.utils.data.dataloader.T_co]`

Data loader which merges data objects from a `cogdl.data.dataset` to a mini-batch.

Parameters

- `dataset` (`Dataset`) – The dataset from which to load the data.
- `batch_size` (`int`, *optional*) – How many samples per batch to load. (default: 1)
- `shuffle` (`bool`, *optional*) – If set to `True`, the data will be reshuffled at every epoch (default: `True`)

batch_size: Optional[int]**static collate_fn(batch)**

`dataset: torch.utils.data.dataset.Dataset[torch.utils.data.dataloader.T_co]`

`drop_last: bool`

`get_parameters()`

`num_workers: int`

`pin_memory: bool`

`prefetch_factor: int`

`record_parameters(params)`

`sampler: torch.utils.data.sampler.Sampler`

`timeout: float`

class cogdl.data.Dataset(root, transform=None, pre_transform=None, pre_filter=None)

Bases: `Generic[torch.utils.data.dataset.T_co]`

Dataset base class for creating graph datasets. See [here](#) for the accompanying tutorial.

Parameters

- `root` (`string`) – Root directory where the dataset should be saved.
- `transform` (`callable`, *optional*) – A function/transform that takes in an `cogdl.data`. Data object and returns a transformed version. The data object will be transformed before every access. (default: `None`)
- `pre_transform` (`callable`, *optional*) – A function/transform that takes in an `cogdl`. `data`. Data object and returns a transformed version. The data object will be transformed before being saved to disk. (default: `None`)

- **pre_filter**(*callable, optional*) – A function that takes in an `cogdl.data.Data` object and returns a boolean value, indicating whether the data object should be included in the final dataset. (default: `None`)

static add_args(*parser*)

Add dataset-specific arguments to the parser.

download()

Downloads the dataset to the `self.raw_dir` folder.

property edge_attr_size

get(*idx*)

Gets the data object at index `idx`.

get_evaluator()

get_loss_fn()

property max_degree

property max_graph_size

property num_classes

The number of classes in the dataset.

property num_features

Returns the number of features per node in the graph.

property num_graphs

process()

Processes the dataset to the `self.processed_dir` folder.

property processed_file_names

The name of the files to find in the `self.processed_dir` folder in order to skip the processing.

property processed_paths

The filepaths to find in the `self.processed_dir` folder in order to skip the processing.

property raw_file_names

The name of the files to find in the `self.raw_dir` folder in order to skip the download.

property raw_paths

The filepaths to find in order to skip the download.

class cogdl.data.Graph(*x=None, y=None, **kwargs*)

Bases: `cogdl.data.data.BaseGraph`

add_remaining_self_loops()

clone()

property col_indices

col_norm()

csr_subgraph(*node_idx, keep_order=False*)

degrees()

property device

property edge_attr

property edge_index

```
edge_subgraph(edge_idx, require_idx=True)
property edge_types
property edge_weight
    Return actual edge_weight
eval()
static from_dict(dictionary)
    Creates a data object from a python dictionary.
static from_pyg_data(data)
property in_norm
is_inductive()
is_symmetric()
property keys
    Returns all names of graph attributes.
local_graph()
mask2nid(split)
nodes()
normalize(key='sym')
property num_classes
property num_edges
    Returns the number of edges in the graph.
property num_features
    Returns the number of features per node in the graph.
property num_nodes
property out_norm
padding_self_loops()
random_walk(seeds, max_nodes_per_seed, restart_p=0.0)
random_walk_with_restart(seeds, max_nodes_per_seed, restart_p=0.0)
property raw_edge_weight
    Return edge_weight without __in_norm__ and __out_norm__, only used for SpMM
remove_self_loops()
restore(key)
property row_indptr
row_norm()
sample_adj(batch, size=-1, replace=True)
set_asymmetric()
set_symmetric()
store(key)
subgraph(node_idx, keep_order=False)
```

```
sym_norm()
property test_nid
to_networkx()
to_scipy_csr()
train()
property train_nid
property val_nid

class cogdl.data.MultiGraphDataset(root=None, transform=None, pre_transform=None, pre_filter=None)
Bases: Generic[torch.utils.data.dataset.T_co]

get(idx)
    Gets the data object at index idx.

len()
property max_degree
property max_graph_size
property num_classes
    The number of classes in the dataset.
property num_features
    Returns the number of features per node in the graph.
property num_graphs

cogdl.data.batch_graphs(graphs)
```

2.8 datasets

2.8.1 GATNE dataset

```
class cogdl.datasets.gatne.AmazonDataset(data_path='data')
Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.gatne.GatneDataset(root, name)
Bases: Generic[torch.utils.data.dataset.T_co]

The network datasets “Amazon”, “Twitter” and “YouTube” from the “Representation Learning for Attributed Multiplex Heterogeneous Network” paper.
```

Parameters

- **root** (*string*) – Root directory where the dataset should be saved.
- **name** (*string*) – The name of the dataset (“Amazon”, “Twitter”, “YouTube”).

```
download()
Downloads the dataset to the self.raw_dir folder.
```

```
get(idx)
Gets the data object at index idx.
```

```
process()
Processes the dataset to the self.processed_dir folder.
```

```

property processed_file_names
    The name of the files to find in the self.processed_dir folder in order to skip the processing.

property raw_file_names
    The name of the files to find in the self.raw_dir folder in order to skip the download.

url = 'https://github.com/THUDM/GATNE/raw/master/data'

class cogdl.datasets.gatne.TwitterDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.gatne.YouTubeDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

cogdl.datasets.gatne.read_gatne_data(folder)

```

2.8.2 GCC dataset

```

class cogdl.datasets.gcc_data.EdgeList(root, name)
    Bases: Generic[torch.utils.data.dataset.T_co]

download()
    Downloads the dataset to the self.raw_dir folder.

get(idx)
    Gets the data object at index idx.

property num_classes
    The number of classes in the dataset.

process()
    Processes the dataset to the self.processed_dir folder.

property processed_file_names
    The name of the files to find in the self.processed_dir folder in order to skip the processing.

property raw_file_names
    The name of the files to find in the self.raw_dir folder in order to skip the download.

url = 'https://github.com/cenyk1230/gcc-data/raw/master'

class cogdl.datasets.gcc_data.GCCDataset(root, name)
    Bases: Generic[torch.utils.data.dataset.T_co]

download()
    Downloads the dataset to the self.raw_dir folder.

get(idx)
    Gets the data object at index idx.

preprocess(root, name)

property processed_file_names
    The name of the files to find in the self.processed_dir folder in order to skip the processing.

property raw_file_names
    The name of the files to find in the self.raw_dir folder in order to skip the download.

url = 'https://github.com/cenyk1230/gcc-data/raw/master'

class cogdl.datasets.gcc_data.KDD_ICDM_GCCDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

```

```
class cogdl.datasets.gcc_data.SIGIR_CIKM_GCCDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.gcc_data.SIGMOD_ICDE_GCCDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.gcc_data.USAAirportDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]
```

2.8.3 GTN dataset

```
class cogdl.datasets.gtn_data.ACMLTNDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.gtn_data.DBLP_LTNDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.gtn_data.GTNDataset(root, name)
    Bases: Generic[torch.utils.data.dataset.T_co]
```

The network datasets “ACM”, “DBLP” and “IMDB” from the “Graph Transformer Networks” paper.

Parameters

- **root** (*string*) – Root directory where the dataset should be saved.
- **name** (*string*) – The name of the dataset ("gtn-acm", "gtn-dblp", "gtn-imdb").

apply_to_device(*device*)

download()

Downloads the dataset to the `self.raw_dir` folder.

get(*idx*)

Gets the data object at index `idx`.

property num_classes

The number of classes in the dataset.

process()

Processes the dataset to the `self.processed_dir` folder.

property processed_file_names

The name of the files to find in the `self.processed_dir` folder in order to skip the processing.

property raw_file_names

The name of the files to find in the `self.raw_dir` folder in order to skip the download.

read_gtn_data(*folder*)

```
class cogdl.datasets.gtn_data.IMDB_LTNDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]
```

2.8.4 HAN dataset

```
class cogdl.datasets.han_data.ACM_HANDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.han_data.DBLP_HANDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.han_data.HANDataset(root, name)
    Bases: Generic[torch.utils.data.dataset.T_co]
```

The network datasets “ACM”, “DBLP” and “IMDB” from the “Heterogeneous Graph Attention Network” paper.

Parameters

- **root** (*string*) – Root directory where the dataset should be saved.
- **name** (*string*) – The name of the dataset ("han-acm", "han-dblp", "han-imdb").

apply_to_device(*device*)

download()

Downloads the dataset to the `self.raw_dir` folder.

get(*idx*)

Gets the data object at index *idx*.

property num_classes

The number of classes in the dataset.

process()

Processes the dataset to the `self.processed_dir` folder.

property processed_file_names

The name of the files to find in the `self.processed_dir` folder in order to skip the processing.

property raw_file_names

The name of the files to find in the `self.raw_dir` folder in order to skip the download.

read_gtn_data(*folder*)

```
class cogdl.datasets.han_data.IMDB_HANDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]
```

cogdl.datasets.han_data.**sample_mask**(*idx, length*)

Create mask.

2.8.5 KG dataset

```
class cogdl.datasets.kg_data.FB13Dataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]
```

```
class cogdl.datasets.kg_data.FB13SDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]
```

```
class cogdl.datasets.kg_data.FB15k237Dataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]
```

```
class cogdl.datasets.kg_data.FB15kDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]
```

```
class cogdl.datasets.kg_data.KnowledgeGraphDataset(root, name)
    Bases: Generic[torch.utils.data.dataset.T_co]
```

```
download()
    Downloads the dataset to the self.raw_dir folder.

get(idx)
    Gets the data object at index idx.

property num_entities
property num_relations

process()
    Processes the dataset to the self.processed_dir folder.

property processed_file_names
    The name of the files to find in the self.processed_dir folder in order to skip the processing.

property raw_file_names
    The name of the files to find in the self.raw_dir folder in order to skip the download.

property test_start_idx
property train_start_idx

url =
'https://cloud.tsinghua.edu.cn/d/b567292338f2488699b7/files/?p=%2F{}%2F{}&dl=1'

property valid_start_idx

class cogdl.datasets.kg_data.WN18Dataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.kg_data.WN18RRDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

cogdl.datasets.kg_data.read_triplet_data(folder)
```

2.8.6 Matlab matrix dataset

```
class cogdl.datasets.matlab_matrix.BlogcatalogDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.matlab_matrix.DblpNEDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.matlab_matrix.FlickrDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.matlab_matrix.MatlabMatrix(root, name, url)
    Bases: Generic[torch.utils.data.dataset.T_co]

networks from the http://leitang.net/code/social-dimension/data/ or http://snap.stanford.edu/node2vec/
```

Parameters

- **root** (*string*) – Root directory where the dataset should be saved.
- **name** (*string*) – The name of the dataset ("Blogcatalog").

```
download()
    Downloads the dataset to the self.raw_dir folder.

get(idx)
    Gets the data object at index idx.
```

```

property num_classes
    The number of classes in the dataset.

property num_nodes

process()
    Processes the dataset to the self.processed_dir folder.

property processed_file_names
    The name of the files to find in the self.processed_dir folder in order to skip the processing.

property raw_file_names
    The name of the files to find in the self.raw_dir folder in order to skip the download.

class cogdl.datasets.matlab_matrix.NetworkEmbeddingCMTYDataset(root, name, url)
Bases: Generic[torch.utils.data.dataset.T_co]

download()
    Downloads the dataset to the self.raw_dir folder.

get(idx)
    Gets the data object at index idx.

property num_classes
    The number of classes in the dataset.

property num_nodes

process()
    Processes the dataset to the self.processed_dir folder.

property processed_file_names
    The name of the files to find in the self.processed_dir folder in order to skip the processing.

property raw_file_names
    The name of the files to find in the self.raw_dir folder in order to skip the download.

class cogdl.datasets.matlab_matrix.PPIDataset(data_path='data')
Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.matlab_matrix.WikipediaDataset(data_path='data')
Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.matlab_matrix.YoutubeNEDataset(data_path='data')
Bases: Generic[torch.utils.data.dataset.T_co]

```

2.8.7 OGB dataset

```

class cogdl.datasets.ogb.0GBArxivDataset(data_path='data')
Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.ogb.0GBCodeDataset(data_path='data')
Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.ogb.0GBGDataset(root, name)
Bases: Generic[torch.utils.data.dataset.T_co]

get(idx)
    Gets the data object at index idx.

get_loader(args)

get_subset(subset)

```

```
property num_classes
    The number of classes in the dataset.

class cogdl.datasets.ogb.0GBMolbaceDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.ogb.0GBMolhivDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.ogb.0GBMolpcbaDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.ogb.0GBNDataset(root, name, transform=None)
    Bases: Generic[torch.utils.data.dataset.T_co]

get(idx)
    Gets the data object at index idx.

get_evaluator()
get_loss_fn()

process()
    Processes the dataset to the self.processed_dir folder.

property processed_file_names
    The name of the files to find in the self.processed_dir folder in order to skip the processing.

class cogdl.datasets.ogb.0GBPapers100MDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.ogb.0GBPpaDataset
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.ogb.0GBProductsDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.ogb.0GBProteinsDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

property edge_attr_size
get_evaluator()
get_loss_fn()

process()
    Processes the dataset to the self.processed_dir folder.
```

2.8.8 TU dataset

```
class cogdl.datasets.tu_data.CollabDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.ENYMES(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.ImdbBinaryDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.ImdbMultiDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]
```

```

class cogdl.datasets.tu_data.MUTAGDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.NCI109Dataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.NCI1Dataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.PTCMRDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.ProteinsDataset(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.RedditBinary(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.RedditMulti12K(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.RedditMulti5K(data_path='data')
    Bases: Generic[torch.utils.data.dataset.T_co]

class cogdl.datasets.tu_data.TUDataset(root, name)
    Bases: Generic[torch.utils.data.dataset.T_co]

download()
    Downloads the dataset to the self.raw_dir folder.

property num_classes
    The number of classes in the dataset.

process()
    Processes the dataset to the self.processed_dir folder.

property processed_file_names
    The name of the files to find in the self.processed_dir folder in order to skip the processing.

property raw_file_names
    The name of the files to find in the self.raw_dir folder in order to skip the download.

url = 'https://www.chrsmrrs.com/graphkerneldatasets'

cogdl.datasets.tu_data.cat(seq)
cogdl.datasets.tu_data.coalesce(index, value, m, n)
cogdl.datasets.tu_data.normalize_feature(data)
cogdl.datasets.tu_data.num_edge_attributes(edge_attr=None)
cogdl.datasets.tu_data.num_edge_labels(edge_attr=None)
cogdl.datasets.tu_data.num_node_attributes(x=None)
cogdl.datasets.tu_data.num_node_labels(x=None)
cogdl.datasets.tu_data.parse_txt_array(src, sep=None, start=0, end=None, dtype=None, device=None)
cogdl.datasets.tu_data.read_file(folder, prefix, name, dtype=None)
cogdl.datasets.tu_data.read_tu_data(folder, prefix)
cogdl.datasets.tu_data.read_txt_array(path, sep=None, start=0, end=None, dtype=None, device=None)
cogdl.datasets.tu_data.segment(src, indptr)

```

2.8.9 Module contents

```
cogdl.datasets.build_dataset(args)
cogdl.datasets.build_dataset_from_name(dataset, split=0)
cogdl.datasets.build_dataset_from_path(data_path, dataset=None)
cogdl.datasets.register_dataset(name)
```

New dataset types can be added to cogdl with the `register_dataset()` function decorator.

For example:

```
@register_dataset('my_dataset')
class MyDataset():
    (...)
```

Parameters `name (str)` – the name of the dataset

```
cogdl.datasets.try_adding_dataset_args(dataset, parser)
```

2.9 models

2.9.1 BaseModel

```
class cogdl.models.base_model.BaseModel
    Bases: torch.nn.modules.module.Module

    static add_args(parser)
        Add model-specific arguments to the parser.

    classmethod build_model_from_args(args)
        Build a new model instance.

    property device
    forward(*args)
        Defines the computation performed at every call.
        Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
predict(data)
set_loss_fn(loss_fn)
training: bool
```

2.9.2 Embedding Model

```
class cogdl.models.emb.hope.HOPE(dimension, beta)
    Bases: cogdl.models.base_model.BaseModel
```

The HOPE model from the “Grarep: Asymmetric transitivity preserving graph embedding” paper.

Parameters

- **hidden_size** (*int*) – The dimension of node representation.
- **beta** (*float*) – Parameter in katz decomposition.

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
```

```
forward(graph, return_dict=False)
```

The author claim that Katz has superior performance in related tasks $S_{\text{katz}} = (M_g)^{-1} * M_l = (I - \beta^* A)^{-1} * \beta^* A = (I - \beta^* A)^{-1} * (I - (I - \beta^* A)) = (I - \beta^* A)^{-1} - I$

```
training: bool
```

```
class cogdl.models.emb.spectral.Spectral(hidden_size)
```

```
    Bases: cogdl.models.base_model.BaseModel
```

The Spectral clustering model from the “Leveraging social media networks for classification” paper

Parameters **hidden_size** (*int*) – The dimension of node representation.

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
```

```
forward(graph, return_dict=False)
```

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool
```

```
class cogdl.models.emb.hin2vec.Hin2vec(hidden_dim, walk_length, walk_num, batch_size, hop, negative, epochs, lr, cpu=True)
```

```
    Bases: cogdl.models.base_model.BaseModel
```

The Hin2vec model from the “HIN2Vec: Explore Meta-paths in Heterogeneous Information Networks for Representation Learning” paper.

Parameters

- **hidden_size** (*int*) – The dimension of node representation.
- **walk_length** (*int*) – The walk length.
- **walk_num** (*int*) – The number of walks to sample for each node.
- **batch_size** (*int*) – The batch size of training in Hin2vec.

- **hop** (*int*) – The number of hop to construct training samples in Hin2vec.
- **negative** (*int*) – The number of negative samples for each meta2path pair.
- **epochs** (*int*) – The number of training iteration.
- **lr** (*float*) – The initial learning rate of SGD.
- **cpu** (*bool*) – Use CPU or GPU to train hin2vec.

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(data)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

class cogdl.models.emb.netmf.NetMF(dimension, window_size, rank, negative, is_large=False)
Bases: `cogdl.models.base_model.BaseModel`

The NetMF model from the “Network Embedding as Matrix Factorization: Unifying DeepWalk, LINE, PTE, and node2vec” paper.

Parameters

- **hidden_size** (*int*) – The dimension of node representation.
- **window_size** (*int*) – The actual context size which is considered in language model.
- **rank** (*int*) – The rank in approximate normalized laplacian.
- **negative** (*int*) – The number of negative samples in negative sampling.
- **is-large** (*bool*) – When window size is large, use approximated deepwalk matrix to decompose.

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(graph, return_dict=False)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

```
class cogdl.models.emb.deepwalk.DeepWalk(dimension, walk_length, walk_num, window_size, worker,
                                             iteration)
Bases: cogdl.models.base_model.BaseModel
```

The DeepWalk model from the “DeepWalk: Online Learning of Social Representations” paper

Parameters

- **hidden_size** (*int*) – The dimension of node representation.
- **walk_length** (*int*) – The walk length.
- **walk_num** (*int*) – The number of walks to sample for each node.
- **window_size** (*int*) – The actual context size which is considered in language model.
- **worker** (*int*) – The number of workers for word2vec.
- **iteration** (*int*) – The number of training iteration in word2vec.

```
static add_args(parser: argparse.ArgumentParser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args) → cogdl.models.emb.deepwalk.DeepWalk
```

```
forward(graph, embedding_model_creator=<class 'gensim.models.word2vec.Word2Vec'>,
        return_dict=False)
```

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool
```

```
class cogdl.models.emb.gatne.GATNE(dimension, walk_length, walk_num, window_size, worker, epochs,
                                         batch_size, edge_dim, att_dim, negative_samples, neighbor_samples,
                                         schema)
```

Bases: *cogdl.models.base_model.BaseModel*

The GATNE model from the “Representation Learning for Attributed Multiplex Heterogeneous Network” paper

Parameters

- **walk_length** (*int*) – The walk length.
- **walk_num** (*int*) – The number of walks to sample for each node.
- **window_size** (*int*) – The actual context size which is considered in language model.
- **worker** (*int*) – The number of workers for word2vec.
- **epochs** (*int*) – The number of training epochs.
- **batch_size** (*int*) – The size of each training batch.
- **edge_dim** (*int*) – Number of edge embedding dimensions.
- **att_dim** (*int*) – Number of attention dimensions.
- **negative_samples** (*int*) – Negative samples for optimization.
- **neighbor_samples** (*int*) – Neighbor samples for aggregation

- **schema** (*str*) – The metapath schema used in model. Metapaths are splited with “,”,
- **example** (*while each node type are connected with “-” in each metapath. For*) – “0-1-0,0-1-2-1-0”

```
static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)
    forward(network_data)
        Defines the computation performed at every call.
        Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: *bool*

```
class cogdl.models.emb.dgk.DeepGraphKernel(hidden_dim, min_count, window_size, sampling_rate,
                                             rounds, epochs, alpha, n_workers=4)
Bases: cogdl.models.base_model.BaseModel
```

The Hin2vec model from the “Deep Graph Kernels” paper.

Parameters

- **hidden_size** (*int*) – The dimension of node representation.
- **min_count** (*int*) – Parameter in word2vec.
- **window** (*int*) – The actual context size which is considered in language model.
- **sampling_rate** (*float*) – Parameter in word2vec.
- **iteration** (*int*) – The number of iteration in WL method.
- **epochs** (*int*) – The number of training iteration.
- **alpha** (*float*) – The learning rate of word2vec.

```
static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

static feature_extractor(data, rounds, name)

forward(graphs, **kwargs)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

save_embedding (*output_path*)

training: *bool*

```
static wl_iterations(graph, features, rounds)
class cogdl.models.emb.grarep.GraRep(dimension, step)
Bases: cogdl.models.base_model.BaseModel
```

The GraRep model from the “GraRep: Learning graph representations with global structural information” paper.

Parameters

- **hidden_size** (`int`) – The dimension of node representation.
- **step** (`int`) – The maximum order of transition probability.

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
```

```
forward(graph, return_dict=False)
```

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool
```

```
class cogdl.models.emb.dngr.DNGR(hidden_size1, hidden_size2, noise, alpha, step, epochs, lr, cpu)
Bases: cogdl.models.base_model.BaseModel
```

The DNGR model from the “Deep Neural Networks for Learning Graph Representations” paper

Parameters

- **hidden_size1** (`int`) – The size of the first hidden layer.
- **hidden_size2** (`int`) – The size of the second hidden layer.
- **noise** (`float`) – Denoise rate of DAE.
- **alpha** (`float`) – Parameter in DNGR.
- **step** (`int`) – The max step in random surfing.
- **epochs** (`int`) – The max epochs in training step.
- **lr** (`float`) – Learning rate in DNGR.

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
```

```
forward(graph, return_dict=False)
```

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
get_denoised_matrix(mat)
get_emb(matrix)
get_ppmi_matrix(mat)
random_surfing(adj_matrix)
scale_matrix(mat)
training: bool

class cogdl.models.emb.pronepp.ProNEPP(filter_types, svd, search, max_evals=None, loss_type=None,
                                         n_workers=None)
Bases: cogdl.models.base_model.BaseModel

static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)
training: bool

class cogdl.models.emb.graph2vec.Graph2Vec(dimension, min_count, window_size, dm, sampling_rate,
                                             rounds, epochs, lr, worker=4)
Bases: cogdl.models.base_model.BaseModel

The Graph2Vec model from the “graph2vec: Learning Distributed Representations of Graphs” paper
```

Parameters

- **hidden_size** (`int`) – The dimension of node representation.
- **min_count** (`int`) – Parameter in doc2vec.
- **window_size** (`int`) – The actual context size which is considered in language model.
- **sampling_rate** (`float`) – Parameter in doc2vec.
- **dm** (`int`) – Parameter in doc2vec.
- **iteration** (`int`) – The number of iteration in WL method.
- **lr** (`float`) – Learning rate in doc2vec.

```
static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

static feature_extractor(data, rounds, name)
forward(graphs, **kwargs)
    Defines the computation performed at every call.

    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
save_embedding(output_path)
training: bool

static wl_iterations(graph, features, rounds)
```

```
class cogdl.models.emb.metapath2vec.Metapath2vec(dimension, walk_length, walk_num, window_size,
worker, iteration, schema)
```

Bases: `cogdl.models.base_model.BaseModel`

The Metapath2vec model from the “metapath2vec: Scalable Representation Learning for Heterogeneous Networks” paper

Parameters

- **hidden_size** (`int`) – The dimension of node representation.
- **walk_length** (`int`) – The walk length.
- **walk_num** (`int`) – The number of walks to sample for each node.
- **window_size** (`int`) – The actual context size which is considered in language model.
- **worker** (`int`) – The number of workers for word2vec.
- **iteration** (`int`) – The number of training iteration in word2vec.
- **schema** (`str`) – The metapath schema used in model. Metapaths are split with “,”,
- **example** (`while each node type are connected with “-” in each metapath.`
`For`) – “0-1-0,0-2-0,1-0-2-0-1”.

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(data)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

```
class cogdl.models.emb.node2vec.Node2vec(dimension, walk_length, walk_num, window_size, worker,
iteration, p, q)
```

Bases: `cogdl.models.base_model.BaseModel`

The node2vec model from the “node2vec: Scalable feature learning for networks” paper

Parameters

- **hidden_size** (`int`) – The dimension of node representation.
- **walk_length** (`int`) – The walk length.
- **walk_num** (`int`) – The number of walks to sample for each node.
- **window_size** (`int`) – The actual context size which is considered in language model.
- **worker** (`int`) – The number of workers for word2vec.
- **iteration** (`int`) – The number of training iteration in word2vec.
- **p** (`float`) – Parameter in node2vec.
- **q** (`float`) – Parameter in node2vec.

```
static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(graph, return_dict=False)
    Defines the computation performed at every call.

    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.models.emb.PTE(dimension, walk_length, walk_num, negative, batch_size, alpha)
Bases: cogdl.models.base_model.BaseModel

The PTE model from the “PTE: Predictive Text Embedding through Large-scale Heterogeneous Text Networks” paper.
```

Parameters

- **hidden_size** (`int`) – The dimension of node representation.
- **walk_length** (`int`) – The walk length.
- **walk_num** (`int`) – The number of walks to sample for each node.
- **negative** (`int`) – The number of nagative samples for each edge.
- **batch_size** (`int`) – The batch size of training in PTE.
- **alpha** (`float`) – The initial learning rate of SGD.

```
static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(data)
    Defines the computation performed at every call.

    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.models.emb.netsmf.NetSMF(dimension, window_size, negative, num_round, worker)
Bases: cogdl.models.base_model.BaseModel

The NetSMF model from the “NetSMF: Large-Scale Network Embedding as Sparse Matrix Factorization” paper.

Parameters
    • hidden_size (int) – The dimension of node representation.

    • window_size (int) – The actual context size which is considered in language model.
```

- **negative** (`int`) – The number of negative samples in negative sampling.
- **num_round** (`int`) – The number of round in NetSMF.
- **worker** (`int`) – The number of workers for NetSMF.

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(graph, return_dict=False)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

class cogdl.models.emb.line.LINE(dimension, walk_length, walk_num, negative, batch_size, alpha, order)
Bases: `cogdl.models.base_model.BaseModel`

The LINE model from the “Line: Large-scale information network embedding” paper.

Parameters

- **hidden_size** (`int`) – The dimension of node representation.
- **walk_length** (`int`) – The walk length.
- **walk_num** (`int`) – The number of walks to sample for each node.
- **negative** (`int`) – The number of negative samples for each edge.
- **batch_size** (`int`) – The batch size of training in LINE.
- **alpha** (`float`) – The initial learning rate of SGD.
- **order** (`int`) – 1 represents preserving 1-st order proximity, 2 represents 2-nd,
- **them** (`while 3 means both of`) –

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(graph, return_dict=False)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

```
class cogdl.models.emb.sdne.SDNE(hidden_size1, hidden_size2, dropout, alpha, beta, nu1, nu2, epochs, lr,
                                    cpu)
```

Bases: `cogdl.models.base_model.BaseModel`

The SDNE model from the “Structural Deep Network Embedding” paper

Parameters

- `hidden_size1` (`int`) – The size of the first hidden layer.
- `hidden_size2` (`int`) – The size of the second hidden layer.
- `dropout` (`float`) – Dropout rate.
- `alpha` (`float`) – Trade-off parameter between 1-st and 2-nd order objective function in SDNE.
- `beta` (`float`) – Parameter of 2-nd order objective function in SDNE.
- `nu1` (`float`) – Parameter of l1 normalization in SDNE.
- `nu2` (`float`) – Parameter of l2 normalization in SDNE.
- `epochs` (`int`) – The max epoches in training step.
- `lr` (`float`) – Learning rate in SDNE.
- `cpu` (`bool`) – Use CPU or GPU to train hin2vec.

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
```

```
forward(graph, return_dict=False)
```

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool
```

```
class cogdl.models.emb.prone.ProNE(dimension, step, mu, theta)
```

Bases: `cogdl.models.base_model.BaseModel`

The ProNE model from the “ProNE: Fast and Scalable Network Representation Learning” paper.

Parameters

- `hidden_size` (`int`) – The dimension of node representation.
- `step` (`int`) – The number of items in the chebyshev expansion.
- `mu` (`float`) – Parameter in ProNE.
- `theta` (`float`) – Parameter in ProNE.

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
```

forward(*graph*: cogdl.data.data.Graph, *return_dict*=False)
 Defines the computation performed at every call.
 Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

2.9.3 GNN Model

```
class cogdl.models.nn.DGIModel(in_feats, hidden_size, activation)
Bases: cogdl.models.base_model.BaseModel

static add_args(parser)
Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

embed(data)

forward(graph)
Defines the computation performed at every call.

Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

```
class cogdl.models.nn.MVGRL(in_feats, hidden_size, sample_size=2000, batch_size=4, alpha=0.2,
                             dataset='cora')
Bases: cogdl.models.base_model.BaseModel

static add_args(parser)
Add model-specific arguments to the parser.

augment(graph)

classmethod build_model_from_args(args)

embed(data, msk=None)

forward(graph)
Defines the computation performed at every call.

Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
loss(data)
preprocess(graph)
training: bool

class cogdl.models.nn.patchy_san.PatchySAN(num_features, num_classes, num_sample, num_neighbor,
                                             iteration)
Bases: cogdl.models.base_model.BaseModel
```

The Patchy-SAN model from the “Learning Convolutional Neural Networks for Graphs” paper.

Parameters

- **batch_size** (`int`) – The batch size of training.
- **sample** (`int`) – Number of chosen vertexes.
- **stride** (`int`) – Node selection stride.
- **neighbor** (`int`) – The number of neighbor for each node.
- **iteration** (`int`) – The number of training iteration.

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
build_model(num_channel, num_sample, num_neighbor, num_class)
```

```
classmethod build_model_from_args(args)
```

```
forward(batch)
```

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
classmethod split_dataset(dataset, args)
```

```
training: bool
```

```
class cogdl.models.nn.gcn.GCN(in_feats, hidden_size, out_feats, num_layers, dropout, activation='relu',
                               residual=False, norm=None)
```

Bases: `cogdl.models.base_model.BaseModel`

The GCN model from the “Semi-Supervised Classification with Graph Convolutional Networks” paper

Parameters

- **in_features** (`int`) – Number of input features.
- **out_features** (`int`) – Number of classes.
- **hidden_size** (`int`) – The dimension of node representation.
- **dropout** (`float`) – Dropout rate for model training.

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
```

```
embed(graph)
```

forward(*graph*)
Defines the computation performed at every call.
Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

class cogdl.models.nn.gdc_gcn.**GDC_GCN**(*nfeat*, *nhid*, *nclass*, *dropout*, *alpha*, *t*, *k*, *eps*, *gdctype*)
Bases: *cogdl.models.base_model.BaseModel*

The GDC model from the “Diffusion Improves Graph Learning” paper, with the PPR and heat matrix variants combined with GCN

Parameters

- **num_features** (*int*) – Number of input features in ppr-preprocessed dataset.
- **num_classes** (*int*) – Number of classes.
- **hidden_size** (*int*) – The dimension of node representation.
- **dropout** (*float*) – Dropout rate for model training.
- **alpha** (*float*) – PPR polynomial filter param, 0 to 1.
- **t** (*float*) – Heat polynomial filter param
- **k** (*int*) – Top k nodes retained during sparsification.
- **eps** (*float*) – Threshold for clipping.
- **gdc_type** (*str*) – “none”, “ppr”, “heat”

static add_args(*parser*)

Add model-specific arguments to the parser.

classmethod build_model_from_args(*args*)

forward(*graph*)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

predict(*data=None*)

preprocessing(*data*, *gdc_type='ppr'*)

reset_data(*data*)

training: bool

class cogdl.models.nn.graphsage.**Graphsage**(*num_features*, *num_classes*, *hidden_size*, *num_layers*,
sample_size, *dropout*, *aggr*)

Bases: *cogdl.models.base_model.BaseModel*

```
static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(*args)
    Defines the computation performed at every call.

    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
inference(x_all, data_loader)

mini_forward(graph)

sampling(edge_index, num_sample)

training: bool

class cogdl.models.nn.compgcn.LinkPredictCompGCN(num_entities, num_rels, hidden_size, num_bases=0,
                                                 layers=1, sampling_rate=0.01, penalty=0.001,
                                                 dropout=0.0, lbl_smooth=0.1, opn='sub')
Bases: cogdl.utils.link_prediction_utils.GNNLinkPredict, cogdl.models.base_model.
 BaseModel

static add_args(parser)
    Add model-specific arguments to the parser.

add_reverse_edges(edge_index, edge_types)

classmethod build_model_from_args(args)

forward(graph)
    Defines the computation performed at every call.

    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
loss(data: cogdl.data.data.Graph, scoring)

predict(graph)

training: bool

class cogdl.models.nn.drgcn.DrGCN(num_features, num_classes, hidden_size, num_layers, dropout,
                                    norm=None, activation='relu')
Bases: cogdl.models.base_model.BaseModel

static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)
```

forward(graph)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

predict(graph)**training:** bool

```
class cogdl.models.nn.graph_unet.GraphUNet(in_feats: int, hidden_size: int, out_feats: int, pooling_layer: int, pooling_rates: List[float], n_dropout: float = 0.5, adj_dropout: float = 0.3, activation: str = 'elu', improved: bool = False, aug_adj: bool = False)
```

Bases: *cogdl.models.base_model.BaseModel*

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)**forward**(graph: cogdl.data.data.Graph) → torch.Tensor

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

```
class cogdl.models.nn.gcnmix.GCNMix(in_feat, hidden_size, num_classes, k, temperature, alpha, dropout)
```

Bases: *cogdl.models.base_model.BaseModel*

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)**forward**(graph)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

forward_aux(*x, label, train_index, mix_hidden=True, layer_mix=1*)**predict_noise**(*data, tau=1*)**training:** bool

```
class cogdl.models.nn.diffpool.DiffPool(in_feats, hidden_dim, embed_dim, num_classes, num_layers,
                                         num_pool_layers, assign_dim, pooling_ratio, batch_size,
                                         dropout=0.5, no_link_pred=True, concat=False, use_bn=False)
```

Bases: `cogdl.models.base_model.BaseModel`

DIFFPOOL from paper [Hierarchical Graph Representation Learning with Differentiable Pooling](#).

Parameters

- `in_feats` (`int`) – Size of each input sample.
- `hidden_dim` (`int`) – Size of hidden layer dimension of GNN.
- `embed_dim` (`int`) – Size of embedded node feature, output size of GNN.
- `num_classes` (`int`) – Number of target classes.
- `num_layers` (`int`) – Number of GNN layers.
- `num_pool_layers` (`int`) – Number of pooling.
- `assign_dim` (`int`) – Embedding size after the first pooling.
- `pooling_ratio` (`float`) – Size of each pooling ratio.
- `batch_size` (`int`) – Size of each mini-batch.
- `dropout` (`float`, `optional`) – Size of dropout, default: `0.5`.
- `no_link_pred` (`bool`, `optional`) – If True, use link prediction loss, default: `True`.

static add_args(parser)

Add model-specific arguments to the parser.

after_pooling_forward(gnn_layers, adj, x, concat=False)

classmethod build_model_from_args(args)

forward(batch)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

graph_classification_loss(batch)

reset_parameters()

classmethod split_dataset(dataset, args)

training: bool

```
class cogdl.models.nn.gcnii.GCNII(in_feats, hidden_size, out_feats, num_layers, dropout=0.5, alpha=0.1,
                                    lmbda=1, wd1=0.0, wd2=0.0, residual=False, actnn=False)
```

Bases: `cogdl.models.base_model.BaseModel`

Implementation of GCNII in paper “Simple and Deep Graph Convolutional Networks”.

Parameters

- `in_feats` (`int`) – Size of each input sample
- `hidden_size` (`int`) – Size of each hidden unit

- **out_feats** (*int*) – Size of each out sample
- **num_layers** (*int*) –
- **dropout** (*float*) –
- **alpha** (*float*) – Parameter of initial residual connection
- **lmbda** (*float*) – Parameter of identity mapping
- **wd1** (*float*) – Weight-decay for Fully-connected layers
- **wd2** (*float*) – Weight-decay for convolutional layers

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)**forward(graph)**

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

get_optimizer(args)**predict(graph)****training: bool**

```
class cogdl.models.nn.SignMLP(in_feats, out_feats, hidden_size, num_layers, dropout=0.0, activation='relu',
                               norm=None, act_first=False, bias=True)
```

Bases: *cogdl.models.base_model.BaseModel*

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)**forward(x)**

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

predict(data)**training: bool**

```
class cogdl.models.nn.MixHop(num_features, num_classes, dropout, layer1_pows, layer2_pows)
```

Bases: *cogdl.models.base_model.BaseModel*

static add_args(parser)

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
forward(graph)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
predict(data)
training: bool
class cogdl.models.nn.gat.GAT(in_feats, hidden_size, out_features, num_layers, dropout, attn_drop, alpha,
                               nhead, residual, last_nhead, norm=None)
Bases: cogdl.models.base_model.BaseModel
```

The GAT model from the “Graph Attention Networks” paper

Parameters

- **num_features** (`int`) – Number of input features.
- **num_classes** (`int`) – Number of classes.
- **hidden_size** (`int`) – The dimension of node representation.
- **dropout** (`float`) – Dropout rate for model training.
- **alpha** (`float`) – Coefficient of leaky_relu.
- **nheads** (`int`) – Number of attention heads.

```
static add_args(parser)
    Add model-specific arguments to the parser.
classmethod build_model_from_args(args)
forward(graph)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
predict(graph)
training: bool
class cogdl.models.nn.han.HAN(num_edge, w_in, w_out, num_class, num_nodes, num_layers)
Bases: cogdl.models.base_model.BaseModel
static add_args(parser)
    Add model-specific arguments to the parser.
classmethod build_model_from_args(args)
```

forward(*graph*)
 Defines the computation performed at every call.
 Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: `bool`

```
class cogdl.models.nn.pppnp.PPPNP(nfeat, nhid, nclass, num_layers, dropout, propagation, alpha, niter,
                                    cache=True)
```

Bases: `cogdl.models.base_model.BaseModel`

static add_args(*parser*)
 Add model-specific arguments to the parser.

classmethod build_model_from_args(*args*)

forward(*graph*)
 Defines the computation performed at every call.
 Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

predict(*graph*)
training: `bool`

```
class cogdl.models.nn.grace.GRACE(in_feats: int, hidden_size: int, proj_hidden_size: int, num_layers: int,
                                    drop_feature_rates: List[float], drop_edge_rates: List[float], tau: float
                                    = 0.5, activation: str = 'relu', batch_size: int = -1)
```

Bases: `cogdl.models.base_model.BaseModel`

static add_args(*parser*)
 Add model-specific arguments to the parser.

augment(*graph*)

batched_loss(*z1: torch.Tensor, z2: torch.Tensor, batch_size: int*)

classmethod build_model_from_args(*args*)

contrastive_loss(*z1: torch.Tensor, z2: torch.Tensor*)

drop_adj(*graph: cogdl.data.data.Graph, drop_rate: float = 0.5*)

drop_feature(*x: torch.Tensor, droprate: float*)

embed(*data*)

forward(*graph: cogdl.data.data.Graph, x: Optional[torch.Tensor] = None*)
 Defines the computation performed at every call.
 Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
prop(graph: cogdl.data.data.Graph, x: torch.Tensor, drop_feature_rate: float = 0.0, drop_edge_rate: float = 0.0)

training: bool

class cogdl.models.nn.pprgo.PPRGo(in_feats, hidden_size, out_feats, num_layers, alpha, dropout,
                                     activation='relu', nprop=2, norm='sym')
Bases: cogdl.models.base_model.BaseModel

static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(x, targets, ppr_scores)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
predict(graph, batch_size=10000)
training: bool

class cogdl.models.nn.gin.GIN(num_layers, in_feats, out_feats, hidden_dim, num_mlp_layers, eps=0,
                               pooling='sum', train_eps=False, dropout=0.5)
Bases: cogdl.models.base_model.BaseModel

Graph Isomorphism Network from paper “How Powerful are Graph Neural Networks?”.

---


```

Parameters

- **num_layers** – int Number of GIN layers
- **in_feats** – int Size of each input sample
- **out_feats** – int Size of each output sample
- **hidden_dim** – int Size of each hidden layer dimension
- **num_mlp_layers** – int Number of MLP layers
- **eps** – float32, optional Initial *epsilon* value, default: 0
- **pooling** – str, optional Aggregator type to use, default:sum
- **train_eps** – bool, optional If True, *epsilon* will be a learnable parameter, default: True

```
static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)
```

forward(batch)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

classmethod split_dataset(dataset, args)

training: bool

```
class cogdl.models.nn.grand.Grand(nfeat, nhid, nclass, input_droprate, hidden_droprate, use_bn,
dropnode_rate, order, alpha)
```

Bases: *cogdl.models.base_model.BaseModel*

Implementation of GRAND in paper “*Graph Random Neural Networks for Semi-Supervised Learning on Graphs*” <<https://arxiv.org/abs/2005.11079>>

Parameters

- **nfeat** (int) – Size of each input features.
- **nhid** (int) – Size of hidden features.
- **nclass** (int) – Number of output classes.
- **input_droprate** (float) – Dropout rate of input features.
- **hidden_droprate** (float) – Dropout rate of hidden features.
- **use_bn** (bool) – Using batch normalization.
- **dropnode_rate** (float) – Rate of dropping elements of input features
- **tem** (float) – Temperature to sharpen predictions.
- **lam** (float) – Proportion of consistency loss of unlabelled data
- **order** (int) – Order of adjacency matrix
- **sample** (int) – Number of augmentations for consistency loss
- **alpha** (float) –

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)**drop_node**(x)**forward**(graph)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

normalize_x(x)

```
predict(data)
rand_prop(graph, x)
training: bool

class cogdl.models.nn.gtn.GTN(num_edge, num_channels, w_in, w_out, num_class, num_nodes, num_layers)
Bases: cogdl.models.base_model.BaseModel

static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(graph)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
norm(edge_index, num_nodes, edge_weight, improved=False, dtype=None)
normalization(H)
training: bool

class cogdl.models.nn.rgcn.LinkPredictRGCN(num_entities, num_rels, hidden_size, num_layers,
                                             regularizer='basis', num_bases=None, self_loop=True,
                                             sampling_rate=0.01, penalty=0, dropout=0.0,
                                             self_dropout=0.0)
Bases: cogdl.utils.link_prediction_utils.GNNLinkPredict, cogdl.models.base_model.BaseModel

static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(graph)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
loss(graph, scoring)
predict(graph)
training: bool
```

```
class cogdl.models.nn.deepergcn.DeeperGCN(in_feat, hidden_size, out_feat, num_layers, activation='relu',
                                         dropout=0.0, aggr='max', beta=1.0, p=1.0,
                                         learn_beta=False, learn_p=False, learn_msg_scale=True,
                                         use_msg_norm=False, edge_attr_size=None)
```

Bases: `cogdl.models.base_model.BaseModel`

Implementation of DeeperGCN in paper “DeeperGCN: All You Need to Train Deeper GCNs”

Parameters

- `in_feat` (`int`) – the dimension of input features
- `hidden_size` (`int`) – the dimension of hidden representation
- `out_feat` (`int`) – the dimension of output features
- `num_layers` (`int`) – the number of layers
- `activation` (`str`, `optional`) – activation function. Defaults to “relu”.
- `dropout` (`float`, `optional`) – dropout rate. Defaults to 0.0.
- `aggr` (`str`, `optional`) – aggregation function. Defaults to “max”.
- `beta` (`float`, `optional`) – a coefficient for aggregation function. Defaults to 1.0.
- `p` (`float`, `optional`) – a coefficient for aggregation function. Defaults to 1.0.
- `learn_beta` (`bool`, `optional`) – whether beta is learnable. Defaults to False.
- `learn_p` (`bool`, `optional`) – whether p is learnable. Defaults to False.
- `learn_msg_scale` (`bool`, `optional`) – whether message scale is learnable. Defaults to True.
- `use_msg_norm` (`bool`, `optional`) – use message norm or not. Defaults to False.
- `edge_attr_size` (`int`, `optional`) – the dimension of edge features. Defaults to None.

static `add_args(parser)`

Add model-specific arguments to the parser.

classmethod `build_model_from_args(args)`

`forward(graph)`

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

`predict(graph)`

`training: bool`

```
class cogdl.models.nn.drgat.DrGAT(num_features, num_classes, hidden_size, num_heads, dropout)
```

Bases: `cogdl.models.base_model.BaseModel`

static `add_args(parser)`

Add model-specific arguments to the parser.

classmethod `build_model_from_args(args)`

forward(graph)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool**class cogdl.models.nn.infograph.InfoGraph(in_feats, hidden_dim, out_feats, num_layers=3, sup=False)**

Bases: *cogdl.models.base_model.BaseModel*

Implementation of Infograph in paper "InfoGraph: Unsupervised and Semi-supervised Graph-Level Representation

Learning via Mutual Information Maximization" <<https://openreview.net/forum?id=r1lfF2NYvH>>`

in_feats [int] Size of each input sample.

out_feats [int] Size of each output sample.

num_layers [int, optional] Number of MLP layers in encoder, default: 3.

unsup [bool, optional] Use unsupervised model if True, default: True.

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)**forward(batch)**

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

reset_parameters()**classmethod split_dataset(dataset, args)****sup_forward(batch, x)****training: bool****unsup_forward(batch, x)****class cogdl.models.nn.dropedge_gcn.DropEdge_GCN(nfeat, nhid, nclass, nhidlayer, dropout, baseblock, inputlayer, outputlayer, nbaselayer, activation, withbn, withloop, aggrmethod)**

Bases: *cogdl.models.base_model.BaseModel*

DropEdge: Towards Deep Graph Convolutional Networks on Node Classification Applying DropEdge to GCN @ <https://arxiv.org/pdf/1907.10903.pdf>

The model for the single kind of deepgcn blocks. The model architecture likes: input-layer(nfeat)–block(nbaserlayer, nhid)–...–outputlayer(nclass)–softmax(nclass)

|----- nhidlayer -----|

The total layer is nhidlayer*nbaselayer + 2. All options are configurable.

Args: Initial function. :param nfeat: the input feature dimension. :param nhid: the hidden feature dimension. :param nclass: the output feature dimension. :param nhidlayer: the number of hidden blocks. :param dropout: the dropout ratio. :param baseblock: the baseblock type, can be “mutigcn”, “resgcn”, “densegcn” and “inceptiongcn”. :param inputlayer: the input layer type, can be “gcn”, “dense”, “none”. :param outputlayer: the input layer type, can be “gcn”, “dense”. :param nbaselayer: the number of layers in one hidden block. :param activation: the activation function, default is ReLu. :param withbn: using batch normalization in graph convolution. :param withloop: using self feature modeling in graph convolution. :param aggrmethod: the aggregation function for baseblock, can be “concat” and “add”. For “resgcn”, the default is “add”, for others the default is “concat”.

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(graph)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

predict(data)

reset_parameters()

training: bool

class cogdl.models.nn.disengcn.DisenGCN(in_feats, hidden_size, num_classes, K, iterations, tau, dropout, activation)

Bases: *cogdl.models.base_model.BaseModel*

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(graph)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

predict(data)

reset_parameters()

training: bool

```
class cogdl.models.nn.mlp.MLP(in_feats, out_feats, hidden_size, num_layers, dropout=0.0, activation='relu',
                               norm=None, act_first=False, bias=True)
Bases: cogdl.models.base_model.BaseModel

static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(x)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
predict(data)
training: bool

class cogdl.models.nn.sgc.sgc(in_feats, out_feats)
Bases: cogdl.models.base_model.BaseModel

static add_args(parser)
    Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

forward(graph)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
predict(data)
training: bool

class cogdl.models.nn.sortpool.SortPool(in_feats, hidden_dim, num_classes, num_layers, out_channel,
                                         kernel_size, k=30, dropout=0.5)
Bases: cogdl.models.base_model.BaseModel

Implementation of sortpooling in paper “An End-to-End Deep Learning Architecture for Graph Classification”
<https://www.cse.wustl.edu/~muhan/papers/AAAI\_2018\_DGCNN.pdf>__.
```

Parameters

- **in_feats** (`int`) – Size of each input sample.
- **out_feats** (`int`) – Size of each output sample.
- **hidden_dim** (`int`) – Dimension of hidden layer embedding.
- **num_classes** (`int`) – Number of target classes.
- **num_layers** (`int`) – Number of graph neural network layers before pooling.

- **k** (*int*, *optional*) – Number of selected features to sort, default: 30.
- **out_channel** (*int*) – Number of the first convolution’s output channels.
- **kernel_size** (*int*) – Size of the first convolution’s kernel.
- **dropout** (*float*, *optional*) – Size of dropout, default: 0.5.

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
```

```
forward(batch)
```

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
classmethod split_dataset(dataset, args)
```

```
training: bool
```

```
class cogdl.models.nn.srgcn.SRGCN(in_feats, hidden_size, out_feats, attention, activation, nhop,  
normalization, dropout, node_dropout, alpha, nhead, subheads)
```

Bases: *cogdl.models.base_model.BaseModel*

```
static add_args(parser)
```

Add model-specific arguments to the parser.

```
classmethod build_model_from_args(args)
```

```
forward(graph)
```

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
predict(data)
```

```
training: bool
```

```
class cogdl.models.nn.unsup_graphsage.SAGE(num_features, hidden_size, num_layers, sample_size,  
dropout)
```

Bases: *cogdl.models.base_model.BaseModel*

Implementation of unsupervised GraphSAGE in paper “*Inductive Representation Learning on Large Graphs*”
<<https://cs.stanford.edu/people/jure/pubs/graphsage-nips17.pdf>>

Parameters

- **num_features** (*int*) – Size of each input sample
- **hidden_size** (*int*) –
- **num_layers** (*int*) – The number of GNN layers.

- **samples_size** (*list*) – The number sampled neighbors of different orders
- **dropout** (*float*) –
- **walk_length** (*int*) – The length of random walk
- **negative_samples** (*int*) –

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)**embed(data)****forward(graph)**

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

sampling(edge_index, num_sample)**training: bool****class cogdl.models.nn.daegc.DAEGC(num_features, hidden_size, embedding_size, num_heads, dropout, num_clusters)**Bases: *cogdl.models.base_model.BaseModel*

The DAEGC model from the “Attributed Graph Clustering: A Deep Attentional Embedding Approach” paper

Parameters

- **num_clusters** (*int*) – Number of clusters.
- **T** (*int*) – Number of iterations to recalculate P and Q
- **gamma** (*float*) – Hyperparameter that controls two parts of the loss.

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)**forward(graph)**

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

get_2hop(edge_index)

add 2-hop neighbors as new edges

get_cluster_center()**get_features(data)**

```

recon_loss(z, adj)
set_cluster_center(center)
training: bool

class cogdl.models.nn.agc.AGC(num_clusters, max_iter, cpu)
Bases: cogdl.models.base_model.BaseModel

```

The AGC model from the “Attributed Graph Clustering via Adaptive Graph Convolution” paper

Parameters

- **num_clusters** (`int`) – Number of clusters.
- **max_iter** (`int`) – Max iteration to increase k

static add_args(parser)

Add model-specific arguments to the parser.

classmethod build_model_from_args(args)

compute_intra(x, clusters)

forward(data)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

2.9.4 Model Module

cogdl.models.**build_model**(args)

cogdl.models.**register_model**(name)

New model types can be added to cogdl with the `register_model()` function decorator. For example:

```

@register_model('gat')
class GAT(BaseModel):
    ...

```

Parameters `name` (`str`) – the name of the model

cogdl.models.**try_adding_model_args**(model, parser)

2.10 data wrappers

2.10.1 Node Classification

```
class cogdl.wrappers.data_wrapper.node_classification.ClusterWrapper(dataset, method='metis',
                                                                      batch_size=20,
                                                                      n_cluster=100)
Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper
static add_args(parser)
get_train_dataset()
    Return the wrapped dataset for specific usage. For example, return ClusteredDataset in cluster_dw for
    DDP training.
test_wrapper()
train_wrapper()
```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

val_wrapper()

```
class cogdl.wrappers.data_wrapper.node_classification.GraphSAGEDataWrapper(dataset,
                                                                           batch_size: int,
                                                                           sample_size: list)
```

Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

static add_args(parser)

get_train_dataset()

Return the *wrapped* dataset for specific usage. For example, return *ClusteredDataset* in cluster_dw for
DDP training.

test_wrapper()

train_transform(batch)

train_wrapper()

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

val_transform(batch)

val_wrapper()

```

class cogdl.wrappers.data_wrapper.node_classification.M3SDataWrapper(dataset, label_rate,
approximate, alpha)
Bases: cogdl.wrappers.data_wrapper.node_classification.node_classification_dw.
FullBatchNodeClfDataWrapper

static add_args(parser)
get_dataset()
post_stage(stage, model_w_out)
    Processing after each run
pre_stage(stage, model_w_out)
    Processing before each run
pre_transform()
    Data Preprocessing before all runs

class cogdl.wrappers.data_wrapper.node_classification.NetworkEmbeddingDataWrapper(dataset)
Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

test_wrapper()
train_wrapper()

```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

```

class cogdl.wrappers.data_wrapper.node_classification.FullBatchNodeClfDataWrapper(dataset)
Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

pre_transform()
    Data Preprocessing before all runs
test_wrapper()
train_wrapper() → cogdl.data.data.Graph

```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

val_wrapper()

```

class cogdl.wrappers.data_wrapper.node_classification.PPRGoDataWrapper(dataset, topk,
alpha=0.2,
norm='sym',
batch_size=512,
eps=0.0001,
test_batch_size=-1)
Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

```

```
static add_args(parser)
test_wrapper()
train_wrapper()

batch: tuple(x, targets, ppr_scores, y) x:           shape=(b,          num_features)      targets:
                                                 shape=(num_edges_of_batch,)

ppr_scores: shape=(num_edges_of_batch,) y: shape=(b, num_classes)

val_wrapper()

class cogdl.wrappers.data_wrapper.node_classification.SAGNDatawrapper(dataset, batch_size,
label_nhop, threshold,
nhop)

Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

static add_args(parser)
post_stage_wrapper()
pre_stage(stage, model_w_out)
Processing before each run
pre_stage_transform(batch)
pre_transform()
Data Preprocessing before all runs
test_transform(batch)
test_wrapper()
train_transform(batch)
train_wrapper()
```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

```
val_transform(batch)
val_wrapper()
```

2.10.2 Graph Classification

```
class cogdl.wrappers.data_wrapper.graph_classification.GraphClassificationDatawrapper(dataset,
de-
gree_node_features=F,
batch_size=32,
train_ratio=0.5,
test_ratio=0.3)

Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

static add_args(parser)
```

```
setup_node_features()
test_wrapper()
train_wrapper()
```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

```
val_wrapper()
```

```
class cogdl.wrappers.data_wrapper.graph_classification.GraphEmbeddingDataWrapper(dataset,
de-
gree_node_features=False)
```

Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

```
static add_args(parser)
```

```
pre_transform()
```

Data Preprocessing before all runs

```
test_wrapper()
```

```
train_wrapper()
```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

```
class cogdl.wrappers.data_wrapper.graph_classification.InfoGraphDataWrapper(dataset, de-
gree_node_features=False, batch_size=32, train_ratio=0.5, test_ratio=0.3)
```

Bases: cogdl.wrappers.data_wrapper.graph_classification.graph_classification_dw.
GraphClassificationDataWrapper

```
test_wrapper()
```

```
class cogdl.wrappers.data_wrapper.graph_classification.PATCHY_SAN_DataWrapper(dataset,
num_sample, num_neighbor, stride, *args, **kwargs)
```

Bases: cogdl.wrappers.data_wrapper.graph_classification.graph_classification_dw.
GraphClassificationDataWrapper

```
static add_args(parser)
```

pre_transform()

Data Preprocessing before all runs

2.10.3 Pretraining

```
class cogdl.wrappers.data_wrapper.pretraining.GCCDataWrapper(dataset, batch_size, finetune=False,
                                                               num_workers=4, rw_hops=64,
                                                               subgraph_size=128,
                                                               restart_prob=0.8,
                                                               positional_embedding_size=128,
                                                               task='node_classification')

Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

static add_args(parser)
train_wrapper()
```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

2.10.4 Link Prediction

```
class cogdl.wrappers.data_wrapper.link_prediction.EmbeddingLinkPredictionDataWrapper(dataset,
                                                                                     negative_ratio)

Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

static add_args(parser)
pre_transform()
    Data Preprocessing before all runs
test_wrapper()
train_wrapper()
```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

```
class cogdl.wrappers.data_wrapper.link_prediction.GNNKGLinkPredictionDataWrapper(dataset)

Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

test_wrapper()
train_wrapper()
```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

val_wrapper()

```
class cogdl.wrappers.data_wrapper.link_prediction.GNNLinkPredictionDataWrapper(dataset)
Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper
```

pre_transform()

Data Preprocessing before all runs

test_wrapper()

```
static train_test_edge_split(edge_index, num_nodes, val_ratio=0.1, test_ratio=0.2)
```

train_wrapper()

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

val_wrapper()

2.10.5 Heterogeneous

```
class cogdl.wrappers.data_wrapper.heterogeneous.HeterogeneousEmbeddingDataWrapper(dataset)
Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper
```

test_wrapper()

train_wrapper()

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

```
class cogdl.wrappers.data_wrapper.heterogeneous.HeterogeneousGNNDataWrapper(dataset)
```

Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

test_wrapper()

train_wrapper()

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

val_wrapper()

```
class cogdl.wrappers.data_wrapper.heterogeneous.MultiplexEmbeddingDataWrapper(dataset)
Bases: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper

test_wrapper()

train_wrapper()
```

Returns

1. DataLoader
2. cogdl.Graph
3. list of DataLoader or Graph

Any other data formats other than DataLoader will not be traversed

2.11 model wrappers

2.11.1 Node Classification

```
class cogdl.wrappers.model_wrapper.node_classification.DGIModelWrapper(model, optimizer_cfg)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.UnsupervisedModelWrapper

static add_args(parser)
static augment(graph)
setup_optimizer()
test_step(graph)
train_step(subgraph)
training: bool

class cogdl.wrappers.model_wrapper.node_classification.GCNMixModelWrapper(model,
                                                                           optimizer_cfg,
                                                                           temperature,
                                                                           rampup_starts,
                                                                           rampup_ends,
                                                                           mixup_consistency,
                                                                           ema_decay, tau, k)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper

GCNMixModelWrapper calls forward_aux in model forward_aux is similar to forward but ignores spmm operation.

static add_args(parser)
setup_optimizer()
```

```

test_step(subgraph)
train_step(subgraph)
training: bool
update_aux(data, vector_labels, train_index)
update_soft(graph)
val_step(subgraph)

class cogdl.wrappers.model_wrapper.node_classification.GRACEModelWrapper(model,
                                                                    optimizer_cfg, tau,
                                                                    drop_feature_rates,
                                                                    drop_edge_rates,
                                                                    batch_fwd,
                                                                    proj_hidden_size)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.UnsupervisedModelWrapper

static add_args(parser)
batched_loss(z1: torch.Tensor, z2: torch.Tensor, batch_size: int)
contrastive_loss(z1: torch.Tensor, z2: torch.Tensor)
prop(graph: cogdl.data.data.Graph, x: torch.Tensor, drop_feature_rate: float = 0.0, drop_edge_rate: float = 0.0)
setup_optimizer()
test_step(graph)
train_step(subgraph)
training: bool

class cogdl.wrappers.model_wrapper.node_classification.GrandModelWrapper(model,
                                                                    optimizer_cfg,
                                                                    sample=2,
                                                                    temperature=0.5,
                                                                    lmbda=0.5)
Bases: cogdl.wrappers.model_wrapper.node_classification.node_classification_mw.NodeClfModelWrapper

sample [int] Number of augmentations for consistency loss
temperature [float] Temperature to sharpen predictions.
lmbda [float] Proportion of consistency loss of unlabelled data
static add_args(parser)
consistency_loss(logps, train_mask)
train_step(batch)
training: bool

class cogdl.wrappers.model_wrapper.node_classification.MVGRLModelWrapper(model,
                                                                    optimizer_cfg)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.UnsupervisedModelWrapper

setup_optimizer()
test_step(graph)

```

```
train_step(subgraph)
training: bool

class cogdl.wrappers.model_wrapper.node_classification.SelfAuxiliaryModelWrapper(model,
                                                                 opti-
                                                                 mizer_cfg,
                                                                 auxil-
                                                                 iary_task,
                                                                 drope-
                                                                 dge_rate,
                                                                 mask_ratio,
                                                                 sampling)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.UnsupervisedModelWrapper

static add_args(parser)
generate_virtual_labels(data)
pre_stage(stage, data_w)
setup_optimizer()
test_step(graph)
train_step(subgraph)
training: bool

class cogdl.wrappers.model_wrapper.node_classification.GraphSAGEModelWrapper(model,
                                                                 optimizer_cfg)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper

setup_optimizer()
test_step(batch)
train_step(batch)
training: bool
val_step(batch)

class cogdl.wrappers.model_wrapper.node_classification.UnsupGraphSAGEModelWrapper(model,
                                                                 opti-
                                                                 mizer_cfg,
                                                                 walk_length,
                                                                 nega-
                                                                 tive_samples)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.UnsupervisedModelWrapper

static add_args(parser)
setup_optimizer()
test_step(graph)
train_step(batch)
training: bool
```

```

class cogdl.wrappers.model_wrapper.node_classification.M3SModelWrapper(model, optimizer_cfg,
n_cluster,
num_new_labels)
Bases: cogdl.wrappers.model_wrapper.node_classification.node_classification_mw.
NodeClfModelWrapper

static add_args(parser)
pre_stage(stage, data_w: cogdl.wrappers.data_wrapper.base_data_wrapper.DataWrapper)
training: bool

class cogdl.wrappers.model_wrapper.node_classification.NetworkEmbeddingModelWrapper(model,
num_shuffle=1,
train-
ing_percents=[0.1],
en-
hance=None,
max_evals=10,
num_workers=1)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.EmbeddingModelWrapper

static add_args(parser)
test_step(batch)
train_step(batch)
training: bool

class cogdl.wrappers.model_wrapper.node_classification.NodeClfModelWrapper(model,
optimizer_cfg)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper

set_early_stopping()

```

Returns

1. *str*, the monitoring metric
2. ***tuple(str, str), that is, (the monitoring metric, small or big). The second parameter means, the smaller, the better or the bigger, the better***

```

setup_optimizer()
test_step(batch)
train_step(subgraph)
training: bool
val_step(subgraph)

```

```

class cogdl.wrappers.model_wrapper.node_classification.CorrectSmoothModelWrapper(model,
opti-
mizer_cfg)
Bases: cogdl.wrappers.model_wrapper.node_classification.node_classification_mw.
NodeClfModelWrapper

static add_args(parser)
test_step(batch)
training: bool

```

```
    val_step(subgraph)
class cogdl.wrappers.model_wrapper.node_classification.PPRGoModelWrapper(model,
                                                                           optimizer_cfg)
    Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper
    setup_optimizer()
    test_step(batch)
    train_step(batch)
    training: bool
    val_step(batch)

class cogdl.wrappers.model_wrapper.node_classification.SAGNModelWrapper(model, optimizer_cfg)
    Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper
    pre_stage(stage, data_w)
    setup_optimizer()
    test_step(batch)
    train_step(batch)
    training: bool
    val_step(batch)
```

2.11.2 Graph Classification

```
    class cogdl.wrappers.model_wrapper.graph_classification.GraphClassificationModelWrapper(model,
                                                                                           optimizer_cfg)
        Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper
        setup_optimizer()
        test_step(batch)
        train_step(batch)
        training: bool
        val_step(batch)

    class cogdl.wrappers.model_wrapper.graph_classification.GraphEmbeddingModelWrapper(model)
        Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.EmbeddingModelWrapper
        test_step(batch)
        train_step(batch)
        training: bool

    class cogdl.wrappers.model_wrapper.graph_classification.InfoGraphModelWrapper(model,
                                                                                      optimizer_cfg,
                                                                                      sup=False)
        Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper
        static add_args(parser)
        static mi_loss(pos_mask, neg_mask, mi, pos_div, neg_div)
```

```

setup_optimizer()
sup_loss(pred, batch)
test_step(dataset)
train_step(batch)
training: bool
unsup_loss(graph_feat, node_feat, batch)

```

2.11.3 Pretraining

```

class cogdl.wrappers.model_wrapper.pretraining.GCCModelWrapper(model, optimizer_cfg, nce_k,
                    nce_t, momentum, output_size,
                    finetune=False, num_classes=1,
                    model_path='gcc_pretrain.pt')

Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper

static add_args(parser)
load_checkpoint(path)
post_stage(stage, data_w)
pre_stage(stage, data_w)
save_checkpoint(path)
setup_optimizer()
train_step(batch)
train_step_finetune(batch)
train_step_pretraining(batch)
training: bool

```

2.11.4 Link Prediction

```

class cogdl.wrappers.model_wrapper.link_prediction.EmbeddingLinkPredictionModelWrapper(model)
Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.EmbeddingModelWrapper

test_step(batch)
train_step(graph)
training: bool

class cogdl.wrappers.model_wrapper.link_prediction.GNNKGLinkPredictionModelWrapper(model,
                                    opti-
                                    mizer_cfg,
                                    score_func)

Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper

static add_args(parser)
eval_step(graph, mask1, mask2)
set_early_stopping()

```

Returns

1. *str*, the monitoring metric
2. **tuple(str, str)**, that is, (the monitoring metric, *small* or *big*). The second parameter means, *the smaller, the better or the bigger, the better*

setup_optimizer()**test_step**(*subgraph*)**train_step**(*subgraph*)**training:** *bool***val_step**(*subgraph*)

```
class cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPredictionModelWrapper(model,  
                                     optimizer_cfg)
```

Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper

static get_link_labels(*num_pos*, *num_neg*, *device*=None)**set_early_stopping()****Returns**

1. *str*, the monitoring metric
2. **tuple(str, str)**, that is, (the monitoring metric, *small* or *big*). The second parameter means, *the smaller, the better or the bigger, the better*

setup_optimizer()**test_step**(*subgraph*)**train_step**(*subgraph*)**training:** *bool***val_step**(*subgraph*)

2.11.5 Heterogeneous

```
class cogdl.wrappers.model_wrapper.heterogeneous.HeterogeneousEmbeddingModelWrapper(model,  
                                     hid_size=200)
```

Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.EmbeddingModelWrapper

static add_args(*parser*: *argparse.ArgumentParser*)

Add task-specific arguments to the parser.

test_step(*batch*)**train_step**(*batch*)**training:** *bool*

```
class cogdl.wrappers.model_wrapper.heterogeneous.HeterogeneousGNNModelWrapper(model,  
                                     optimizer_cfg)
```

Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper

setup_optimizer()

```

test_step(batch)
train_step(batch)
training: bool
val_step(batch)

class cogdl.wrappers.model_wrapper.heterogeneous.MultiplexEmbeddingModelWrapper(model, hid-
    den_size=200,
    eval_type='all')

Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.EmbeddingModelWrapper

static add_args(parser: argparse.ArgumentParser)
    Add task-specific arguments to the parser.

test_step(batch)
train_step(batch)
training: bool

```

2.11.6 Clustering

```

class cogdl.wrappers.model_wrapper.clustering.AGCModelWrapper(model, optimizer_cfg, num_clusters,
    cluster_method='kmeans',
    evaluation='full', max_iter=5)

Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.EmbeddingModelWrapper

static add_args(parser)
test_step(batch)
train_step(graph)
training: bool

class cogdl.wrappers.model_wrapper.clustering.DAEGCModelWrapper(model, optimizer_cfg,
    num_clusters,
    cluster_method='kmeans',
    evaluation='full', T=5)

Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper

static add_args(parser)
cluster_loss(P, Q)
getP(Q)
getQ(z, cluster_center)
post_stage(stage, data_w)
pre_stage(stage, data_w)
recon_loss(z, adj)
setup_optimizer()
test_step(subgraph)
train_step(subgraph)
training: bool

```

```
class cogdl.wrappers.model_wrapper.clustering.GAEModelWrapper(model, optimizer_cfg, num_clusters,
                                                               cluster_method='kmeans',
                                                               evaluation='full')

Bases: cogdl.wrappers.model_wrapper.base_model_wrapper.ModelWrapper

static add_args(parser)
pre_stage(stage, data_w)
setup_optimizer()
test_step(subgraph)
train_step(subgraph)
training: bool
```

2.12 layers

```
class cogdl.layers.gcn_layer.GCNLayer(in_features, out_features, dropout=0.0, activation=None,
                                       residual=False, norm=None, bias=True, **kwargs)

Bases: torch.nn.modules.module.Module

Simple GCN layer, similar to https://arxiv.org/abs/1609.02907

forward(graph, x)
    Defines the computation performed at every call.

    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
reset_parameters()
training: bool

class cogdl.layers.gat_layer.GATLayer(in_feats, out_feats, nhead=1, alpha=0.2, attn_drop=0.5,
                                       activation=None, residual=False, norm=None)

Bases: torch.nn.modules.module.Module

Sparse version GAT layer, similar to https://arxiv.org/abs/1710.10903

forward(graph, x)
    Defines the computation performed at every call.

    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
reset_parameters()
training: bool
```

```
class cogdl.layers.sage_layer.MaxAggregator
    Bases: object

class cogdl.layers.sage_layer.MeanAggregator
    Bases: object

class cogdl.layers.sage_layer.SAGELayer(in_feats, out_feats, normalize=False, aggr='mean',
                                             dropout=0.0, norm=None, activation=None, residual=False)
    Bases: torch.nn.modules.module.Module

forward(graph, x)
    Defines the computation performed at every call.

    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.layers.sage_layer.SumAggregator
    Bases: object

class cogdl.layers.gin_layer.GINLayer(apply_func=None, eps=0, train_eps=True)
    Bases: torch.nn.modules.module.Module

Graph Isomorphism Network layer from paper “How Powerful are Graph Neural Networks?”.  


$$h_i^{(l+1)} = f_{\Theta} \left( (1 + \epsilon) h_i^l + \text{sum} \left( \{h_j^l, j \in \mathcal{N}(i)\} \right) \right)$$

```

Parameters

- **apply_func** (*callable layer function*) – layer or function applied to update node feature
- **eps** (*float32, optional*) – Initial *epsilon* value.
- **train_eps** (*bool, optional*) – If True, *epsilon* will be a learnable parameter.

```
forward(graph, x)
    Defines the computation performed at every call.

    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.layers.gcnii_layer.GCNIIlayer(n_channels, alpha=0.1, beta=1, residual=False)
    Bases: torch.nn.modules.module.Module

forward(graph, x, init_x)
    Symmetric normalization

reset_parameters()

training: bool
```

```
class cogdl.layers.deepergcn_layer.BondEncoder(bond_dim_list, emb_size)
```

Bases: torch.nn.modules.module.Module

forward(edge_attr)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

```
class cogdl.layers.deepergcn_layer.EdgeEncoder(in_feats, out_feats, bias=False)
```

Bases: torch.nn.modules.module.Module

forward(edge_attr)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

```
class cogdl.layers.deepergcn_layer.GENConv(in_feats: int, out_feats: int, aggr: str = 'softmax_sg', beta:  
float = 1.0, p: float = 1.0, learn_beta: bool = False,  
learn_p: bool = False, use_msg_norm: bool = False,  
learn_msg_scale: bool = True, norm: Optional[str] = None,  
residual: bool = False, activation: Optional[str] = None,  
num_mlp_layers: int = 2, edge_attr_size: Optional[list] =  
None)
```

Bases: torch.nn.modules.module.Module

forward(graph, x)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

message_norm(x, msg)

training: bool

```
class cogdl.layers.deepergcn_layer.ResGNNLayer(conv, in_channels, activation='relu',  
norm='batchnorm', dropout=0.0, out_norm=None,  
out_channels=-1, residual=True,  
checkpoint_grad=False)
```

Bases: torch.nn.modules.module.Module

Implementation of DeeperGCN in paper “DeeperGCN: All You Need to Train Deeper GCNs”

Parameters

- **conv** (`nn.Module`) – An instance of GNN Layer, receiving (graph, x) as inputs
- **n_channels** (`int`) – size of input features
- **activation** (`str`) –
- **norm** (`str`) – type of normalization, `batchnorm` as default
- **dropout** (`float`) –
- **checkpoint_grad** (`bool`) –

forward(`graph, x, dropout=None, *args, **kwargs`)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: `bool`

```
class cogdl.layers.disengcn_layer.DisenGCNLayer(in_feats, out_feats, K, iterations, tau=1.0,
                                                activation='leaky_relu')
```

Bases: `torch.nn.modules.module.Module`

Implementation of “Disentangled Graph Convolutional Networks”.

forward(`graph, x`)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

reset_parameters()

training: `bool`

```
class cogdl.layers.han_layer.AttentionLayer(num_features)
```

Bases: `torch.nn.modules.module.Module`

forward(`x`)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: `bool`

```
class cogdl.layers.han_layer.HANLayer(num_edge, w_in, w_out)
```

Bases: torch.nn.modules.module.Module

forward(graph, x)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

```
class cogdl.layers.mlp_layer.MLP(in_feats, out_feats, hidden_size, num_layers, dropout=0.0,
                                  activation='relu', norm=None, act_first=False, bias=True)
```

Bases: torch.nn.modules.module.Module

Multilayer perception with normalization

$$x^{(i+1)} = \sigma(W^i x^{(i)})$$

Parameters

- **in_feats** (int) – Size of each input sample.
- **out_feats** (int) – Size of each output sample.
- **hidden_dim** (int) – Size of hidden layer dimension.
- **use_bn** (bool, optional) – Apply batch normalization if True, default: *True*.

forward(x)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

reset_parameters()

training: bool

```
class cogdl.layers.pprgo_layer.LinearLayer(in_features, out_features, bias=True)
```

Bases: torch.nn.modules.module.Module

forward(input)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

reset_parameters()

```
training: bool
class cogdl.layers.pprgo_layer.PPRGoLayer(in_feats, hidden_size, out_feats, num_layers, dropout,
                                         activation='relu')
```

Bases: torch.nn.modules.module.Module

forward(*x*)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: bool

```
class cogdl.layers.rgcn_layer.RGCNLayer(in_feats, out_feats, num_edge_types, regularizer='basis',
                                         num_bases=None, self_loop=True, dropout=0.0,
                                         self_dropout=0.0, layer_norm=True, bias=True)
```

Bases: torch.nn.modules.module.Module

Implementation of Relational-GCN in paper “Modeling Relational Data with Graph Convolutional Networks”

Parameters

- **in_feats** (*int*) – Size of each input embedding.
- **out_feats** (*int*) – Size of each output embedding.
- **num_edge_type** (*int*) – The number of edge type in knowledge graph.
- **regularizer** (*str, optional*) – Regularizer used to avoid overfitting, basis or bdd, default : basis.
- **num_bases** (*int, optional*) – The number of basis, only used when *regularizer* is basis, default : None.
- **self_loop** (*bool, optional*) – Add self loop embedding if True, default : True.
- **dropout** (*float*) –
- **self_dropout** (*float, optional*) – Dropout rate of self loop embedding, default : 0.0
- **layer_norm** (*bool, optional*) – Use layer normalization if True, default : True
- **bias** (*bool*) –

basis_forward(*graph*, *x*)

bdd_forward(*graph*, *x*)

forward(*graph*, *x*)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

reset_parameters()

training: `bool`

Modified from <https://github.com/GraphSAINT/GraphSAINT>

class `cogdl.layers.saint_layer.SAINTLayer(dim_in, dim_out, dropout=0.0, act='relu', order=1, aggr='mean', bias='norm-nn', **kwargs)`

Bases: `torch.nn.modules.module.Module`

forward(*graph, x*)

Inputs: graph normalized adj matrix of the subgraph x 2D matrix of input node features

Outputs: feat_out 2D matrix of output node features

training: `bool`

class `cogdl.layers.sgc_layer.SGCLayer(in_features, out_features, order=3)`

Bases: `torch.nn.modules.module.Module`

forward(*graph, x*)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

training: `bool`

class `cogdl.layers.mixhop_layer.MixHopLayer(num_features, adj_pows, dim_per_pow)`

Bases: `torch.nn.modules.module.Module`

adj_pow_x(*graph, x, p*)

forward(*graph, x*)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the `Module` instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

reset_parameters()

training: `bool`

class `cogdl.layers.se_layer.SELayer(in_channels, se_channels)`

Bases: `torch.nn.modules.module.Module`

Squeeze-and-excitation networks

forward(*x*)

training: `bool`

2.13 options

```
cogdl.options.add_data_wrapper_args(parser)
cogdl.options.add_dataset_args(parser)
cogdl.options.add_model_args(parser)
cogdl.options.add_model_wrapper_args(parser)
cogdl.options.get_default_args(dataset, model, **kwargs)
cogdl.options.get_diff_args(args1, args2)
cogdl.options.get_display_data_parser()
cogdl.options.get_download_data_parser()
cogdl.options.get_parser()
cogdl.options.get_training_parser()
cogdl.options.parse_args_and_arch(parser, args)
```

2.14 utils

```
class cogdl.utils.utils.ArgClass
    Bases: object

cogdl.utils.utils.alias_draw(J, q)
    Draw sample from a non-uniform discrete distribution using alias sampling.

cogdl.utils.utils.alias_setup(probs)
    Compute utility lists for non-uniform sampling from discrete distributions. Refer to https://hips.seas.harvard.edu/blog/2013/03/03/the-alias-method-efficient-sampling-with-many-discrete-outcomes/ for details

cogdl.utils.utils.batch_max_pooling(x, batch)
cogdl.utils.utils.batch_mean_pooling(x, batch)
cogdl.utils.utils.batch_sum_pooling(x, batch)
cogdl.utils.utils.build_args_from_dict(dic)
cogdl.utils.utils.cycle_index(num, shift)
cogdl.utils.utils.download_url(url, folder, name=None, log=True)
    Downloads the content of an URL to a specific folder.
```

Parameters

- **url** (*string*) – The url.
- **folder** (*string*) – The folder.
- **name** (*string*) – saved filename.
- **log** (*bool*, *optional*) – If *False*, will not print anything to the console. (default: *True*)

cogdl.utils.utils.get_activation(*act: str, inplace=False*)

cogdl.utils.utils.get_memory_usage(*print_info=False*)

Get accurate gpu memory usage by querying torch runtime

```
cogdl.utils.utils.get_norm_layer(norm: str, channels: int)
```

Parameters

- **norm** – str type of normalization: *layernorm*, *batchnorm*, *instancenorm*
- **channels** – int size of features for normalization

```
cogdl.utils.utils.identity_act(input)
```

```
cogdl.utils.utils.makedirs(path)
```

```
cogdl.utils.utils.print_result(results, datasets, model_name)
```

```
cogdl.utils.utils.set_random_seed(seed)
```

```
cogdl.utils.utils.split_dataset_general(dataset, args)
```

```
cogdl.utils.utils.tabulate_results(results_dict)
```

```
cogdl.utils.utils.untar(path, fname, deleteTar=True)
```

Unpacks the given archive file to the same directory, then (by default) deletes the archive file.

```
cogdl.utils.utils.update_args_from_dict(args, dic)
```

```
class cogdl.utils.evaluator.Accuracy(mini_batch=False)
```

Bases: `object`

```
clear()
```

```
evaluate()
```

```
class cogdl.utils.evaluator.BCEWithLogitsLoss
```

Bases: `torch.nn.modules.module.Module`

```
training: bool
```

```
class cogdl.utils.evaluator.BaseEvaluator(eval_func)
```

Bases: `object`

```
clear()
```

```
evaluate()
```

```
class cogdl.utils.evaluator.CrossEntropyLoss
```

Bases: `torch.nn.modules.module.Module`

```
training: bool
```

```
class cogdl.utils.evaluator.MultiClassMicroF1(mini_batch=False)
```

Bases: `cogdl.utils.evaluator.Accuracy`

```
class cogdl.utils.evaluator.MultiLabelMicroF1(mini_batch=False)
```

Bases: `cogdl.utils.evaluator.Accuracy`

```
cogdl.utils.evaluator.accuracy(y_pred, y_true)
```

```
cogdl.utils.evaluator.bce_with_logits_loss(y_pred, y_true, reduction='mean')
```

```
cogdl.utils.evaluator.cross_entropy_loss(y_pred, y_true)
```

```
cogdl.utils.evaluator.multiclass_f1(y_pred, y_true)
```

```
cogdl.utils.evaluator.multilabel_f1(y_pred, y_true, sigmoid=False)
```

```
cogdl.utils.evaluator.setup_evaluator(metric: Union[str, Callable])
```

```
class cogdl.utils.sampling.RandomWalker(adj=None, num_nodes=None)
Bases: object

build_up(adj, num_nodes)
walk(start, walk_length, restart_p=0.0)

cogdl.utils.sampling.random_walk(start, length, indptr, indices, p=0.0)
```

Parameters

- **start** – np.array(dtype=np.int32)
- **length** – int
- **indptr** – np.array(dtype=np.int32)
- **indices** – np.array(dtype=np.int32)
- **p** – float

Returns list(np.array(dtype=np.int32))

```
cogdl.utils.graph_utils.add_remaining_self_loops(edge_index, edge_weight=None, fill_value=1,
                                                num_nodes=None)
```

```
cogdl.utils.graph_utils.add_self_loops(edge_index, edge_weight=None, fill_value=1, num_nodes=None)
```

```
cogdl.utils.graph_utils.coalesce(row, col, value=None)
```

```
cogdl.utils.graph_utils.coo2csc(row, col, data, num_nodes=None, sorted=False)
```

```
cogdl.utils.graph_utils.coo2csr(row, col, data, num_nodes=None, ordered=False)
```

```
cogdl.utils.graph_utils.coo2csr_index(row, col, num_nodes=None)
```

```
cogdl.utils.graph_utils.csr2coo(indptr, indices, data)
```

```
cogdl.utils.graph_utils.csr2csc(indptr, indices, data=None)
```

```
cogdl.utils.graph_utils.get_degrees(row, col, num_nodes=None)
```

```
cogdl.utils.graph_utils.negative_edge_sampling(edge_index: Union[Tuple, torch.Tensor], num_nodes:
                                               Optional[int] = None, num_neg_samples:
                                               Optional[int] = None, undirected: bool = False)
```

```
cogdl.utils.graph_utils.remove_self_loops(indices, values=None)
```

```
cogdl.utils.graph_utils.row_normalization(num_nodes, row, col, val=None)
```

```
cogdl.utils.graph_utils.sorted_coo2csr(row, col, data, num_nodes=None, return_index=False)
```

```
cogdl.utils.graph_utils.symmetric_normalization(num_nodes, row, col, val=None)
```

```
cogdl.utils.graph_utils.to_undirected(edge_index, num_nodes=None)
```

Converts the graph given by `edge_index` to an undirected graph, so that $(j, i) \in \mathcal{E}$ for every edge $(i, j) \in \mathcal{E}$.

Parameters

- **edge_index** (`LongTensor`) – The edge indices.
- **num_nodes** (`int`, *optional*) – The number of nodes, *i.e.* `max_val + 1` of `edge_index`.
(default: `None`)

Return type `LongTensor`

```
class cogdl.utils.link_prediction_utils.ConvELayer(dim, num_filter=20, kernel_size=7, k_w=10,
                                                 dropout=0.3)
```

Bases: torch.nn.modules.module.Module

concat(*ent*, *rel*)

forward(*sub_emb*, *obj_emb*, *rel_emb*)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

predict(*sub_emb*, *obj_emb*, *rel_emb*)

training: bool

```
class cogdl.utils.link_prediction_utils.DistMultLayer
```

Bases: torch.nn.modules.module.Module

forward(*sub_emb*, *obj_emb*, *rel_emb*)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

predict(*sub_emb*, *obj_emb*, *rel_emb*)

training: bool

```
class cogdl.utils.link_prediction_utils.GNNLinkPredict
```

Bases: torch.nn.modules.module.Module

forward(*graph*)

Defines the computation performed at every call.

Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

get_edge_set(*edge_index*, *edge_types*)

training: bool

```
cogdl.utils.link_prediction_utils.cal_mrr(embedding, rel_embedding, edge_index, edge_type, scoring,
                                         protocol='raw', batch_size=1000, hits=[])
```

```
cogdl.utils.link_prediction_utils.get_filtered_rank(heads, tails, rels, embedding, rel_embedding,
                                                   batch_size, seen_data)
```

```
cogdl.utils.link_prediction_utils.get_rank(scores, target)
```

```
cogdl.utils.link_prediction_utils.get_raw_rank(heads, tails, rels, embedding, rel_embedding,
                                              batch_size, scoring)

cogdl.utils.link_prediction_utils.sampling_edge_uniform(edge_index, edge_types, edge_set,
                                                       sampling_rate, num_rels,
                                                       label_smoothing=0.0, num_entities=1)
```

Parameters

- **edge_index** – edge index of graph
- **edge_types** –
- **edge_set** – set of all edges of the graph, (h, t, r)
- **sampling_rate** –
- **num_rels** –
- **label_smoothing** (*Optional*) –
- **num_entities** (*Optional*) –

Returns sampled existing edges rels: types of sampled existing edges sampled_edges_all: existing edges with corrupted edges sampled_types_all: types of existing and corrupted edges labels: 0/1

Return type sampled_edges

```
cogdl.utils.ppr_utils.build_topk_ppr_matrix_from_data(edge_index, *args, **kwargs)
cogdl.utils.ppr_utils.calc_ppr_topk_parallel(indptr, indices, deg, alpha, epsilon, nodes, topk)
cogdl.utils.ppr_utils.construct_sparse(neighbors, weights, shape)
cogdl.utils.ppr_utils.ppr_topk(adj_matrix, alpha, epsilon, nodes, topk)
    Calculate the PPR matrix approximately using Anderson.
cogdl.utils.ppr_utils.topk_ppr_matrix(adj_matrix, alpha, eps, idx, topk, normalization='row')
    Create a sparse matrix where each node has up to the topk PPR neighbors and their weights.

class cogdl.utils.prone_utils.Gaussian(mu=0.5, theta=1, rescale=False, k=3)
    Bases: object
    prop(mx, emb)

class cogdl.utils.prone_utils.HeatKernel(t=0.5, theta0=0.6, theta1=0.4)
    Bases: object
    prop(mx, emb)
    prop_adjacency(mx)

class cogdl.utils.prone_utils.HeatKernelApproximation(t=0.2, k=5)
    Bases: object
    chebyshev(mx, emb)
    prop(mx, emb)
    taylor(mx, emb)

class cogdl.utils.prone_utils.NodeAdaptiveEncoder
    Bases: object
        • shrink negative values in signal/feature matrix
        • no learning
```

```
static prop(signal)

class cogdl.utils.prone_utils.PPR(alpha=0.5, k=10)
    Bases: object
        applying sparsification to accelerate computation

    prop(mx, emb)

class cogdl.utils.prone_utils.ProNE
    Bases: object

class cogdl.utils.prone_utils.SignalRescaling
    Bases: object
        • rescale signal of each node according to the degree of the node:
            – sigmoid(degree)
            – sigmoid(1/degree)

    prop(mx, emb)

cogdl.utils.prone_utils.get_embedding_dense(matrix, dimension)
cogdl.utils.prone_utils.propagate(mx, emb, stype, space=None)

class cogdl.utils.srgcn_utils.ColumnUniform
    Bases: torch.nn.modules.module.Module

    forward(edge_index, edge_attr, N)
        Defines the computation performed at every call.

        Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.utils.srgcn_utils.EdgeAttention(in_feat)
    Bases: torch.nn.modules.module.Module

    forward(x, edge_index, edge_attr)
        Defines the computation performed at every call.

        Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.utils.srgcn_utils.Gaussian(in_feat)
    Bases: torch.nn.modules.module.Module

    forward(x, edge_index, edge_attr)
        Defines the computation performed at every call.

        Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool
```

class cogdl.utils.srgcn_utils.**HeatKernel**(*in_feat*)
Bases: torch.nn.modules.module.Module

forward(*x*, *edge_index*, *edge_attr*)
Defines the computation performed at every call.
Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool
```

class cogdl.utils.srgcn_utils.**Identity**(*in_feat*)
Bases: torch.nn.modules.module.Module

forward(*x*, *edge_index*, *edge_attr*)
Defines the computation performed at every call.
Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool
```

class cogdl.utils.srgcn_utils.**NodeAttention**(*in_feat*)
Bases: torch.nn.modules.module.Module

forward(*x*, *edge_index*, *edge_attr*)
Defines the computation performed at every call.
Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool
```

class cogdl.utils.srgcn_utils.**NormIdentity**
Bases: torch.nn.modules.module.Module

forward(*edge_index*, *edge_attr*, *N*)
Defines the computation performed at every call.
Should be overridden by all subclasses.

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.utils.srgcn_utils.PPR(in_feat)
Bases: torch.nn.modules.module.Module

forward(x, edge_index, edge_attr)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.utils.srgcn_utils.RowSoftmax
Bases: torch.nn.modules.module.Module

forward(edge_index, edge_attr, N)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.utils.srgcn_utils.RowUniform
Bases: torch.nn.modules.module.Module

forward(edge_index, edge_attr, N)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool

class cogdl.utils.srgcn_utils.SymmetryNorm
Bases: torch.nn.modules.module.Module

forward(edge_index, edge_attr, N)
    Defines the computation performed at every call.
    Should be overridden by all subclasses.
```

Note: Although the recipe for forward pass needs to be defined within this function, one should call the Module instance afterwards instead of this since the former takes care of running the registered hooks while the latter silently ignores them.

```
training: bool
cogdl.utils.srgcn_utils.act_attention(attn_type)
cogdl.utils.srgcn_utils.act_map(act)
cogdl.utils.srgcn_utils.act_normalization(norm_type)
```

2.15 experiments

```
class cogdl.experiments.AutoML(args)
    Bases: object

        Parameters search_space – function to obtain hyper-parameters to search
        run()

cogdl.experiments.auto_experiment(args)
cogdl.experiments.default_search_space(trial)
cogdl.experiments.experiment(dataset, model=None, **kwargs)
cogdl.experiments.gen_variants(**items)
cogdl.experiments.output_results(results_dict, tablefmt='github')
cogdl.experiments.raw_experiment(args)
cogdl.experiments.set_best_config(args)
cogdl.experiments.train(args)
cogdl.experiments.variant_args_generator(args, variants)
    Form variants as group with size of num_workers
```

2.16 pipelines

```
class cogdl.pipelines.DatasetPipeline(app: str, **kwargs)
    Bases: cogdl.pipelines.Pipeline

class cogdl.pipelines.DatasetStatsPipeline(app: str, **kwargs)
    Bases: cogdl.pipelines.DatasetPipeline

class cogdl.pipelines.DatasetVisualPipeline(app: str, **kwargs)
    Bases: cogdl.pipelines.DatasetPipeline

class cogdl.pipelines.GenerateEmbeddingPipeline(app: str, model: str, **kwargs)
    Bases: cogdl.pipelines.Pipeline

class cogdl.pipelines.OAGBERTInferencePipeline(app: str, model: str, **kwargs)
    Bases: cogdl.pipelines.Pipeline
```

```
class cogdl.pipelines.Pipeline(app: str, **kwargs)
    Bases: object

class cogdl.pipelines.RecommendationPipeline(app: str, model: str, **kwargs)
    Bases: cogdl.pipelines.Pipeline

cogdl.pipelines.check_app(app: str)

cogdl.pipelines.pipeline(app: str, **kwargs) → cogdl.pipelines.Pipeline
```

CHAPTER
THREE

INDICES AND TABLES

- genindex
- modindex
- search

PYTHON MODULE INDEX

C

cogdl.data, 16
cogdl.datasets, 28
cogdl.datasets.gatne, 20
cogdl.datasets.gcc_data, 21
cogdl.datasets.gtn_data, 22
cogdl.datasets.han_data, 23
cogdl.datasets.kg_data, 23
cogdl.datasets.matlab_matrix, 24
cogdl.datasets.ogb, 25
cogdl.datasets.tu_data, 26
cogdl.experiments, 87
cogdl.layers.deepergcn_layer, 73
cogdl.layers.disengcn_layer, 75
cogdl.layers.gat_layer, 72
cogdl.layers.gcn_layer, 72
cogdl.layers.gcnii_layer, 73
cogdl.layers.gin_layer, 73
cogdl.layers.han_layer, 75
cogdl.layers.mixhop_layer, 78
cogdl.layers.mlp_layer, 76
cogdl.layers.pprgo_layer, 76
cogdl.layers.rgcn_layer, 77
cogdl.layers.sage_layer, 72
cogdl.layers.saint_layer, 78
cogdl.layers.se_layer, 78
cogdl.layers.sgc_layer, 78
cogdl.models, 57
cogdl.models.base_model, 28
cogdl.options, 79
cogdl.pipelines, 87
cogdl.utils.evaluator, 80
cogdl.utils.graph_utils, 81
cogdl.utils.link_prediction_utils, 81
cogdl.utils.ppr_utils, 83
cogdl.utils.prone_utils, 83
cogdl.utils.sampling, 80
cogdl.utils.srgcn_utils, 84
cogdl.utils.utils, 79

INDEX

A

Accuracy (*class in cogdl.utils.evaluator*), 80
accuracy() (*in module cogdl.utils.evaluator*), 80
ACM_GTNDataset (*class in cogdl.datasets.gtn_data*), 22
ACM_HANDataset (*class in cogdl.datasets.han_data*), 23
act_attention() (*in module cogdl.utils.srgcn_utils*), 87
act_map() (*in module cogdl.utils.srgcn_utils*), 87
act_normalization() (*in module cogdl.utils.srgcn_utils*), 87
add_args() (*cogdl.data.Dataset static method*), 18
add_args() (*cogdl.models.base_model.BaseModel static method*), 28
add_args() (*cogdl.models.emb.deepwalk.DeepWalk static method*), 31
add_args() (*cogdl.models.emb.dgk.DeepGraphKernel static method*), 32
add_args() (*cogdl.models.emb.dngr.DNGR static method*), 33
add_args() (*cogdl.models.emb.gatne.GATNE static method*), 32
add_args() (*cogdl.models.emb.graph2vec.Graph2Vec static method*), 34
add_args() (*cogdl.models.emb.grarep.GraRep static method*), 33
add_args() (*cogdl.models.emb.hin2vec.Hin2vec static method*), 30
add_args() (*cogdl.models.emb.hope.HOPE static method*), 29
add_args() (*cogdl.models.emb.line.LINE static method*), 37
add_args() (*cogdl.models.emb.metapath2vec.Metapath2vec static method*), 35
add_args() (*cogdl.models.emb.netmf.NetMF static method*), 30
add_args() (*cogdl.models.emb.netsmf.NetSMF static method*), 37
add_args() (*cogdl.models.emb.node2vec.Node2vec static method*), 35
add_args() (*cogdl.models.emb.prone.ProNE static method*), 38
add_args() (*cogdl.models.emb.pronepp.ProNEPP static method*), 34
add_args() (*cogdl.models.emb.pte.PTE static method*), 36
add_args() (*cogdl.models.emb.sdne.SDNE static method*), 38
add_args() (*cogdl.models.emb.spectral.Spectral static method*), 29
add_args() (*cogdl.models.nn.agc.AGC static method*), 57
add_args() (*cogdl.models.nn.compgcn.LinkPredictCompGCN static method*), 42
add_args() (*cogdl.models.nn.daegc.DAEGC static method*), 56
add_args() (*cogdl.models.nn.deepergcn.DeeperGCN static method*), 51
add_args() (*cogdl.models.nn.dgi.DGIModel static method*), 39
add_args() (*cogdl.models.nn.diffpool.DiffPool static method*), 44
add_args() (*cogdl.models.nn.disengcn.DisenGCN static method*), 53
add_args() (*cogdl.models.nn.drgat.DrGAT static method*), 51
add_args() (*cogdl.models.nn.drgcn.DrGCN static method*), 42
add_args() (*cogdl.models.nn.dropedge_gcn.DropEdge_GCN static method*), 53
add_args() (*cogdl.models.nn.gat.GAT static method*), 46
add_args() (*cogdl.models.nn.gcn.GCN static method*), 40
add_args() (*cogdl.models.nn.gcnii.GCNII static method*), 45
add_args() (*cogdl.models.nn.gcnmix.GCNMix static method*), 43
add_args() (*cogdl.models.nn.gdc_gcn.GDC_GCN static method*), 41
add_args() (*cogdl.models.nn.gin.GIN static method*), 48
add_args() (*cogdl.models.nn.grace.GRACE static method*), 47
add_args() (*cogdl.models.nn.grand.Grand static method*), 49

```

        method), 49
add_args() (cogdl.models.nn.graph_unet.GraphUnet
        static method), 43
add_args() (cogdl.models.nn.graphsage.Graphsage
        static method), 41
add_args() (cogdl.models.nn.gtn.GTN static method),
        50
add_args() (cogdl.models.nn.han.HAN static method),
        46
add_args() (cogdl.models.nn.infograph.InfoGraph
        static method), 52
add_args() (cogdl.models.nn.mixhop.MixHop static
        method), 45
add_args() (cogdl.models.nn.mlp.MLP static method),
        54
add_args() (cogdl.models.nn.mvgrl.MVGRL static
        method), 39
add_args() (cogdl.models.nn.patchy_san.PatchySAN
        static method), 40
add_args() (cogdl.models.nn.ppnp.PPNP static
        method), 47
add_args() (cogdl.models.nn.prrgo.PPRGo static
        method), 48
add_args() (cogdl.models.nn.rgcn.LinkPredictRGCN
        static method), 50
add_args() (cogdl.models.nn.sgc.sgc static method), 54
add_args() (cogdl.models.nn.sign.MLP static method),
        45
add_args() (cogdl.models.nn.sortpool.SortPool static
        method), 55
add_args() (cogdl.models.nn.srgcn.SRGCN static
        method), 55
add_args() (cogdl.models.nn.unsup_graphsage.SAGE
        static method), 56
add_args() (cogdl.wrappers.data_wrapper.graph_classification
        static method), 60
add_args() (cogdl.wrappers.data_wrapper.graph_classification
        static method), 61
add_args() (cogdl.wrappers.data_wrapper.graph_classification
        static method), 61
add_args() (cogdl.wrappers.data_wrapper.link_prediction
        static method), 62
add_args() (cogdl.wrappers.data_wrapper.node_classification
        static method), 58
add_args() (cogdl.wrappers.data_wrapper.node_classification
        static method), 58
add_args() (cogdl.wrappers.data_wrapper.node_classification
        static method), 59
add_args() (cogdl.wrappers.data_wrapper.node_classification
        static method), 59
add_args() (cogdl.wrappers.data_wrapper.node_classification
        static method), 60
add_args() (cogdl.wrappers.data_wrapper.pretraining.GCCModelWrapper
        static method), 62
add_args() (cogdl.wrappers.model_wrapper.clustering.AGCMModelWrapper
        static method), 71
add_args() (cogdl.wrappers.model_wrapper.clustering.DAEGCModelWrapping
        static method), 71
add_args() (cogdl.wrappers.model_wrapper.clustering.GAEModelWrapper
        static method), 72
add_args() (cogdl.wrappers.model_wrapper.graph_classification.InfoGraph
        static method), 68
add_args() (cogdl.wrappers.model_wrapper.heterogeneous.Heterogeneous
        static method), 70
add_args() (cogdl.wrappers.model_wrapper.heterogeneous.MultiplexEmbedding
        static method), 71
add_args() (cogdl.wrappers.model_wrapper.link_prediction.GNNKGLink
        static method), 69
add_args() (cogdl.wrappers.model_wrapper.node_classification.CorrectS
        static method), 67
add_args() (cogdl.wrappers.model_wrapper.node_classification.DGIMod
        static method), 64
add_args() (cogdl.wrappers.model_wrapper.node_classification.GCNMix
        static method), 64
add_args() (cogdl.wrappers.model_wrapper.node_classification.GRACEML
        static method), 65
add_args() (cogdl.wrappers.model_wrapper.node_classification.GrandMA
        static method), 65
add_args() (cogdl.wrappers.model_wrapper.node_classification.M3SMo
        static method), 67
add_args() (cogdl.wrappers.model_wrapper.node_classification.NetworkK
        static method), 67
add_args() (cogdl.wrappers.model_wrapper.node_classification.SelfAuxili
        static method), 66
add_args() (cogdl.wrappers.model_wrapper.node_classification.UnsupGr
        static method), 66
add_args() (cogdl.wrappers.model_wrapper.pretraining.GCCModelWrap
        static method), 69
add_args() (cogdl.wrappers.data_wrapper.data_wrapping.DatalWrapper
        cogdl.options), 79
add_args() (cogdl.wrappers.data_wrapper.data_wrapping.DataWithDatal
        cogdl.options), 79
add_model_args() (in module cogdl.options), 79
add_model_DatalWrapper (in module cogdl.options), 79
add_model_HeteroDataWrapper (in module cogdl.options), 79
add_heteroLink_self_loops() (cogdl.data.Adjacency
        method), 16
add_ChainWng_self_loops() (cogdl.data.Graph
        method), 18
add_GenSAGE_DatalWrapper () (in module
        cogdl.utils.graph_utils), 81
add_MoreDataVedges()
        (cogdl.models.nn.compgcn.LinkPredictCompGCN
        method), 72
add_SAGNDatalWrapper
        add_self_loops() (in module cogdl.utils.graph_utils),
        adj_pow_x() (cogdl.layers.mixhop_layer.MixHopLayer
        Adjacency (class in cogdl.data), 16

```

after_pooling_forward()
 (*cogdl.models.nn.diffpool.DiffPool* method), 44

AGC (class in *cogdl.models.nn.agc*), 57

AGCModelWrapper (class in *cogdl.wrappers.model_wrapper.clustering*), 71

alias_draw() (in module *cogdl.utils.utils*), 79

alias_setup() (in module *cogdl.utils.utils*), 79

AmazonDataset (class in *cogdl.datasets.gatne*), 20

apply_to_device() (*cogdl.datasets.gtn_data.GTNDataset* method), 22

apply_to_device() (*cogdl.datasets.han_data.HANDataset* method), 23

ArgClass (class in *cogdl.utils.utils*), 79

AttentionLayer (class in *cogdl.layers.han_layer*), 75

augment() (*cogdl.models.nn.grace.GRACE* method), 47

augment() (*cogdl.models.nn.mvgrl.MVGRL* method), 39

augment() (*cogdl.wrappers.model_wrapper.node_classification.DGIModelWrapperemb.gatne.GATNE* static method), 64

auto_experiment() (in module *cogdl.experiments*), 87

AutoML (class in *cogdl.experiments*), 87

B

BaseEvaluator (class in *cogdl.utils.evaluator*), 80

BaseModel (class in *cogdl.models.base_model*), 28

basis_forward() (*cogdl.layers.rgcn_layer.RGCNLayer* method), 77

Batch (class in *cogdl.data*), 16

batch_graphs() (in module *cogdl.data*), 20

batch_max_pooling() (in module *cogdl.utils.utils*), 79

batch_mean_pooling() (in module *cogdl.utils.utils*), 79

batch_size (*cogdl.data.DataLoader* attribute), 17

batch_sum_pooling() (in module *cogdl.utils.utils*), 79

batched_loss() (*cogdl.models.nn.grace.GRACE* method), 47

batched_loss() (*cogdl.wrappers.model_wrapper.node_classification.GRACEModelWrapper* method), 65

bce_with_logits_loss() (in module *cogdl.utils.evaluator*), 80

BCEWithLogitsLoss (class in *cogdl.utils.evaluator*), 80

bdd_forward() (*cogdl.layers.rgcn_layer.RGCNLayer* method), 77

BlogcatalogDataset (class in *cogdl.datasets.matlab_matrix*), 24

BondEncoder (class in *cogdl.layers.deepergcn_layer*), 73

build_args_from_dict() (in module *cogdl.utils.utils*), 79

build_dataset() (in module *cogdl.datasets*), 28

build_dataset_from_name() (in module *cogdl.datasets*), 28

build_dataset_from_path() (in module *cogdl.datasets*), 28

build_model() (*cogdl.models.nn.patchy_san.PatchySAN* method), 40

build_model() (in module *cogdl.models*), 57

build_model_from_args() (*cogdl.models.base_model.BaseModel* class method), 28

build_model_from_args() (*cogdl.models.emb.deepwalk.DeepWalk* class method), 31

build_model_from_args() (*cogdl.models.emb.dgk.DeepGraphKernel* class method), 32

build_model_from_args() (*cogdl.models.emb.dngr.DNGR* class method), 33

build_model_from_args() (*cogdl.models.emb.dngr.DNGR* class method), 32

build_model_from_args() (*cogdl.models.emb.hin2vec.Hin2vec* class method), 34

build_model_from_args() (*cogdl.models.emb.grarep.GraRep* class method), 33

build_model_from_args() (*cogdl.models.emb.hin2vec.Hin2vec* class method), 30

build_model_from_args() (*cogdl.models.emb.hope.HOPE* class method), 29

build_model_from_args() (*cogdl.models.emb.line.LINE* class method), 37

build_model_from_args() (*cogdl.models.emb.metapath2vec.Metapath2vec* class method), 35

build_model_from_args() (*cogdl.models.emb.netmf.NetMF* class method), 30

build_model_from_args() (*cogdl.models.emb.netsmf.NetSMF* class method), 37

build_model_from_args() (*cogdl.models.emb.node2vec.Node2vec* class method), 36

build_model_from_args() (*cogdl.models.emb.prone.Prone* class method), 38

build_model_from_args() (*cogdl.models.emb.pronepp.ProNEPP* class method), 34

build_model_from_args() (*cogdl.models.emb.pte.PTE* class method), 36

build_model_from_args()

```
(cogdl.models.emb.sdne.SDNE class method), build_model_from_args()
38                                         (cogdl.models.nn.grand.Grand class method),
build_model_from_args()                                         49
(cogdl.models.emb.spectral.Spectral
method), 29
build_model_from_args()                                         class build_model_from_args()
(cogdl.models.nn.agc.AGC   class   method), build_model_from_args()
57                                         (cogdl.models.nn.graph_unet.GraphUnet
class method), 43
build_model_from_args()                                         (cogdl.models.nn.graphsage.Graphsage   class
(cogdl.models.nn.compgcn.LinkPredictCompGCNbuild_model_from_args() (cogdl.models.nn.gtn.GTN
class method), 42                                         class method), 50
build_model_from_args()                                         build_model_from_args()
(cogdl.models.nn.daegc.DAEGC class method), build_model_from_args()
56                                         (cogdl.models.nn.han.HAN   class   method),
build_model_from_args()                                         46
build_model_from_args()                                         build_model_from_args()
(cogdl.models.nn.deepergcn.DeeperGCN
class method), 51                                         (cogdl.models.nn.infograph.InfoGraph   class
build_model_from_args()                                         method), 52
(cogdl.models.nn.dgi.DGIModel class method), build_model_from_args()
39                                         (cogdl.models.nn.mixhop.MixHop   class
build_model_from_args()                                         method), 45
(cogdl.models.nn.diffpool.DiffPool   class
method), 44
build_model_from_args()                                         build_model_from_args()
(cogdl.models.nn.disengcn.DisenGCN   class
method), 53                                         (cogdl.models.nn.mvgrl.MVGRL class method),
39
build_model_from_args()                                         39
(cogdl.models.nn.drgat.DrGAT class method),
51
build_model_from_args()                                         build_model_from_args()
(cogdl.models.nn.drgcn.DrGCN class method),
42
build_model_from_args()                                         build_model_from_args()
(cogdl.models.nn.dropedge_gcn.DropEdge_GCN
class method), 53                                         (cogdl.models.nn.pprgo.PPRGo class method),
48
build_model_from_args() (cogdl.models.nn.gat.GAT   build_model_from_args()
class method), 46                                         (cogdl.models.nn.rgcn.LinkPredictRGCN
build_model_from_args()                                         class method), 50
(cogdl.models.nn.gcn.GCN   class   method), build_model_from_args() (cogdl.models.nn.sgc.sgc
40                                         class method), 54
build_model_from_args()                                         build_model_from_args()
(cogdl.models.nn.gcni.GCNII class method),
45                                         (cogdl.models.nn.sign.MLP   class   method),
45
build_model_from_args()                                         45
(cogdl.models.nn.gcnmix.GCNMix   class
method), 43
build_model_from_args()                                         build_model_from_args()
(cogdl.models.nn.gdc_gcn.GDC_GCN   class
method), 41                                         (cogdl.models.nn.sortpool.SortPool   class
method), 55
build_model_from_args() (cogdl.models.nn.gin.GIN   build_model_from_args()
class method), 48                                         (cogdl.models.nn.unsup_graphsage.SAGE
build_model_from_args()                                         class method), 56
(cogdl.models.nn.grace.GRACE class method),
47
build_topk_ppr_matrix_from_data() (in module
cogdl.utils.ppr_utils), 83
```

<code>build_up()</code> (<i>cogdl.utils.sampling.RandomWalker method</i>), 81	<code>cogdl.layers.gcnii_layer</code> module, 73
C	<code>cogdl.layers.gin_layer</code> module, 73
<code>cal_mrr()</code> (<i>in module cogdl.utils.link_prediction_utils</i>), 82	<code>cogdl.layers.han_layer</code> module, 75
<code>calc_ppr_topk_parallel()</code> (<i>in module cogdl.utils.ppr_utils</i>), 83	<code>cogdl.layers.mixhop_layer</code> module, 78
<code>cat()</code> (<i>in module cogdl.datasets.tu_data</i>), 27	<code>cogdl.layers.mlp_layer</code> module, 76
<code>chebyshev()</code> (<i>cogdl.utils.prone_utils.HeatKernelApproximation method</i>), 83	<code>cogdl.layers.pprgo_layer</code> module, 76
<code>check_app()</code> (<i>in module cogdl.pipelines</i>), 88	<code>cogdl.layers.rgcn_layer</code> module, 77
<code>clear()</code> (<i>cogdl.utils.evaluator.Accuracy method</i>), 80	<code>cogdl.layers.sage_layer</code> module, 72
<code>clear()</code> (<i>cogdl.utils.evaluator.BaseEvaluator method</i>), 80	<code>cogdl.layers.saint_layer</code> module, 78
<code>clone()</code> (<i>cogdl.data.Adjacency method</i>), 16	<code>cogdl.layers.se_layer</code> module, 78
<code>clone()</code> (<i>cogdl.data.Graph method</i>), 18	<code>cogdl.layers.sgc_layer</code> module, 78
<code>cluster_loss()</code> (<i>cogdl.wrappers.model_wrapper.clustering.DAEGCModelWrapper method</i>), 71	<code>cogdl.models</code> module, 57
<code>ClusterWrapper</code> (<i>class in cogdl.wrappers.data_wrapper.node_classification</i>), 58	<code>cogdl.models.base_model</code> module, 28
<code>coalesce()</code> (<i>in module cogdl.datasets.tu_data</i>), 27	<code>cogdl.options</code> module, 79
<code>coalesce()</code> (<i>in module cogdl.utils.graph_utils</i>), 81	<code>cogdl.pipelines</code> module, 87
<code>cogdl.data</code>	<code>cogdl.utils.evaluator</code> module, 80
module, 16	<code>cogdl.utils.graph_utils</code> module, 81
<code>cogdl.datasets</code>	<code>cogdl.utils.link_prediction_utils</code> module, 81
module, 28	<code>cogdl.utils.ppr_utils</code> module, 83
<code>cogdl.datasets.gatne</code>	<code>cogdl.utils.prone_utils</code> module, 83
module, 20	<code>cogdl.utils.sampling</code> module, 80
<code>cogdl.datasets.gcc_data</code>	<code>cogdl.utils.srgcn_utils</code> module, 84
module, 21	<code>cogdl.utils.utils</code> module, 79
<code>cogdl.datasets.gtn_data</code>	<code>col_indices</code> (<i>cogdl.data.Graph property</i>), 18
module, 22	<code>col_norm()</code> (<i>cogdl.data.Adjacency method</i>), 16
<code>cogdl.datasets.han_data</code>	<code>col_norm()</code> (<i>cogdl.data.Graph method</i>), 18
module, 23	<code>CollabDataset</code> (<i>class in cogdl.datasets.tu_data</i>), 26
<code>cogdl.datasets.kg_data</code>	<code>collate_fn()</code> (<i>cogdl.data.DataLoader static method</i>), 17
module, 23	<code>ColumnUniform</code> (<i>class in cogdl.utils.srgcn_utils</i>), 84
<code>cogdl.datasets.matlab_matrix</code>	
module, 24	
<code>cogdl.datasets.ogb</code>	
module, 25	
<code>cogdl.datasets.tu_data</code>	
module, 26	
<code>cogdl.experiments</code>	
module, 87	
<code>cogdl.layers.deepergcn_layer</code>	
module, 73	
<code>cogdl.layers.disengcn_layer</code>	
module, 75	
<code>cogdl.layers.gat_layer</code>	
module, 72	
<code>cogdl.layers.gcn_layer</code>	
module, 72	

compute_intra() (*cogdl.models.nn.agc.AGC method*), 57
concat() (*cogdl.utils.link_prediction_utils.ConvELayer method*), 82
consistency_loss() (*cogdl.wrappers.model_wrapper.node_classification method*), 65
construct_sparse() (*in module cogdl.utils.ppr_utils*), 83
contrastive_loss() (*cogdl.models.nn.grace.GRACE method*), 47
contrastive_loss() (*cogdl.wrappers.model_wrapper.node_classification method*), 65
ConvELayer (*class in cogdl.utils.link_prediction_utils*), 81
convert_csr() (*cogdl.data.Adjacency method*), 16
coo2csc() (*in module cogdl.utils.graph_utils*), 81
coo2csr() (*in module cogdl.utils.graph_utils*), 81
coo2csr_index() (*in module cogdl.utils.graph_utils*), 81
CorrectSmoothModelWrapper (*class in cogdl.wrappers.model_wrapper.node_classification*), 67
cross_entropy_loss() (*in module cogdl.utils.evaluator*), 80
CrossEntropyLoss (*class in cogdl.utils.evaluator*), 80
csr2coo() (*in module cogdl.utils.graph_utils*), 81
csr2csc() (*in module cogdl.utils.graph_utils*), 81
csr_subgraph() (*cogdl.data.Graph method*), 18
cumsum() (*cogdl.data.Batch method*), 16
cycle_index() (*in module cogdl.utils.utils*), 79

D

DAEGC (*class in cogdl.models.nn.daegc*), 56
DAEGCModelWrapper (*class in cogdl.wrappers.model_wrapper.clustering*), 71
DataLoader (*class in cogdl.data*), 17
Dataset (*class in cogdl.data*), 17
dataset (*cogdl.data.DataLoader attribute*), 17
DatasetPipeline (*class in cogdl.pipelines*), 87
DatasetStatsPipeline (*class in cogdl.pipelines*), 87
DatasetVisualPipeline (*class in cogdl.pipelines*), 87
DBLP_GTNDataset (*class in cogdl.datasets.gtn_data*), 22
DBLP_HANDataset (*class in cogdl.datasets.han_data*), 23
DblpNEDataset (*class in cogdl.datasets.matlab_matrix*), 24
DeeperGCN (*class in cogdl.models.nn.deepergcn*), 50
DeepGraphKernel (*class in cogdl.models.emb.dgk*), 32
DeepWalk (*class in cogdl.models.emb.deepwalk*), 30
default_search_space() (*in module cogdl.experiments*), 87
degrees() (*cogdl.data.Adjacency method*), 16
degrees() (*cogdl.data.Graph method*), 18
device (*cogdl.data.Adjacency property*), 16
device (*cogdl.data.Graph property*), 18
device (*cogdl.models.base_model.BaseModel property*), 28
DGIModel (*class in cogdl.models.nn.dgi*), 39
~~DGIModelWrapper and ModelWrapper~~ *in cogdl.wrappers.model_wrapper.node_classification*, 64
DiffPool (*class in cogdl.models.nn.diffpool*), 43
DisenGCN (*class in cogdl.models.nn.disengcn*), 53
DisenGCNLayer (*class in cogdl.layers.disengcn_layer*), 75
GRACEModelWrapper (*class in cogdl.utils.link_prediction_utils*), 82
DNGR (*class in cogdl.models.emb.dngr*), 33
download() (*cogdl.data.Dataset method*), 18
download() (*cogdl.datasets.gatne.GatneDataset method*), 20
download() (*cogdl.datasets.gcc_data.EdgeList method*), 21
download() (*cogdl.datasets.gcc_data.GCCDataset method*), 21
download() (*cogdl.datasets.gtn_data.GTNDataset method*), 22
download() (*cogdl.datasets.han_data.HANDataset method*), 23
download() (*cogdl.datasets.kg_data.KnowledgeGraphDataset method*), 23
download() (*cogdl.datasets.matlab_matrix.MatlabMatrix method*), 24
download() (*cogdl.datasets.matlab_matrix.NetworkEmbeddingCMTYDataset method*), 25
download() (*cogdl.datasets.tu_data.TUDataset method*), 27
download_url() (*in module cogdl.utils.utils*), 79
DrGAT (*class in cogdl.models.nn.drgat*), 51
DrGCN (*class in cogdl.models.nn.drgcn*), 42
drop_adj() (*cogdl.models.nn.grace.GRACE method*), 47
drop_feature() (*cogdl.models.nn.grace.GRACE method*), 47
drop_last (*cogdl.data.DataLoader attribute*), 17
drop_node() (*cogdl.models.nn.grand.Grand method*), 49
DropEdge_GCN (*class in cogdl.models.nn.dropedge_gcn*), 52

E

edge_attr (*cogdl.data.Graph property*), 18
edge_attr_size (*cogdl.data.Dataset property*), 18
edge_attr_size (*cogdl.datasets.ogb.OCBProteinsDataset property*), 26
edge_index (*cogdl.data.Adjacency property*), 16
edge_index (*cogdl.data.Graph property*), 18
edge_subgraph() (*cogdl.data.Graph method*), 18

`edge_types (cogdl.data.Graph property)`, 19
`edge_weight (cogdl.data.Graph property)`, 19
`EdgeAttention (class in cogdl.utils.srgcn_utils)`, 84
`EdgeEncoder (class in cogdl.layers.deepergcn_layer)`, 74
`Edgelist (class in cogdl.datasets.gcc_data)`, 21
`embed() (cogdl.models.nn.dgi.DGIModel method)`, 39
`embed() (cogdl.models.nn.gcn.GCN method)`, 40
`embed() (cogdl.models.nn.grace.GRACE method)`, 47
`embed() (cogdl.models.nn.mvgrl.MVGRL method)`, 39
`embed() (cogdl.models.nn.unsup_graphsage.SAGE method)`, 56
`EmbeddingLinkPredictionDataWrapper (class in cogdl.wrappers.data_wrapper.link_prediction)`, 62
`EmbeddingLinkPredictionModelWrapper (class in cogdl.wrappers.model_wrapper.link_prediction)`, 69
`ENZYMES (class in cogdl.datasets.tu_data)`, 26
`eval() (cogdl.data.Graph method)`, 19
`eval_step() (cogdl.wrappers.model_wrapper.link_prediction method)`, 69
`evaluate() (cogdl.utils.evaluator.Accuracy method)`, 80
`evaluate() (cogdl.utils.evaluator.BaseEvaluator method)`, 80
`experiment() (in module cogdl.experiments)`, 87

F

`FB13Dataset (class in cogdl.datasets.kg_data)`, 23
`FB13SDataset (class in cogdl.datasets.kg_data)`, 23
`FB15k237Dataset (class in cogdl.datasets.kg_data)`, 23
`FB15kDataset (class in cogdl.datasets.kg_data)`, 23
`feature_extractor() (cogdl.models.emb.dgk.DeepGraphKernel static method)`, 32
`feature_extractor() (cogdl.models.emb.graph2vec.Graph2Vec static method)`, 34
`FlickrDataset (class in cogdl.datasets.matlab_matrix)`, 24
`forward() (cogdl.layers.deepergcn_layer.BondEncoder method)`, 74
`forward() (cogdl.layers.deepergcn_layer.EdgeEncoder method)`, 74
`forward() (cogdl.layers.deepergcn_layer.GENConv method)`, 74
`forward() (cogdl.layers.deepergcn_layer.ResGNNLayer method)`, 75
`forward() (cogdl.layers.disengcn_layer.DisenGCNLayer method)`, 75
`forward() (cogdl.layers.gat_layer.GATLayer method)`, 72
`forward() (cogdl.layers.gcn_layer.GCNLayer method)`, 72
`forward() (cogdl.layers.gcnii_layer.GCNIILayer method)`, 73
`forward() (cogdl.layers.gin_layer.GINLayer method)`, 73
`forward() (cogdl.layers.han_layer.AttentionLayer method)`, 75
`forward() (cogdl.layers.han_layer.HANLayer method)`, 76
`forward() (cogdl.layers.mixhop_layer.MixHopLayer method)`, 78
`forward() (cogdl.layers.mlp_layer.MLP method)`, 76
`forward() (cogdl.layers.pprgo_layer.LinearLayer method)`, 76
`forward() (cogdl.layers.pprgo_layer.PPRGoLayer method)`, 77
`forward() (cogdl.layers.rgcn_layer.RGCNLayer method)`, 77
`forward() (cogdl.layers.sage_layer.SAGELayer method)`, 73
~~`forward() (cogdl.layers.saint_layer.SAINTLayer method)`~~, 73
`forward() (cogdl.layers.se_layer.SElayer method)`, 78
`forward() (cogdl.layers.sgc_layer.SGCLayer method)`, 78
`forward() (cogdl.models.base_model.BaseModel method)`, 28
`forward() (cogdl.models.emb.deepwalk.DeepWalk method)`, 31
`forward() (cogdl.models.emb.dgk.DeepGraphKernel method)`, 32
`forward() (cogdl.models.emb.dngr.DNGR method)`, 33
`forward() (cogdl.models.emb.gatne.GATNE method)`, 32
`forward() (cogdl.models.emb.graph2vec.Graph2Vec method)`, 34
`forward() (cogdl.models.emb.grarep.GraRep method)`, 33
`forward() (cogdl.models.emb.hin2vec.Hin2vec method)`, 30
`forward() (cogdl.models.emb.hope.HOPE method)`, 29
`forward() (cogdl.models.emb.line.LINE method)`, 37
`forward() (cogdl.models.emb.metapath2vec.Metapath2vec method)`, 35
`forward() (cogdl.models.emb.netmf.NetMF method)`, 30
`forward() (cogdl.models.emb.netsmf.NetSMF method)`, 37
`forward() (cogdl.models.emb.node2vec.Node2vec method)`, 36
`forward() (cogdl.models.emb.prone.ProNE method)`, 38
`forward() (cogdl.models.emb.pte.PTE method)`, 36
`forward() (cogdl.models.emb.sdne.SDNE method)`, 38
`forward() (cogdl.models.emb.spectral.Spectral method)`, 29
`forward() (cogdl.models.nn.agc.AGC method)`, 57

forward() (*cogdl.models.nn.compgcn.LinkPredictCompGCN method*), 42
forward() (*cogdl.models.nn.daegc.DAEGC method*), 56
forward() (*cogdl.models.nn.deepergcn.DeeperGCN method*), 51
forward() (*cogdl.models.nn.dgi.DGIModel method*), 39
forward() (*cogdl.models.nn.diffpool.DiffPool method*), 44
forward() (*cogdl.models.nn.disengcn.DisenGCN method*), 53
forward() (*cogdl.models.nn.drgat.DrGAT method*), 51
forward() (*cogdl.models.nn.drgcn.DrGCN method*), 42
forward() (*cogdl.models.nn.dropedge_gcn.DropEdge_GCN method*), 53
forward() (*cogdl.models.nn.gat.GAT method*), 46
forward() (*cogdl.models.nn.gcn.GCN method*), 40
forward() (*cogdl.models.nn.gcnii.GCNII method*), 45
forward() (*cogdl.models.nn.gcnmix.GCNMix method*), 43
forward() (*cogdl.models.nn.gdc_gcn.GDC_GCN method*), 41
forward() (*cogdl.models.nn.gin.GIN method*), 48
forward() (*cogdl.models.nn.grace.GRACE method*), 47
forward() (*cogdl.models.nn.grand.Grand method*), 49
forward() (*cogdl.models.nn.graph_unet.GraphUnet method*), 43
forward() (*cogdl.models.nn.graphsage.Graphsage method*), 42
forward() (*cogdl.models.nn.gtn.GTN method*), 50
forward() (*cogdl.models.nn.han.HAN method*), 46
forward() (*cogdl.models.nn.infograph.InfoGraph method*), 52
forward() (*cogdl.models.nn.mixhop.MixHop method*), 46
forward() (*cogdl.models.nn.mlp.MLP method*), 54
forward() (*cogdl.models.nn.mvgrl.MVGRL method*), 39
forward() (*cogdl.models.nn.patchy_san.PatchySAN method*), 40
forward() (*cogdl.models.nn.pppnp.PPPNP method*), 47
forward() (*cogdl.models.nn.pprgo.PPRGo method*), 48
forward() (*cogdl.models.nn.rgcn.LinkPredictRGCN method*), 50
forward() (*cogdl.models.nn.sgc.sgc method*), 54
forward() (*cogdl.models.nn.sign.MLP method*), 45
forward() (*cogdl.models.nn.sortpool.SortPool method*), 55
forward() (*cogdl.models.nn.srgcn.SRGCN method*), 55
forward() (*cogdl.models.nn.unsup_graphsage.SAGE method*), 56
forward() (*cogdl.utils.link_prediction_utils.ConvELayer method*), 82
forward() (*cogdl.utils.link_prediction_utils.DistMultLayer method*), 82
forward() (*cogdl.utils.link_prediction_utils.GNNLinkPredict method*), 82
forward() (*cogdl.utils.srgcn_utils.ColumnUniform method*), 84
forward() (*cogdl.utils.srgcn_utils.EdgeAttention method*), 84
forward() (*cogdl.utils.srgcn_utils.Gaussian method*), 84
forward() (*cogdl.utils.srgcn_utils.HeatKernel method*), 85
forward() (*cogdl.utils.srgcn_utils.Identity method*), 85
forward() (*cogdl.utils.srgcn_utils.NodeAttention method*), 85
forward() (*cogdl.utils.srgcn_utils.NormIdentity method*), 85
forward() (*cogdl.utils.srgcn_utils.PPR method*), 86
forward() (*cogdl.utils.srgcn_utils.RowSoftmax method*), 86
forward() (*cogdl.utils.srgcn_utils.RowUniform method*), 86
forward() (*cogdl.utils.srgcn_utils.SymmetryNorm method*), 86
forward_aux() (*cogdl.models.nn.gcnmix.GCNMix method*), 43
from_data_list() (*cogdl.data.Batch static method*), 17
from_dict() (*cogdl.data.Adjacency static method*), 16
from_dict() (*cogdl.data.Graph static method*), 19
from_pyg_data() (*cogdl.data.Graph static method*), 19
FullBatchNodeClfDataWrapper (*class in cogdl.wrappers.data_wrapper.node_classification*), 59

G

GAEModelWrapper (*class in cogdl.wrappers.model_wrapper.clustering*), 71
GAT (*class in cogdl.models.nn.gat*), 46
GATLayer (*class in cogdl.layers.gat_layer*), 72
GATNE (*class in cogdl.models.emb.gatne*), 31
GatneDataset (*class in cogdl.datasets.gatne*), 20
Gaussian (*class in cogdl.utils.prone_utils*), 83
Gaussian (*class in cogdl.utils.srgcn_utils*), 84
GCCDataset (*class in cogdl.datasets.gcc_data*), 21
GCCDataWrapper (*class in cogdl.wrappers.data_wrapper.pretraining*), 62
GCCModelWrapper (*class in cogdl.wrappers.model_wrapper.pretraining*), 69
GCN (*class in cogdl.models.nn.gcn*), 40
GCNII (*class in cogdl.models.nn.gcnii*), 44
GCNIIILayer (*class in cogdl.layers.gcnii_layer*), 73
GCNLayer (*class in cogdl.layers.gcn_layer*), 72
GCNMix (*class in cogdl.models.nn.gcnmix*), 43
GCNMixModelWrapper (*class in cogdl.wrappers.model_wrapper.node_classification*),

64
GDC_GCN (*class in cogdl.models.nn.gdc_gcn*), 41
gen_variants() (*in module cogdl.experiments*), 87
GENConv (*class in cogdl.layers.deepergcn_layer*), 74
generate_normalization() (*cogdl.data.Adjacency method*), 16
generate_virtual_labels()
 (*cogdl.wrappers.model_wrapper.node_classification.SelfAuxiliaryMatlabWrapper* method), 66
GenerateEmbeddingPipeline (*class in cogdl.pipelines*), 87
get() (*cogdl.data.Dataset method*), 18
get() (*cogdl.data.MultiGraphDataset method*), 20
get() (*cogdl.datasets.gatne.GatneDataset method*), 20
get() (*cogdl.datasets.gcc_data.EdgeList method*), 21
get() (*cogdl.datasets.gcc_data.GCCDataset method*), 21
get() (*cogdl.datasets.gtn_data.GTNDataset method*), 22
get() (*cogdl.datasets.han_data.HANDataset method*), 23
get() (*cogdl.datasets.kg_data.KnowledgeGraphDataset method*), 24
get() (*cogdl.datasets.matlab_matrix.MatlabMatrix method*), 24
get() (*cogdl.datasets.matlab_matrix.NetworkEmbeddingCMatrix method*), 25
get() (*cogdl.datasets.ogb.OGBGDataset method*), 25
get() (*cogdl.datasets.ogb.OGBDataset method*), 26
get_2hop() (*cogdl.models.nn.daegc.DAEGC method*), 56
get_activation() (*in module cogdl.utils.utils*), 79
get_cluster_center()
 (*cogdl.models.nn.daegc.DAEGC method*), 56
get_dataset() (*cogdl.wrappers.data_wrapper.node_classification.MS2DataWrapper* method), 59
get_default_args() (*in module cogdl.options*), 79
get_degrees() (*in module cogdl.utils.graph_utils*), 81
get_denoised_matrix()
 (*cogdl.models.emb.dngr.DNGR method*), 33
get_diff_args() (*in module cogdl.options*), 79
get_display_data_parser() (*in module cogdl.options*), 79
get_download_data_parser() (*in module cogdl.options*), 79
get_edge_set() (*cogdl.utils.link_prediction_utils.GNNLinkPredict method*), 82
get_emb() (*cogdl.models.emb.dngr.DNGR method*), 34
get_embedding_dense() (*in module cogdl.utils.prone_utils*), 84
get_evaluator() (*cogdl.data.Dataset method*), 18
get_evaluator() (*cogdl.datasets.ogb.OGBDataset method*), 26
get_evaluator() (*cogdl.datasets.ogb.OGBProteinsDataset method*), 26
get_features() (*cogdl.models.nn.daegc.DAEGC method*), 56
get_filtered_rank() (*in module cogdl.utils.link_prediction_utils*), 82
get_link_labels() (*cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPredictionDataWrapper* method), 70
get_loader() (*cogdl.datasets.ogb.OGBGDataset method*), 25
get_loss_fn() (*cogdl.data.Dataset method*), 18
get_loss_fn() (*cogdl.datasets.ogb.OGBDataset method*), 26
get_loss_fn() (*cogdl.datasets.ogb.OGBProteinsDataset method*), 26
get_memory_usage() (*in module cogdl.utils.utils*), 79
get_norm_layer() (*in module cogdl.utils.utils*), 79
get_optimizer() (*cogdl.models.nn.gcnii.GCNII method*), 45
get_parameters() (*cogdl.data.DataLoader method*), 17
get_parser() (*in module cogdl.options*), 79
get_ppmi_matrix() (*cogdl.models.emb.dngr.DNGR method*), 34
get_pmi_rank() (*in module cogdl.utils.link_prediction_utils*), 82
get_raw_rank() (*in module cogdl.utils.link_prediction_utils*), 82
get_subset() (*cogdl.datasets.ogb.OGBGDataset method*), 25
get_train_dataset()
 (*cogdl.wrappers.data_wrapper.node_classification.ClusterWrapper method*), 58
get_train_dataset()
 (*cogdl.wrappers.data_wrapper.node_classification.GraphSAGEDataWrapper method*), 58
get_training_parser() (*in module cogdl.options*), 79
get_weight() (*cogdl.data.Adjacency method*), 16
getP() (*cogdl.wrappers.model_wrapper.clustering.DAEGCModelWrapper method*), 71
getQ() (*cogdl.wrappers.model_wrapper.clustering.DAEGCModelWrapper method*), 71
GIN (*class in cogdl.models.nn.gin*), 48
GINLayer (*class in cogdl.layers.gin_layer*), 73
GNNKGLinkPredictionDataWrapper (*class in cogdl.wrappers.data_wrapper.link_prediction*), 62
GNNKGLinkPredictionModelWrapper (*class in cogdl.wrappers.model_wrapper.link_prediction*), 69
GNNLinkPredict (*class in cogdl.utils.link_prediction_utils*), 82
GNNLinkPredictionDataWrapper (*class in cogdl.wrappers.data_wrapper.link_prediction*),

63
GNNLinkPredictionModelWrapper (class in cogdl.wrappers.model_wrapper.link_prediction), 70
GRACE (class in cogdl.models.nn.grace), 47
GRACEModelWrapper (class in cogdl.wrappers.model_wrapper.node_classification), 65
Grand (class in cogdl.models.nn.grand), 49
GrandModelWrapper (class in cogdl.wrappers.model_wrapper.node_classification), 65
Graph (class in cogdl.data), 18
Graph2Vec (class in cogdl.models.emb.graph2vec), 34
graph_classificatoin_loss() (cogdl.models.nn.diffpool.DiffPool method), 44
GraphClassificationDataWrapper (class in cogdl.wrappers.data_wrapper.graph_classification), 60
GraphClassificationModelWrapper (class in cogdl.wrappers.model_wrapper.graph_classification), 68
GraphEmbeddingDataWrapper (class in cogdl.wrappers.data_wrapper.graph_classification), 61
GraphEmbeddingModelWrapper (class in cogdl.wrappers.model_wrapper.graph_classification), 68
Graphsage (class in cogdl.models.nn.graphsage), 41
GraphSAGEDataWrapper (class in cogdl.wrappers.data_wrapper.node_classification), 58
GraphSAGEModelWrapper (class in cogdl.wrappers.model_wrapper.node_classification), 66
GraphUnet (class in cogdl.models.nn.graph_unet), 43
GraRep (class in cogdl.models.emb.grarep), 33
GTN (class in cogdl.models.nn.gtn), 50
GTNDataset (class in cogdl.datasets.gtn_data), 22

H

HAN (class in cogdl.models.nn.han), 46
HANDataset (class in cogdl.datasets.han_data), 23
HANLayer (class in cogdl.layers.han_layer), 75
HeatKernel (class in cogdl.utils.prone_utils), 83
HeatKernel (class in cogdl.utils.srgcn_utils), 85
HeatKernelApproximation (class in cogdl.utils.prone_utils), 83
HeterogeneousEmbeddingDataWrapper (class in cogdl.wrappers.data_wrapper.heterogeneous), 63
HeterogeneousEmbeddingModelWrapper (class in cogdl.wrappers.model_wrapper.heterogeneous), 70

HeterogeneousGNNDataset (class in cogdl.wrappers.data_wrapper.heterogeneous), 63
HeterogeneousGNNModelWrapper (class in cogdl.wrappers.model_wrapper.heterogeneous), 70

Hin2vec (class in cogdl.models.emb.hin2vec), 29
HOPE (class in cogdl.models.emb.hope), 29

I

Identity (class in cogdl.utils.srgcn_utils), 85
identity_act() (in module cogdl.utils.utils), 80
IMDB_GTNdataset (class in cogdl.datasets.gtn_data), 22
IMDB_HANDataset (class in cogdl.datasets.han_data), 23
ImdbBinaryDataset (class in cogdl.datasets.tu_data), 26
ImdbMultiDataset (class in cogdl.datasets.tu_data), 26
in_norm (cogdl.data.Graph property), 19

J

inference() (cogdl.models.nn.graphsage.Graphsage method), 42
InfoGraph (class in cogdl.models.nn.infograph), 52
InfoGraphDataWrapper (class in cogdl.wrappers.data_wrapper.graph_classification), 61
InfoGraphModelWrapper (class in cogdl.wrappers.model_wrapper.graph_classification), 68

is_inductive() (cogdl.data.Graph method), 19
is_symmetric() (cogdl.data.Adjacency method), 16
is_symmetric() (cogdl.data.Graph method), 19

K

KDD_ICDM_GCCDataset (class in cogdl.datasets.gcc_data), 21
keys (cogdl.data.Adjacency property), 16
keys (cogdl.data.Graph property), 19
KnowledgeGraphDataset (class in cogdl.datasets.kg_data), 23

L

len() (cogdl.data.MultiGraphDataset method), 20
LINE (class in cogdl.models.emb.line), 37
LinearLayer (class in cogdl.layers.pprgo_layer), 76
LinkPredictCompGCN (class in cogdl.models.nn.compgcn), 42
LinkPredictRGCN (class in cogdl.models.nn.rgcn), 50
load_checkpoint() (cogdl.wrappers.model_wrapper.pretraining.GCCM method), 69
local_graph() (cogdl.data.Graph method), 19
loss() (cogdl.models.nn.compgcn.LinkPredictCompGCN method), 42
loss() (cogdl.models.nn.mvgrl.MVGRL method), 39

`loss()` (*cogdl.models.nn.rgcn.LinkPredictRGCN method*), 50

M

`M3SDDataWrapper` (*class in cogdl.wrappers.data_wrapper.node_classification*), 58

`M3SModelWrapper` (*class in cogdl.wrappers.model_wrapper.node_classification*), 66

`makedirs()` (*in module cogdl.utils.utils*), 80

`mask2nid()` (*cogdl.data.Graph method*), 19

`MatlabMatrix` (*class in cogdl.datasets.matlab_matrix*), 24

`max_degree` (*cogdl.data.Dataset property*), 18

`max_degree` (*cogdl.data.MultiGraphDataset property*), 20

`max_graph_size` (*cogdl.data.Dataset property*), 18

`max_graph_size` (*cogdl.data.MultiGraphDataset property*), 20

`MaxAggregator` (*class in cogdl.layers.sage_layer*), 72

`MeanAggregator` (*class in cogdl.layers.sage_layer*), 73

`message_norm()` (*cogdl.layers.deepergcn_layer.GENConv method*), 74

`Metapath2vec` (*class in cogdl.models.emb.metapath2vec*), 34

`mi_loss()` (*cogdl.wrappers.model_wrapper.graph_classification.InfoGraphModelWrapper.heterogeneous*, *static method*), 68

`mini_forward()` (*cogdl.models.nn.graphsage.Graphsage method*), 42

`MixHop` (*class in cogdl.models.nn.mixhop*), 45

`MixHopLayer` (*class in cogdl.layers.mixhop_layer*), 78

`MLP` (*class in cogdl.layers.mlp_layer*), 76

`MLP` (*class in cogdl.models.nn.mlp*), 53

`MLP` (*class in cogdl.models.nn.sign*), 45

`module`

- `cogdl.data`, 16
- `cogdl.datasets`, 28
- `cogdl.datasets.gatne`, 20
- `cogdl.datasets.gcc_data`, 21
- `cogdl.datasets.gtn_data`, 22
- `cogdl.datasets.han_data`, 23
- `cogdl.datasets.kg_data`, 23
- `cogdl.datasets.matlab_matrix`, 24
- `cogdl.datasets.ogb`, 25
- `cogdl.datasets.tu_data`, 26
- `cogdl.experiments`, 87
- `cogdl.layers.deepergcn_layer`, 73
- `cogdl.layers.disengcn_layer`, 75
- `cogdl.layers.gat_layer`, 72
- `cogdl.layers.gcn_layer`, 72
- `cogdl.layers.gcnii_layer`, 73
- `cogdl.layers.gin_layer`, 73
- `cogdl.layers.han_layer`, 75

`cogdl.layers.mixhop_layer`, 78

`cogdl.layers.mlp_layer`, 76

`cogdl.layers.pprgo_layer`, 76

`cogdl.layers.rgcn_layer`, 77

`cogdl.layers.sage_layer`, 72

`cogdl.layers.saint_layer`, 78

`cogdl.layers.se_layer`, 78

`cogdl.layers.sgc_layer`, 78

`cogdl.models`, 57

`cogdl.models.base_model`, 28

`cogdl.options`, 79

`cogdl.pipelines`, 87

`cogdl.utils.evaluator`, 80

`cogdl.utils.graph_utils`, 81

`cogdl.utils.link_prediction_utils`, 81

`cogdl.utils.ppr_utils`, 83

`cogdl.utils.prone_utils`, 83

`cogdl.utils.sampling`, 80

`cogdl.utils.srgcn_utils`, 84

`cogdl.utils.utils`, 79

`multiclass_f1()` (*in module cogdl.utils.evaluator*), 80

`MultiClassMicroF1` (*class in cogdl.utils.evaluator*), 80

`MultiGraphDataset` (*class in cogdl.data*), 20

`multilabel_f1()` (*in module cogdl.utils.evaluator*), 80

`MultiLabelMicroF1` (*class in cogdl.utils.evaluator*), 80

`MultiplexEmbeddingDataWrapper` (*class in cogdl.wrappers.model_wrapper.heterogeneous*), 64

`MultiplexEmbeddingModelWrapper` (*class in cogdl.wrappers.model_wrapper.heterogeneous*), 71

`MUTAGDataset` (*class in cogdl.datasets.tu_data*), 26

`MVGRL` (*class in cogdl.models.nn.mvgrl*), 39

`MVGRLModelWrapper` (*class in cogdl.wrappers.model_wrapper.node_classification*), 65

N

`NCI109Dataset` (*class in cogdl.datasets.tu_data*), 27

`NCI1Dataset` (*class in cogdl.datasets.tu_data*), 27

`negative_edge_sampling()` (*in module cogdl.utils.graph_utils*), 81

`NetMF` (*class in cogdl.models.emb.netmf*), 30

`NetSMF` (*class in cogdl.models.emb.netsmf*), 36

`NetworkEmbeddingCMTYDataset` (*class in cogdl.datasets.matlab_matrix*), 25

`NetworkEmbeddingDataWrapper` (*class in cogdl.wrappers.data_wrapper.node_classification*), 59

`NetworkEmbeddingModelWrapper` (*class in cogdl.wrappers.model_wrapper.node_classification*), 67

`Node2vec` (*class in cogdl.models.emb.node2vec*), 35

NodeAdaptiveEncoder (class in `cogdl.utils.prone_utils`), 83
NodeAttention (class in `cogdl.utils.srgcn_utils`), 85
NodeClfModelWrapper (class in `cogdl.wrappers.model_wrapper.node_classification`), 67
nodes() (`cogdl.data.Graph` method), 19
norm() (`cogdl.models.nn.gtn.GTN` method), 50
normalization() (`cogdl.models.nn.gtn.GTN` method), 50
normalize() (`cogdl.data.Graph` method), 19
normalize_adj() (`cogdl.data.Adjacency` method), 16
normalize_feature() (in module `cogdl.datasets.tu_data`), 27
normalize_x() (`cogdl.models.nn.grand.Grand` method), 49
NormIdentity (class in `cogdl.utils.srgcn_utils`), 85
num_classes (`cogdl.data.Dataset` property), 18
num_classes (`cogdl.data.Graph` property), 19
num_classes (`cogdl.data.MultiGraphDataset` property), 20
num_classes (`cogdl.datasets.gcc_data.EdgeList` property), 21
num_classes (`cogdl.datasets.gtn_data.GTNDataset` property), 22
num_classes (`cogdl.datasets.han_data.HANDataset` property), 23
num_classes (`cogdl.datasets.matlab_matrix.MatlabMatrix` property), 24
num_classes (`cogdl.datasets.matlab_matrix.NetworkEmbeddingCMTYDataset` property), 25
num_classes (`cogdl.datasets.ogb.OGBGDataset` property), 25
num_classes (`cogdl.datasets.tu_data.TUDataset` property), 27
num_edge_attributes() (in module `cogdl.datasets.tu_data`), 27
num_edge_labels() (in module `cogdl.datasets.tu_data`), 27
num_edges (`cogdl.data.Adjacency` property), 16
num_edges (`cogdl.data.Graph` property), 19
num_entities (`cogdl.datasets.kg_data.KnowledgeGraphDataset` property), 24
num_features (`cogdl.data.Dataset` property), 18
num_features (`cogdl.data.Graph` property), 19
num_features (`cogdl.data.MultiGraphDataset` property), 20
num_graphs (`cogdl.data.Batch` property), 17
num_graphs (`cogdl.data.Dataset` property), 18
num_graphs (`cogdl.data.MultiGraphDataset` property), 20
num_node_attributes() (in module `cogdl.datasets.tu_data`), 27
num_node_labels() (in module `cogdl.datasets.tu_data`), 27
in `cogdl.datasets.tu_data`), 27
num_nodes (`cogdl.data.Adjacency` property), 16
num_nodes (`cogdl.data.Graph` property), 19
in `cogdl.datasets.matlab_matrix.MatlabMatrix` property), 25
num_nodes (`cogdl.datasets.matlab_matrix.NetworkEmbeddingCMTYDataset` property), 25
num_relations (`cogdl.datasets.kg_data.KnowledgeGraphDataset` property), 24
num_workers (`cogdl.data.DataLoader` attribute), 17

O

OAGBERTInferencePipeline (class in `cogdl.pipelines`), 87
OGBArxivDataset (class in `cogdl.datasets.ogb`), 25
OGBCodeDataset (class in `cogdl.datasets.ogb`), 25
OGBGDataset (class in `cogdl.datasets.ogb`), 25
OGBMolbaceDataset (class in `cogdl.datasets.ogb`), 26
OGBMolhivDataset (class in `cogdl.datasets.ogb`), 26
OGBMolpcbaDataset (class in `cogdl.datasets.ogb`), 26
OGBNDataset (class in `cogdl.datasets.ogb`), 26
OGBPapers100MDataset (class in `cogdl.datasets.ogb`), 26
OGBPpaDataset (class in `cogdl.datasets.ogb`), 26
OGBProductsDataset (class in `cogdl.datasets.ogb`), 26
OGBProteinsDataset (class in `cogdl.datasets.ogb`), 26
out_norm (`cogdl.data.Graph` property), 19
output_results() (in module `cogdl.experiments`), 87

P

padding_self_loops() (`cogdl.data.Adjacency` method), 16
padding_self_loops() (`cogdl.data.Graph` method), 19
parse_args_and_arch() (in module `cogdl.options`), 79
parse_txt_array() (in module `cogdl.datasets.tu_data`), 27
PATCHY_SAN_DataWrapper (class in `cogdl.wrappers.data_wrapper.graph_classification`), 61
PatchySAN (class in `cogdl.models.nn.patchy_san`), 40
pin_memory (`cogdl.data.DataLoader` attribute), 17
Pipeline (class in `cogdl.pipelines`), 87
pipeline() (in module `cogdl.pipelines`), 88
post_stage() (`cogdl.wrappers.data_wrapper.node_classification.M3SDa` method), 59
post_stage() (`cogdl.wrappers.model_wrapper.clustering.DAEGCMModel` method), 71
post_stage() (`cogdl.wrappers.model_wrapper.pretraining.GCCModelWr` method), 69
post_stage_wrapper() (`cogdl.wrappers.data_wrapper.node_classification.SAGNDataWr` method), 60
PPIDataset (class in `cogdl.datasets.matlab_matrix`), 25

PPNP (*class in cogdl.models.nn.pppnp*), 47
 PPR (*class in cogdl.utils.prone_utils*), 84
 PPR (*class in cogdl.utils.srgcn_utils*), 86
 ppr_topk() (*in module cogdl.utils.ppr_utils*), 83
 PPRGo (*class in cogdl.models.nn.pprgo*), 48
 PPRGoDataWrapper (*class in cogdl.wrappers.data_wrapper.node_classification*), 59
 PPRGoLayer (*class in cogdl.layers.pprgo_layer*), 77
 PPRGoModelWrapper (*class in cogdl.wrappers.model_wrapper.node_classification*), 68
 pre_stage() (*cogdl.wrappers.data_wrapper.node_classification*), 59
 pre_stage() (*cogdl.wrappers.data_wrapper.node_classification*), 60
 pre_stage() (*cogdl.wrappers.model_wrapper.clustering*), 71
 pre_stage() (*cogdl.wrappers.model_wrapper.clustering*), 72
 pre_stage() (*cogdl.wrappers.model_wrapper.node_classification*), 67
 pre_stage() (*cogdl.wrappers.model_wrapper.node_classification*), 68
 pre_stage() (*cogdl.wrappers.model_wrapper.node_classification*), 66
 pre_stage() (*cogdl.wrappers.model_wrapper.pretraining*), 69
 pre_stage_transform() (*cogdl.wrappers.data_wrapper.node_classification*), 60
 pre_transform() (*cogdl.wrappers.data_wrapper.graph_classification*), 61
 pre_transform() (*cogdl.wrappers.data_wrapper.graph_classification*), 61
 pre_transform() (*cogdl.wrappers.data_wrapper.link_prediction*), 62
 pre_transform() (*cogdl.wrappers.data_wrapper.link_prediction*), 63
 pre_transform() (*cogdl.wrappers.data_wrapper.node_classification*), 59
 pre_transform() (*cogdl.wrappers.data_wrapper.node_classification*), 59
 pre_transform() (*cogdl.wrappers.data_wrapper.node_classification*), 60
 predict() (*cogdl.models.base_model.BaseModel*), 28
 predict() (*cogdl.models.nn.compgcn.LinkPredictCompGCN*), 42
 predict() (*cogdl.models.nn.deepergcn.DeeperGCN*), 51
 predict() (*cogdl.models.nn.disengcn.DisenGCN*), 53
 predict() (*cogdl.models.nn.drgcn.DrGCN* method), 43
 predict() (*cogdl.models.nn.dropedge_gcn.DropEdge_GCN* method), 53
 predict() (*cogdl.models.nn.gat.GAT* method), 46
 predict() (*cogdl.models.nn.gcnii.GCNII* method), 45
 predict() (*cogdl.models.nn.gdc_gcn.GDC_GCN* method), 41
 predict() (*cogdl.models.nn.grand.Grand* method), 49
 predict() (*cogdl.models.nn.mixhop.MixHop* method), 46
 predict() (*cogdl.models.nn.mlp.MLP* method), 54
 predict() (*cogdl.models.nn.pppnp.PPPNP* method), 47
 predict() (*cogdl.models.nn.pprgo.PPRGo* method), 48
 predict() (*cogdl.models.nn.sgnn.SGNN* method), 54
 predict() (*cogdl.models.nn.sign.MLP* method), 45
 predict() (*cogdl.models.nn.srgcn.SRGCN* method), 55
 predict() (*cogdl.utils.link_prediction_utils.ConvELayer* method), 82
 predict() (*cogdl.utils.link_prediction_utils.DistMultLayer* method), 21
 predict() (*cogdl.wrappers.model_wrapper.MSEModelWrapper* method), 21
 predict_noise() (*cogdl.models.nn.gcnmix.GCNMix* method), 50
 predict() (*cogdl.wrappers.model_wrapper.SAGNModelWrapper* method), 41
 prefetch_factor (*cogdl.data.DataLoader* attribute), 40
 preprocess() (*cogdl.datasets.gcc_data.GCCDataset* method), 21
 preprocess() (*cogdl.models.nn.mvgrl.MVGR* method), 40
 process() (*cogdl.data.Dataset* method), 18
 process() (*cogdl.datasets.PATHSISAN_GraphDataset* method), 20
 process() (*cogdl.datasets.embedding_LikelihoodDataWidgetList* method), 21
 process() (*cogdl.datasets.GTNLinkPredictionDataset* method), 22
 process() (*cogdl.datasets.FullBatchNodeLabelDataWidget* method), 23
 process() (*cogdl.datasets.M38dutuWxqpkg_data.KnowledgeGraphDataset* method), 24
 process() (*cogdl.datasets.SAGNDataWidgetMatlab_matrix.MatlabMatrix* method), 25
 process() (*cogdl.datasets.matlab_matrix.NetworkEmbeddingCMTYDataset* method), 25
 process() (*cogdl.datasets.ogb.OCBNDataset* method), 26
 process() (*cogdl.datasets.ogb.OGBProteinsDataset* method), 26
 process() (*cogdl.datasets.tu_data.TUDataset* method), 27
 processed_file_names (*cogdl.data.Dataset* property),

18
processed_file_names
 (*cogdl.datasets.gatne.GatneDataset* property), 20
processed_file_names
 (*cogdl.datasets.gcc_data.EdgeList* property), 21
processed_file_names
 (*cogdl.datasets.gcc_data.GCCDataset* property), 21
processed_file_names
 (*cogdl.datasets.gtn_data.GTNDataset* property), 22
processed_file_names
 (*cogdl.datasets.han_data.HANDataset* property), 23
processed_file_names
 (*cogdl.datasets.kg_data.KnowledgeGraphDataset* property), 24
processed_file_names
 (*cogdl.datasets.matlab_matrix.MatlabMatrix* property), 25
processed_file_names
 (*cogdl.datasets.matlab_matrix.NetworkEmbeddingCMTXDataset* property), 25
processed_file_names
 (*cogdl.datasets.ogb.OCBNDataset* property), 26
processed_file_names
 (*cogdl.datasets.tu_data.TUDataset* property), 27
processed_paths (*cogdl.data.Dataset* property), 18
ProNE (*class in cogdl.models.emb.prone*), 38
ProNE (*class in cogdl.utils.prone_utils*), 84
ProNEPP (*class in cogdl.models.emb.pronepp*), 34
prop() (*cogdl.models.nn.grace.GRACE* method), 48
prop() (*cogdl.utils.prone_utils.Gaussian* method), 83
prop() (*cogdl.utils.prone_utils.HeatKernel* method), 83
prop() (*cogdl.utils.prone_utils.HeatKernelApproximation* method), 83
prop() (*cogdl.utils.prone_utils.NodeAdaptiveEncoder* static method), 83
prop() (*cogdl.utils.prone_utils.PPR* method), 84
prop() (*cogdl.utils.prone_utils.SignalRescaling* method), 84
prop() (*cogdl.wrappers.model_wrapper.node_classification* method), 65
prop_adjacency() (*cogdl.utils.prone_utils.HeatKernel* method), 83
propagate() (*in module cogdl.utils.prone_utils*), 84
ProteinsDataset (*class in cogdl.datasets.tu_data*), 27
PTCMRDataset (*class in cogdl.datasets.tu_data*), 27
PTE (*class in cogdl.models.emb.pte*), 36

R
rand_prop() (*cogdl.models.nn.grand.Grand* method), 50
random_surfing() (*cogdl.models.emb.dngr.DNGR* method), 34
random_walk() (*cogdl.data.Adjacency* method), 16
random_walk() (*cogdl.data.Graph* method), 19
random_walk() (*in module cogdl.utils.sampling*), 81
random_walk_with_restart() (*cogdl.data.Graph* method), 19
RandomWalker (*class in cogdl.utils.sampling*), 80
raw_edge_weight (*cogdl.data.Graph* property), 19
raw_experiment() (*in module cogdl.experiments*), 87
raw_file_names (*cogdl.data.Dataset* property), 18
raw_file_names (*cogdl.datasets.gatne.GatneDataset* property), 21
raw_file_names (*cogdl.datasets.gcc_data.EdgeList* property), 21
raw_file_names (*cogdl.datasets.gcc_data.GCCDataset* property), 21
raw_file_names (*cogdl.datasets.gtn_data.GTNDataset* property), 22
raw_file_names (*cogdl.datasets.han_data.HANDataset* property), 23
raw_file_names (*cogdl.datasets.kg_data.KnowledgeGraphDataset* property), 24
raw_file_names (*cogdl.datasets.matlab_matrix.MatlabMatrix* property), 25
raw_file_names (*cogdl.datasets.matlab_matrix.NetworkEmbeddingCMTYDataset* property), 25
raw_file_names (*cogdl.datasets.tu_data.TUDataset* property), 27
raw_paths (*cogdl.data.Dataset* property), 18
read_file() (*in module cogdl.datasets.tu_data*), 27
read_gatne_data() (*in module cogdl.datasets.gatne*), 21
read_gtn_data() (*cogdl.datasets.gtn_data.GTNDataset* method), 22
read_gtn_data() (*cogdl.datasets.han_data.HANDataset* method), 23
read_triplet_data() (*in module cogdl.datasets.kg_data*), 24
read_tu_data() (*in module cogdl.datasets.tu_data*), 27
read_txt_array() (*in module cogdl.datasets.tu_data*), 27
RecommendationPipeline (*class in cogdl.pipelines*), 88
recon_loss() (*cogdl.models.nn.daegc.DAEGC* method), 56
recon_loss() (*cogdl.wrappers.model_wrapper.clustering.DAEGCModel* method), 71
record_parameters() (*cogdl.data.DataLoader* method), 17
RedditBinary (*class in cogdl.datasets.tu_data*), 27

RedditMulti12K (*class in cogdl.datasets.tu_data*), 27
 RedditMulti5K (*class in cogdl.datasets.tu_data*), 27
 register_dataset() (*in module cogdl.datasets*), 28
 register_model() (*in module cogdl.models*), 57
 remove_self_loops() (*cogdl.data.Adjacency method*), 16
 remove_self_loops() (*cogdl.data.Graph method*), 19
 remove_self_loops() (*in module cogdl.utils.graph_utils*), 81
 reset_data() (*cogdl.models.nn.gdc_gcn.GDC_GCN method*), 41
 reset_parameters() (*cogdl.layers.disengcn_layer.DisenGCNLayer method*), 42
 reset_parameters() (*cogdl.layers.gat_layer.GATLayer method*), 72
 reset_parameters() (*cogdl.layers.gcn_layer.GCNAyer method*), 72
 reset_parameters() (*cogdl.layers.gcnii_layer.GCNIILayer method*), 73
 reset_parameters() (*cogdl.layers.mixhop_layer.MixHopLayer method*), 78
 reset_parameters() (*cogdl.layers.mlp_layer.MLP method*), 76
 reset_parameters() (*cogdl.layers.pprgo_layer.LinearLayer method*), 76
 reset_parameters() (*cogdl.layers.rgcn_layer.RGCNLayer method*), 77
 reset_parameters() (*cogdl.models.nn.diffpool.DiffPool method*), 44
 reset_parameters() (*cogdl.models.nn.disengcn.DisenGCN method*), 53
 reset_parameters() (*cogdl.models.nn.dropedge_gcn.DropEdgeGCNConfig in module cogdl.experiments*), 87
 reset_parameters() (*cogdl.models.nn.infograph.InfoGraph method*), 52
 ResGNNLayer (*class in cogdl.layers.deepgcn_layer*), 74
 restore() (*cogdl.data.Graph method*), 19
 RGCNLayer (*class in cogdl.layers.rgcn_layer*), 77
 row_indptr (*cogdl.data.Adjacency property*), 16
 row_indptr (*cogdl.data.Graph property*), 19
 row_norm() (*cogdl.data.Adjacency method*), 16
 row_norm() (*cogdl.data.Graph method*), 19
 row_normalization() (*in module cogdl.utils.graph_utils*), 81
 row_ptr_v (*cogdl.data.Adjacency property*), 16
 RowSoftmax (*class in cogdl.utils.srgcn_utils*), 86
 RowUniform (*class in cogdl.utils.srgcn_utils*), 86
 run() (*cogdl.experiments.AutoML method*), 87

S

SAGE (*class in cogdl.models.nn.unsup_graphsage*), 55
 SAGELayer (*class in cogdl.layers.sage_layer*), 73
 SAGNDataWrapper (*class in cogdl.wrappers.data_wrapper.node_classification*), 60
 SAGNModelWrapper (*class in cogdl.wrappers.model_wrapper.node_classification*), 68
 SAINTLayer (*class in cogdl.layers.saint_layer*), 78
 sample_adj() (*cogdl.data.Graph method*), 19
 sample_mask() (*in module cogdl.datasets.han_data*), 23
 sampler (*cogdl.data.DataLoader attribute*), 17
 sampling() (*cogdl.models.nn.graphsage.Graphsage sampling*), 56
 sampling_edge_uniform() (*in module cogdl.utils.link_prediction_utils*), 83
 save_checkpoint() (*cogdl.wrappers.model_wrapper.pretraining.GCCM*), 69
 save_embedding() (*cogdl.models.emb.dgk.DeepGraphKernel method*), 32
 save_embedding() (*cogdl.models.emb.graph2vec.Graph2Vec method*), 34
 scale_matrix() (*cogdl.models.emb.dngr.DNGR method*), 34
 SDNE (*class in cogdl.models.emb.sdne*), 37
 segment() (*in module cogdl.datasets.tu_data*), 27
 SELayer (*class in cogdl.layers.se_layer*), 78
 SelfAuxiliaryModelWrapper (*class in cogdl.wrappers.model_wrapper.node_classification*), 66
 set_asymmetric() (*cogdl.data.Graph method*), 19
 set_asymmetric() (*cogdl.wrappers.model_wrapper.link_prediction.GNNKGLinkPrediction method*), 69
 set_cluster_center() (*cogdl.models.nn.daegc.DAEGC method*), 57
 set_early_stopping() (*cogdl.wrappers.model_wrapper.link_prediction.GNNKGLinkPrediction method*), 69
 set_early_stopping() (*cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPrediction method*), 70
 set_early_stopping() (*cogdl.wrappers.model_wrapper.node_classification.NodeClfModel method*), 67
 set_loss_fn() (*cogdl.models.base_model.BaseModel method*), 28
 set_random_seed() (*in module cogdl.utils.utils*), 80
 set_symmetric() (*cogdl.data.Adjacency method*), 16
 set_symmetric() (*cogdl.data.Graph method*), 19
 set_weight() (*cogdl.data.Adjacency method*), 16
 setup_evaluator() (*in module cogdl.utils.evaluator*), 80
 setup_node_features() (*cogdl.wrappers.data_wrapper.graph_classification.GraphClassifi*)

method), 61
setup_optimizer() (cogdl.wrappers.model_wrapper.clustering.DAEGCModelWrapper
method), 71
setup_optimizer() (cogdl.wrappers.model_wrapper.clustering.GAEModelWrapper
method), 72
setup_optimizer() (cogdl.wrappers.model_wrapper.graph_classification.GINModelWrapper
method), 68
setup_optimizer() (cogdl.wrappers.model_wrapper.graph_classification.GNNLinkPredictionModelWrapper
method), 69
setup_optimizer() (cogdl.wrappers.model_wrapper.heterogeneous.GCNModelWrapper
method), 70
setup_optimizer() (cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPredictionModelWrapper
method), 70
setup_optimizer() (cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPredictionModelWrapper
method), 70
setup_optimizer() (cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPredictionModelWrapper
method), 70
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GRACEModelWrapper
method), 65
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GSAGEModelWrapper
method), 66
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 64
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 64
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 65
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 66
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 65
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 66
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 67
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 68
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 68
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 66
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 66
setup_optimizer() (cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper
method), 69
sgc (class in cogdl.models.nn.sgc), 54
SGCLayer (class in cogdl.layers.sgc_layer), 78
SIGIR_CIKM_GCCDataset (class in cogdl.datasets.gcc_data), 21
SIGMOD_ICDE_GCCDataset (class in cogdl.datasets.gcc_data), 22
SignalRescaling (class in cogdl.utils.prone_utils), 84
sorted_coo2csr() (in module cogdl.utils.graph_utils), 81
SortPool (class in cogdl.models.nn.sortpool), 54
Spectral (class in cogdl.models.emb.spectral), 29
split_dataset() (cogdl.models.nn.diffpool.DiffPool
class method), 44
split_dataset() (cogdl.models.nn.gin.GIN
class method), 49
split_dataset() (cogdl.models.nn.infograph.InfoGraph
class method), 52
split_dataset() (cogdl.models.nn.patchy_san.PatchySAN
method), 54
split_dataset() (cogdl.models.nn.sortpool.SortPool
method), 55
split_dataset_general() (in module cogdl.data)
SRGCN (class in cogdl.models.nn.srgcn), 55
subgraph() (cogdl.data.Graph method), 19
Supervised_HeterogeneousGNNModelWrapper
sup_forward() (cogdl.models.nn.infograph.InfoGraph
method), 73
sup_loss() (cogdl.wrappers.model_wrapper.graph_classification.InfoGraph
method), 80
sym_norm() (cogdl.data.Adjacency method), 16
symmetric_normalization() (in module cogdl.utils.srgcn_utils), 86
T
tabulate_results() (in module cogdl.utils.utils), 80
taylor() (cogdl.utils.prone_utils.HeatKernelApproximation
method), 83
test_nid (cogdl.data.Graph property), 20
test_start_idx (cogdl.datasets.rgbd_data.KnowledgeGraphDataset
property), 24
test_step() (cogdl.wrappers.model_wrapper.clustering.AGCMModelWrapper
method), 71
test_step() (cogdl.wrappers.model_wrapper.clustering.DAEGCModelWrapper
method), 71
test_step() (cogdl.wrappers.model_wrapper.clustering.GAEModelWrapper
method), 72
test_step() (cogdl.wrappers.model_wrapper.graph_classification.Graph
method), 68
test_step() (cogdl.wrappers.model_wrapper.graph_classification.InfoGraph
method), 69
test_step() (cogdl.wrappers.model_wrapper.heterogeneous.Heterogeneous
method), 70
test_step() (cogdl.wrappers.model_wrapper.heterogeneous.Heterogeneous
method), 70
test_step() (cogdl.wrappers.model_wrapper.heterogeneous.MultiplexEmbedding
method), 71
test_step() (cogdl.wrappers.model_wrapper.link_prediction.Embedding
method), 69
test_step() (cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPrediction
method), 70
test_step() (cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPrediction
method), 70
test_step() (cogdl.wrappers.model_wrapper.node_classification.Correct
method), 67

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.DGIMModelWrapper` attribute), 17
 `method`), 64
`to_networkx()` (`cogdl.data.Adjacency` method), 16

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.GRACModelWrapper` attribute), 20
 `method`), 64
`to_scipy_csr()` (`cogdl.data.Adjacency` method), 16

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.GraphSAGEModelWrapper` attribute), 20
 `method`), 65
`to_undirected()` (in module `cogdl.utils.graph_utils`), 20

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.GraphSAGEModelWrapper` method), 66
`topk_ppr_matrix()` (in module `cogdl.utils.ppr_utils`), 20

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.MVGRLModelWrapper` method), 65
`train()` (`cogdl.data.Graph` method), 20

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.NetworkEmbeddingModelWrapper` attribute), 87
 `method`), 67
`train_nid` (`cogdl.data.Graph` property), 20

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.StateOfMindDataset.kg_data.KnowledgeGraphDataset` method), 67
`property`), 24

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.SPAEGCModelWrapper` method), 71
`train_step()` (`cogdl.wrappers.model_wrapper.clustering.AGCModelWrapper` method), 71

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.SPAEGCMModelWrapper` method), 71
`train_step()` (`cogdl.wrappers.model_wrapper.clustering.DAEGCModelWrapper` method), 71

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.SPAEGAModelWrapper` method), 66
`train_step()` (`cogdl.wrappers.model_wrapper.clustering.GAEModelWrapper` method), 72

`test_step()` (`cogdl.wrappers.model_wrapper.node_classification.SPAEGMModelWrapper` method), 68
`train_step()` (`cogdl.wrappers.model_wrapper.graph_classification.GraphSAGEModelWrapper` method), 68

`test_transform()` (`cogdl.wrappers.data_wrapper.node_classification.GNNModelWrapper` method), 60
`train_step()` (`cogdl.wrappers.model_wrapper.graph_classification.GraphSAGEModelWrapper` method), 68

`test_wrapper()` (`cogdl.wrappers.data_wrapper.graph_classification.GCNModelWrapper` method), 61
`train_step()` (`cogdl.wrappers.model_wrapper.graph_classification.InfoCEModelWrapper` method), 69

`test_wrapper()` (`cogdl.wrappers.data_wrapper.graph_classification.HeterogeneousModelWrapper` method), 61
`train_step()` (`cogdl.wrappers.model_wrapper.heterogeneous.HeterogeneousModelWrapper` method), 70

`test_wrapper()` (`cogdl.wrappers.data_wrapper.graph_classification.HeterogeneousModelWrapper` method), 61
`train_step()` (`cogdl.wrappers.model_wrapper.heterogeneous.HeterogeneousModelWrapper` method), 71

`test_wrapper()` (`cogdl.wrappers.data_wrapper.heterogeneous.HeterogeneousModelWrapper` method), 63
`train_step()` (`cogdl.wrappers.model_wrapper.heterogeneous.MultiplexEmbeddingModelWrapper` method), 71

`test_wrapper()` (`cogdl.wrappers.data_wrapper.heterogeneous.HeterogeneousModelWrapper` method), 63
`train_step()` (`cogdl.wrappers.model_wrapper.link_prediction.EmbeddingModelWrapper` method), 69

`test_wrapper()` (`cogdl.wrappers.data_wrapper.heterogeneous.HeterogeneousModelWrapper` method), 64
`train_step()` (`cogdl.wrappers.model_wrapper.link_prediction.GNNKGLModelWrapper` method), 70

`test_wrapper()` (`cogdl.wrappers.data_wrapper.link_prediction.GNNLinkPredictionModelWrapper` method), 62
`train_step()` (`cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPredictionModelWrapper` method), 70

`test_wrapper()` (`cogdl.wrappers.data_wrapper.link_prediction.GNNGPLinkPredictionModelWrapper` method), 62
`train_step()` (`cogdl.wrappers.model_wrapper.node_classification.DGIMModelWrapper` method), 64

`test_wrapper()` (`cogdl.wrappers.data_wrapper.link_prediction.GNNGPLinkPredictionModelWrapper` method), 63
`train_step()` (`cogdl.wrappers.model_wrapper.node_classification.GCNModelWrapper` method), 65

`test_wrapper()` (`cogdl.wrappers.data_wrapper.node_classification.GRACModelWrapper` method), 58
`train_step()` (`cogdl.wrappers.model_wrapper.node_classification.GRACModelWrapper` method), 65

`test_wrapper()` (`cogdl.wrappers.data_wrapper.node_classification.GRACModelWrapper` method), 59
`train_step()` (`cogdl.wrappers.model_wrapper.node_classification.GRACModelWrapper` method), 65

`test_wrapper()` (`cogdl.wrappers.data_wrapper.node_classification.GraphSAGEModelWrapper` method), 58
`train_step()` (`cogdl.wrappers.model_wrapper.node_classification.GraphSAGEModelWrapper` method), 66

`test_wrapper()` (`cogdl.wrappers.data_wrapper.node_classification.MVGRLModelWrapper` method), 59
`train_step()` (`cogdl.wrappers.model_wrapper.node_classification.MVGRLModelWrapper` method), 65

`test_wrapper()` (`cogdl.wrappers.data_wrapper.node_classification.NetworkEmbeddingModelWrapper` method), 60
`train_step()` (`cogdl.wrappers.model_wrapper.node_classification.NetworkEmbeddingModelWrapper` method), 67

`test_wrapper()` (`cogdl.wrappers.data_wrapper.node_classification.NodeClassificationModelWrapper` method), 60
`train_step()` (`cogdl.wrappers.model_wrapper.node_classification.NodeClassificationModelWrapper` method), 67

<code>train_step()</code> (<code>cogdl.wrappers.model_wrapper.node_classification.PPRGModelWrapper</code> <code>method</code>), 68	<code>training</code> (<code>cogdl.layers.deepgcn_layer.EdgeEncoder</code>	
<code>train_step()</code> (<code>cogdl.wrappers.model_wrapper.node_classification.SAGEModelWrapper</code> <code>method</code>), 68	<code>training</code> (<code>cogdl.layers.deepgcn_layer.GENConv</code> at- <code>train_step()</code> (<code>cogdl.wrappers.model_wrapper.node_classification.SelfAttModelWrapper</code> <code>method</code>), 66	<code>training</code> (<code>cogdl.layers.deepgcn_layer.ResGNNLayer</code>
<code>train_step()</code> (<code>cogdl.wrappers.model_wrapper.node_classification.DisenGCNModelWrapper</code> <code>method</code>), 66	<code>training</code> (<code>cogdl.layers.disengcn_layer.DisenGCNLayer</code>	
<code>train_step()</code> (<code>cogdl.wrappers.model_wrapper.pretraining.GCCModelWrapper</code> 75 <code>method</code>), 69	<code>training</code> (<code>cogdl.layers.gat_layer.GATLayer</code> attribute),	
<code>train_step_finetune()</code>	72	
(<code>cogdl.wrappers.model_wrapper.pretraining.GCCModelWrapper</code> 75 <code>method</code>), 69	<code>training</code> (<code>cogdl.layers.gcn_layer.GCNLayer</code> attribute),	
<code>train_step_pretraining()</code>	72	
(<code>cogdl.wrappers.model_wrapper.pretraining.GCCModelWrapper</code> 73 <code>method</code>), 69	<code>training</code> (<code>cogdl.layers.gcnii_layer.GCNIILayer</code> at- <code>train_step_pretraining()</code> (<code>cogdl.wrappers.model_wrapper.GCNIIModelWrapper</code> 73 <code>method</code>), 69	<code>training</code> (<code>cogdl.layers.gin_layer.GINLayer</code> attribute),
<code>train_test_edge_split()</code>	73	
(<code>cogdl.wrappers.data_wrapper.link_prediction.GNNLinkPredictionDataWrapper</code> 75 <code>static method</code>), 63	<code>training</code> (<code>cogdl.layers.attention_layer.AttentionLayer</code> at- <code>train_transform()</code> (<code>cogdl.wrappers.data_wrapper.SAGEDataWrapper</code> 76 <code>method</code>), 58	75
<code>train_transform()</code> (<code>cogdl.wrappers.data_wrapper.SAGENodeMixHopperlayer</code> 78 <code>method</code>), 60	<code>training</code> (<code>cogdl.layers.mixhoplayer.MixHopLayer</code> at- <code>train_transform()</code> (<code>cogdl.wrappers.data_wrapper.GNNDataWrapper</code> 78 <code>method</code>), 61	78
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.graph_classification.GNNClassificationDataWrapper</code> 76 <code>method</code>), 61	<code>training</code> (<code>cogdl.layers.pprgo_layer.LinearLayer</code> at- <code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.GraphEmbeddingDataWrapper</code> <code>method</code>), 61	76
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.heterogeneous.HeterogeneousEmbeddingDataWrapper</code> <code>method</code>), 63	<code>training</code> (<code>cogdl.layers.pprgo_layer.PPRGoLayer</code>	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.heterogeneous.HeterogeneousGNNDatWrapper</code> <code>method</code>), 63	<code>training</code> (<code>cogdl.layers.sage_layer.SAGELayer</code> at- <code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.heterogeneous.MultiplexEmbeddingDataWrapper</code> <code>method</code>), 64	63
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.heterogeneous.MultiplexEmbeddingDataWrapper</code> <code>method</code>), 64	<code>training</code> (<code>cogdl.layers.saint_layer.SAINTLayer</code> at- <code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.link_prediction.EmbeddingLinkPredictionDataWrapper</code> <code>method</code>), 62	64
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.link_prediction.EmbeddingLinkPredictionDataWrapper</code> <code>method</code>), 62	<code>training</code> (<code>cogdl.layers.se_layer.SELayer</code> attribute), 78	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.link_prediction.NKGDataWrapper</code> 78 <code>method</code>), 62	<code>training</code> (<code>cogdl.layers.nkg_layer.NKGDataWrapper</code> 78 <code>attribute</code>), 78	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.link_prediction.NLPDataWrapper</code> 28 <code>method</code>), 63	<code>training</code> (<code>cogdl.layers.nlp_layer.NLPDataWrapper</code> 28 <code>attribute</code>), 28	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.node_classification.ClusteringGraphKernel</code> 31 <code>method</code>), 58	<code>training</code> (<code>cogdl.layers.clustering.DeepWalk</code> attribute), 31	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.node_classification.ClusteringGraphKernel</code> 32 <code>method</code>), 59	<code>training</code> (<code>cogdl.layers.clustering.GCNKernel</code> attribute), 32	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.node_classification.GATNE</code> 34 <code>method</code>), 58	<code>training</code> (<code>cogdl.models.emb.gatne.GATNE</code> attribute),	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.node_classification.Hope</code> 29 <code>method</code>), 60	<code>training</code> (<code>cogdl.models.emb.hope.HOPE</code> attribute), 29	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.node_classification.GraRep</code> 37 <code>method</code>), 60	<code>training</code> (<code>cogdl.models.emb.grarep.GraRep</code> attribute),	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.node_classification.Hin2vec</code> 37 <code>method</code>), 60	<code>training</code> (<code>cogdl.models.emb.hin2vec.Hin2vec</code> attribute),	
<code>train_wrapper()</code> (<code>cogdl.wrappers.data_wrapper.pretraining.GCCDataWrapper</code> 20 <code>method</code>), 62	<code>training</code> (<code>cogdl.models.emb.line.LINE</code> attribute), 37	
<code>training</code> (<code>cogdl.layers.deepgcn_layer.BondEncoder</code>)	<code>training</code> (<code>cogdl.models.emb.line.LINE</code> attribute), 37	

training (*cogdl.models.emb.metapath2vec.Metapath2vec attribute*), 35
training (*cogdl.models.emb.netmf.NetMF attribute*), 30
training (*cogdl.models.emb.netsmf.NetSMF attribute*), 37
training (*cogdl.models.emb.node2vec.Node2vec attribute*), 36
training (*cogdl.models.emb.prone.ProNE attribute*), 39
training (*cogdl.models.emb.pronepp.ProNEPP attribute*), 34
training (*cogdl.models.emb.pte.PTE attribute*), 36
training (*cogdl.models.emb.sdne.SDNE attribute*), 38
training (*cogdl.models.emb.spectral.Spectral attribute*), 29
training (*cogdl.models.nn.agc.AGC attribute*), 57
training (*cogdl.models.nn.compgcn.LinkPredictCompGCN attribute*), 42
training (*cogdl.models.nn.daegc.DAEGC attribute*), 57
training (*cogdl.models.nn.deepergcn.DeeperGCN attribute*), 51
training (*cogdl.models.nn.dgi.DGIModel attribute*), 39
training (*cogdl.models.nn.diffpool.DiffPool attribute*), 44
training (*cogdl.models.nn.disengcn.DisenGCN attribute*), 53
training (*cogdl.models.nn.drgat.DrGAT attribute*), 52
training (*cogdl.models.nn.drgcn.DrGCN attribute*), 43
training (*cogdl.models.nn.dropedge_gcn.DropEdge_GCN attribute*), 53
training (*cogdl.models.nn.gat.GAT attribute*), 46
training (*cogdl.models.nn.gcn.GCN attribute*), 41
training (*cogdl.models.nn.gcnii.GCNII attribute*), 45
training (*cogdl.models.nn.gcnmix.GCNMix attribute*), 43
training (*cogdl.models.nn.gdc_gcn.GDC_GCN attribute*), 41
training (*cogdl.models.nn.gin.GIN attribute*), 49
training (*cogdl.models.nn.grace.GRACE attribute*), 48
training (*cogdl.models.nn.grand.Grand attribute*), 50
training (*cogdl.models.nn.graph_unet.GraphUnet attribute*), 43
training (*cogdl.models.nn.graphsage.Graphsage attribute*), 42
training (*cogdl.models.nn.gtn.GTN attribute*), 50
training (*cogdl.models.nn.han.HAN attribute*), 47
training (*cogdl.models.nn.infograph.InfoGraph attribute*), 52
training (*cogdl.models.nn.mixhop.MixHop attribute*), 46
training (*cogdl.models.nn.mlp.MLP attribute*), 54
training (*cogdl.models.nn.mvgrl.MVGRL attribute*), 40
training (*cogdl.models.nn.patchy_san.PatchySAN attribute*), 40
training (*cogdl.models.nn.pppnp.PPNP attribute*), 47
training (*cogdl.models.nn.pprgo.PPRGo attribute*), 48
training (*cogdl.models.nn.rgcn.LinkPredictRGCN attribute*), 50
training (*cogdl.models.nn.sgc.sgc attribute*), 54
training (*cogdl.models.nn.sign.MLP attribute*), 45
training (*cogdl.models.nn.sortpool.SortPool attribute*), 55
training (*cogdl.models.nn.srgcn.SRGCN attribute*), 55
training (*cogdl.models.nn.unsup_graphsage.SAGE attribute*), 56
training (*cogdl.utils.evaluator.BCEWithLogitsLoss attribute*), 80
training (*cogdl.utils.evaluator.CrossEntropyLoss attribute*), 80
training (*cogdl.utils.link_prediction_utils.ConvELayer attribute*), 82
training (*cogdl.utils.link_prediction_utils.DistMultLayer attribute*), 82
training (*cogdl.utils.link_prediction_utils.GNNLinkPredict attribute*), 82
training (*cogdl.utils.srgcn_utils.ColumnUniform attribute*), 84
training (*cogdl.utils.srgcn_utils.EdgeAttention attribute*), 84
training (*cogdl.utils.srgcn_utils.Gaussian attribute*), 85
training (*cogdl.utils.srgcn_utils.HeatKernel attribute*), 85
training (*cogdl.utils.srgcn_utils.Identity attribute*), 85
training (*cogdl.utils.srgcn_utils.NodeAttention attribute*), 85
training (*cogdl.utils.srgcn_utils.NormIdentity attribute*), 86
training (*cogdl.utils.srgcn_utils.PPR attribute*), 86
training (*cogdl.utils.srgcn_utils.RowSoftmax attribute*), 86
training (*cogdl.utils.srgcn_utils.RowUniform attribute*), 86
training (*cogdl.utils.srgcn_utils.SymmetryNorm attribute*), 87
training (*cogdl.wrappers.model_wrapper.clustering.AGCModelWrapper attribute*), 71
training (*cogdl.wrappers.model_wrapper.clustering.DAEGCModelWrapper attribute*), 71
training (*cogdl.wrappers.model_wrapper.clustering.GAEModelWrapper attribute*), 72
training (*cogdl.wrappers.model_wrapper.graph_classification.GraphClassification attribute*), 68
training (*cogdl.wrappers.model_wrapper.graph_classification.GraphEmbedding attribute*), 68
training (*cogdl.wrappers.model_wrapper.graph_classification.InfoGraph attribute*), 69
training (*cogdl.wrappers.model_wrapper.heterogeneous.HeterogeneousEncoder attribute*), 70
training (*cogdl.wrappers.model_wrapper.heterogeneous.HeterogeneousGraph attribute*), 70

attribute), 71
training (cogdl.wrappers.model_wrapper.heterogeneous.MultiplexedLinkPredictionModelWrapper (in module cogdl.utils.utils), 80
attribute), 71
training (cogdl.wrappers.model_wrapper.link_prediction.EdgeLabelingPredictionModelWrapper.node_classification.GCNMethod), 65
attribute), 69
training (cogdl.wrappers.model_wrapper.link_prediction.GCNKEISOPredictiveModelWrapper.node_classification.GCNMethod), 65
attribute), 70
training (cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPredictionModelWrapperDataset attribute), 21
attribute), 70
url (cogdl.datasets.gcc_data.EdgeList attribute), 21
training (cogdl.wrappers.model_wrapper.node_classification.GCNModelSmoothModelWrapperGCDDataset attribute), 21
attribute), 67
url (cogdl.datasets.kg_data.KnowledgeGraphDataset attribute), 22
training (cogdl.wrappers.model_wrapper.node_classification.DGIModelWrapper
attribute), 64
url (cogdl.datasets.tu_data.TUDataset attribute), 27
training (cogdl.wrappers.model_wrapper.node_classification.GRACEModelWrapper
attribute), 65
V
training (cogdl.wrappers.model_wrapper.node_classification.ValGridModelWrapperGraph property), 20
attribute), 65
val_step() (cogdl.wrappers.model_wrapper.graph_classification.GraphClassificationModelWrapper
attribute), 66
val_step() (cogdl.wrappers.model_wrapper.heterogeneous.HeterogeneousModelWrapper
attribute), 66
val_step() (cogdl.wrappers.model_wrapper.link_prediction.GNNKGLinkPredictionModelWrapper
attribute), 67
val_step() (cogdl.wrappers.model_wrapper.link_prediction.GNNLinkPredictionModelWrapper
attribute), 67
val_step() (cogdl.wrappers.model_wrapper.node_classification.CorrectSAGEModelWrapper
attribute), 67
val_step() (cogdl.wrappers.model_wrapper.node_classification.GCNMixModelWrapper
attribute), 66
val_step() (cogdl.wrappers.model_wrapper.node_classification.M3SMModelWrapper
attribute), 66
val_step() (cogdl.wrappers.model_wrapper.link_prediction.GNNKGLinkPredictionModelWrapper
attribute), 67
val_step() (cogdl.wrappers.model_wrapper.node_classification.NetworkEmbeddingModelWrapper
attribute), 67
val_step() (cogdl.wrappers.model_wrapper.node_classification.NodeClassificationModelWrapper
attribute), 67
val_step() (cogdl.wrappers.model_wrapper.node_classification.NodeClassificationModelWrapper
attribute), 68
val_step() (cogdl.wrappers.model_wrapper.node_classification.PPRGModelWrapper
attribute), 68
val_step() (cogdl.wrappers.model_wrapper.node_classification.GraphSAGENodeModelWrapper
attribute), 68
val_step() (cogdl.wrappers.model_wrapper.node_classification.SAGENodeModelWrapper
attribute), 68
val_step() (cogdl.wrappers.model_wrapper.node_classification.NodeClassificationModelWrapper
attribute), 68
val_step() (cogdl.wrappers.model_wrapper.node_classification.SelfAttentionModelWrapper
attribute), 66
val_step() (cogdl.wrappers.model_wrapper.node_classification.PPRGModelWrapper
attribute), 66
val_step() (cogdl.wrappers.model_wrapper.node_classification.UnsupGraphSAGEModelWrapper
attribute), 66
val_step() (cogdl.wrappers.model_wrapper.node_classification.SAGENodeModelWrapper
attribute), 68
val_transform() (cogdl.wrappers.data_wrapper.node_classification.GraphClassificationModelWrapper
method), 58
try_adding_dataset_args() (in module cogdl.datasets), 28
try_adding_model_args() (in module cogdl.models), 57
TUDataSet (class in cogdl.datasets.tu_data), 27
TwitterDataset (class in cogdl.datasets.gatne), 21

U

unsup_forward() (cogdl.models.nn.infograph.InfoGraph
method), 52
unsup_loss() (cogdl.wrappers.model_wrapper.graph_classification.InfoGraphModelWrapper
method), 69
UnsupGraphSAGEModelWrapper (class in cogdl.wrappers.model_wrapper.node_classification), 58
66
val_wrapper() (cogdl.wrappers.data_wrapper.node_classification.FullBatchModelWrapper
method), 59

`val_wrapper()` (*cogdl.wrappers.data_wrapper.node_classification.GraphSAGEDataWrapper method*), 58
`val_wrapper()` (*cogdl.wrappers.data_wrapper.node_classification.PPRGoDataWrapper method*), 60
`val_wrapper()` (*cogdl.wrappers.data_wrapper.node_classification.SAGNDATAWrapper method*), 60
`valid_start_idx` (*cogdl.datasets.kg_data.KnowledgeGraphDataset property*), 24
`variant_args_generator()` (in *cogdl.experiments*), 87

W

`walk()` (*cogdl.utils.sampling.RandomWalker method*), 81
`WikipediaDataset` (class in *cogdl.datasets.matlab_matrix*), 25
`wl_iterations()` (*cogdl.models.emb.dgk.DeepGraphKernel static method*), 32
`wl_iterations()` (*cogdl.models.emb.graph2vec.Graph2Vec static method*), 34
`WN18Dataset` (class in *cogdl.datasets.kg_data*), 24
`WN18RRDataset` (class in *cogdl.datasets.kg_data*), 24

Y

`YouTubeDataset` (class in *cogdl.datasets.gatne*), 21
`YoutubeNEDataset` (class in *cogdl.datasets.matlab_matrix*), 25